

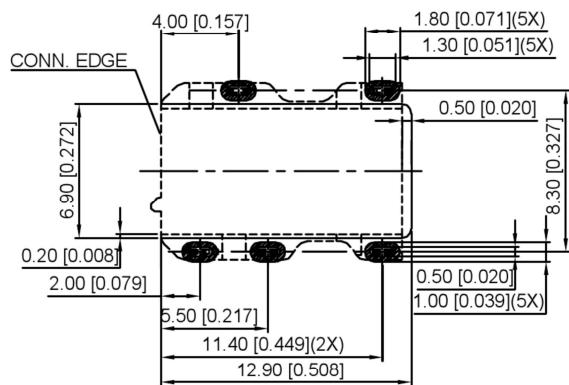
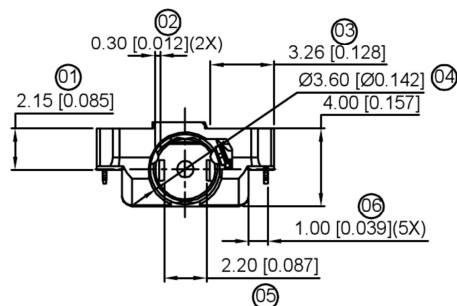
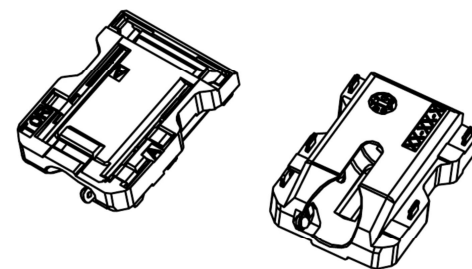
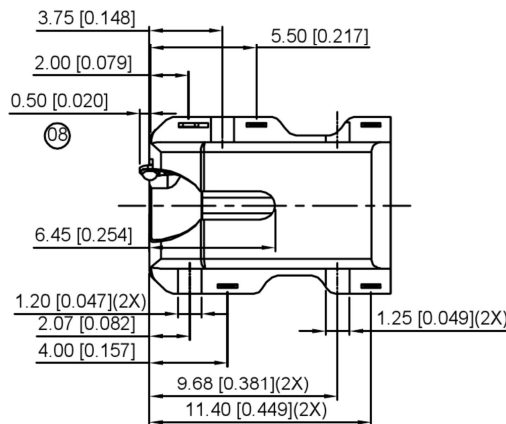


(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)


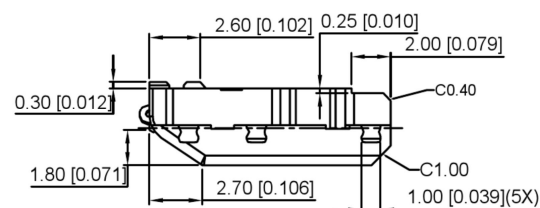


RECOMMENDED PCB LAYOUT (COMPONENT SIDE)

T=0.70mm, TOL:±0.05

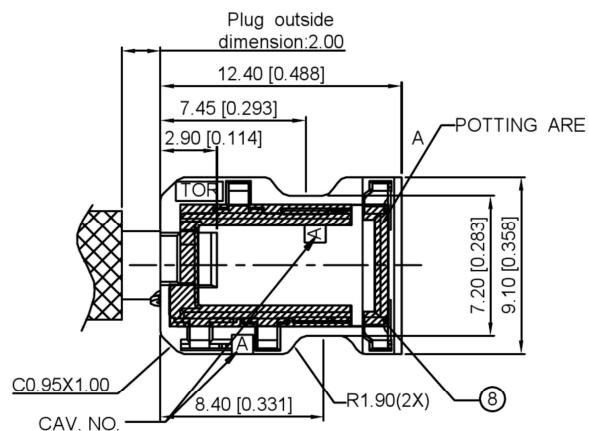

3D VIEW

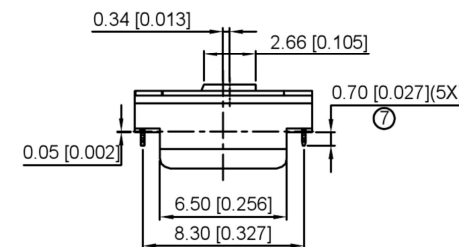

SCHEMATIC

NOTES:

- CONTACT CURRENT RATING: 1A;
- CONTACT RESISTANCE: 50 mΩ MAX;
- INSULATION RESISTANCE: 100MΩ MIN;
- DIELECTRIC WITHSTANDING: 500V AC MIN;
- DURABILITY: 10,000 CYCLES MIN;
- CONNECTOR MATING FORCES: 19.6N (2.00KgFMax);
- CONNECTOR UNMATING FORCES:
TEST BEFORE: 6.85~19.6N (0.70~2.00KgF);
TEST AFTER: 3.90~19.6N (0.40~2.00KgF); ^②
- MARKED ⊗ DIMENSION SHOULD BE MEASURED BY FAI;
- MARKED ▼ DIMENSION SHOULD BE MEASURED BY QIP.

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
DWN		VIEW:	PART NO.: PJ-3026		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
			WEIGHT	SHEET	REVISION
				1/1	A0