


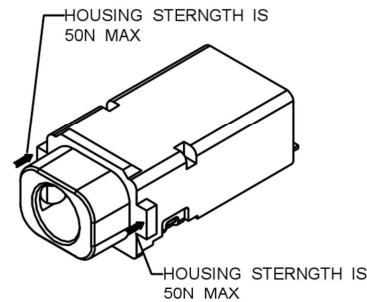
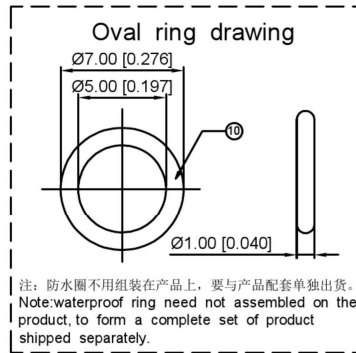

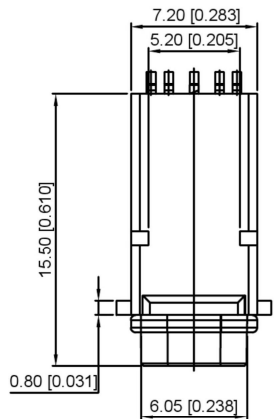
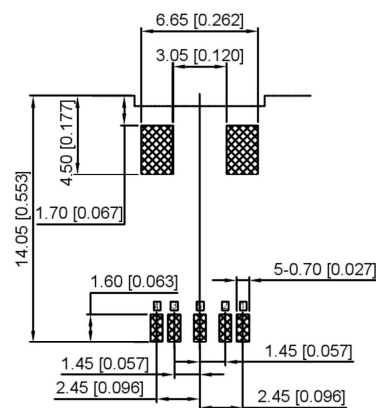
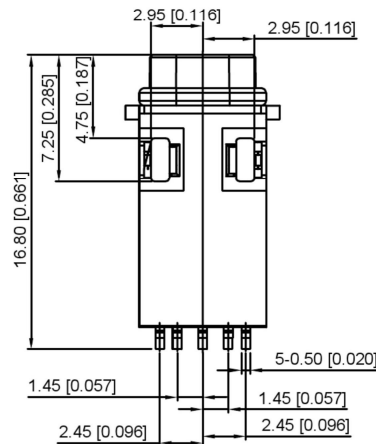
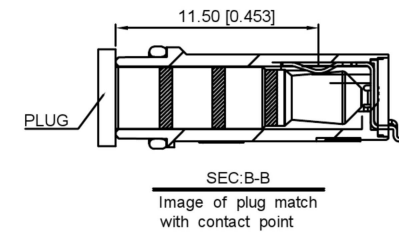

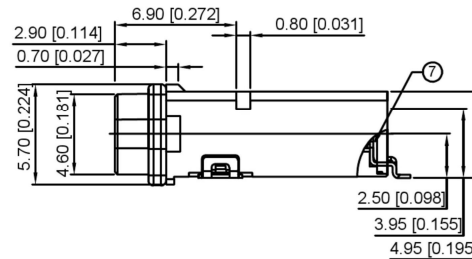




- SPECIFICATIONS:
- 1.INSULATION RESISTANCE:A VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS, AFTER WHICH MEASUREMENT SHALL BE MADE, A GAUGE FOR THE MEASUREMENT SHALL BE USED THE INSULATEDGAUGE.
 - 2.CONTACT RESISTANCE: 30mΩ OR LESS.
 - 3.VOLTAGE PROOF:500V AC FOR ONE MINUTE.
 - 4.DURABILITY:5,000 INSERTION/REMOVAL CYCLES(MINIMUM).
 - 5.INSERTION FORCE:0.6KGF~2.0KGF.
 - 6.WITHDRAWAL FORCE:0.6KGF~2.0KGF.
 - 7.WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX5/7 OF THE JIS STANDARD.
 - 8.USING PLUG:Ø3.5MM. 4-POLE STEREO EARPHONE(LCH/RCH/GND/MIC) PROVIDED THAT THEY CONFORM TO JIS C6560.
 - 9.HOUSING STERNNGTH IS 50N MAX.

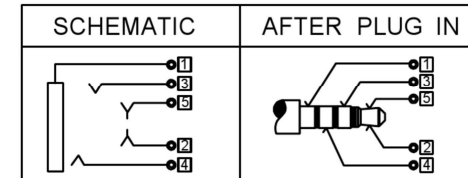

Recommended PCB Layout
Tolerance: ±0.1(Top view)

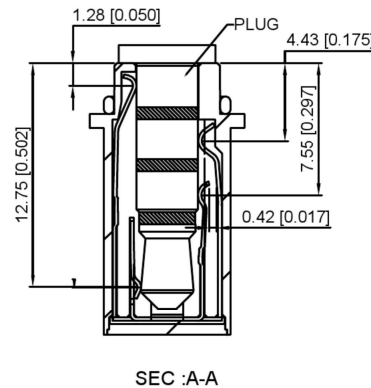

10	Oval ring			
9	BOND			
8	TERMINAL			Au PLATED
7	COVER	HIGH TEMP	BLACK	UL 94V-0
6	HOUSING	HIGH TEMP	BLACK	UL 94V-0
5	TERMINAL 5	COPPER ALLOY		Au PLATED
4	TERMINAL 4	COPPER ALLOY		Au PLATED
3	TERMINAL 3	COPPER ALLOY		Au PLATED
2	TERMINAL 2	COPPER ALLOY		Au PLATED
1	TERMINAL 1	COPPER ALLOY		Au PLATED

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	3.5 PHONE JACK
CHKD		UNIT: mm/in	PART NO.: PJ-3255
APPD		SIZE: A4	DWG NO.:
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET
			REVISION
			1/1
			A0