

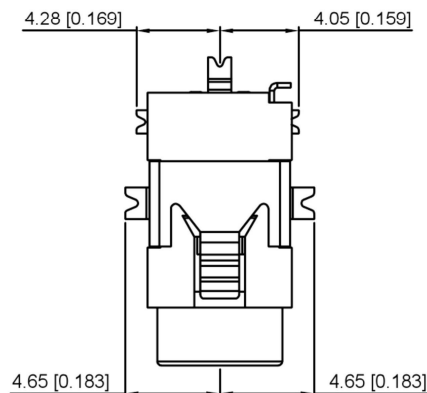
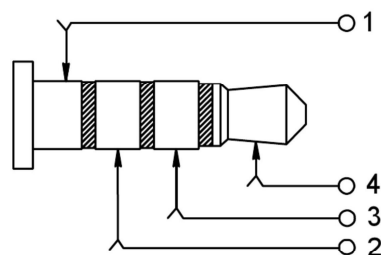
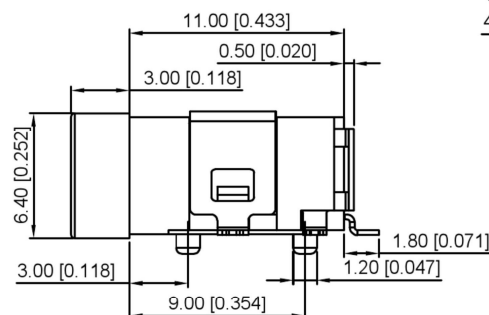




PJ-3941

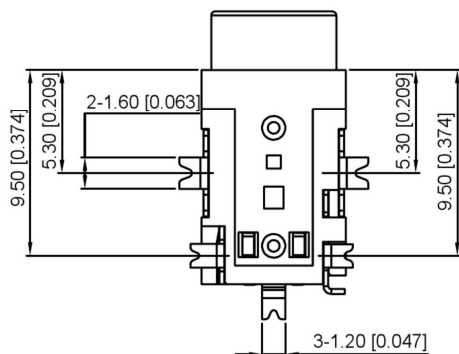

SCHEMATIC

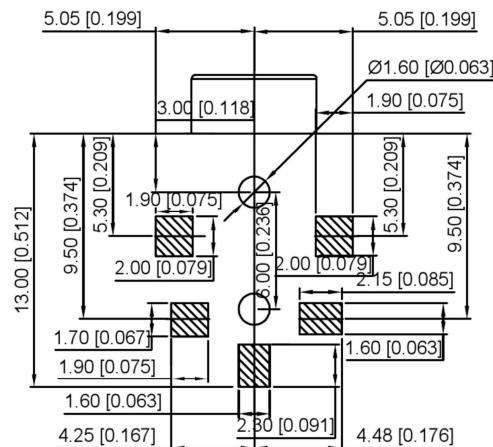

RECOMMENDED P.C.B LAYOUT(TOP CIEW)
(GENERAL TOLERANCE ±0.05)

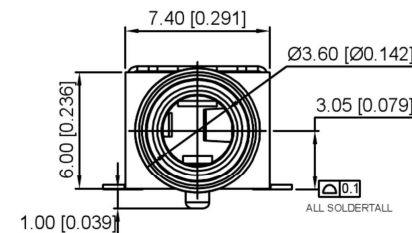

PJ-3942

COPPER SLEEVE

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING:12V 1A
- 1-2.CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100M MIN. MEASURED BY 500V DC

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE: 4~30N
- 2-2.WITHDRAWAL FORCE:4~30N
- 3.LIFE TEST: 5,000 CYCLES MIN.

PJ-394X-X-SMT

S:silver
G:gold

	MATERIAL	PLATING
terminal 1	copper alloy	ag/au
terminal 2	copper alloy	ag/au
terminal 3	copper alloy	ag/au
terminal 4	copper alloy	ag/au
shell	copper alloy	ag/au
plastic	PPA	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-394X-X-SMT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET
			REVISION
			1/1
			A0