

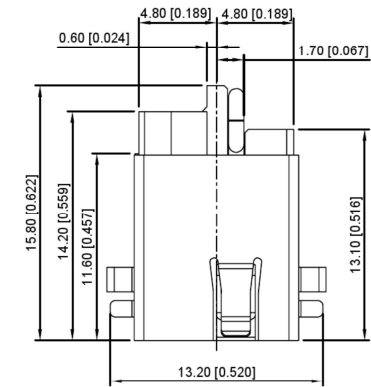
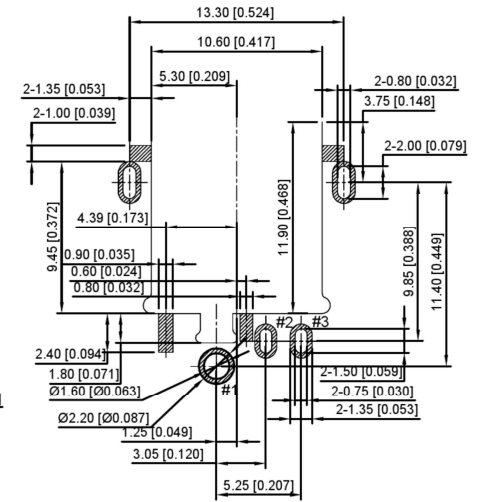





SECTION A-A

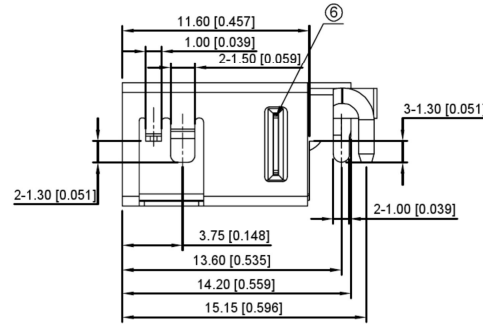


PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05

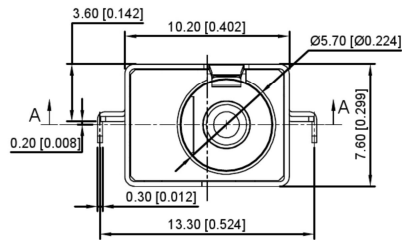


SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS
 - 1-1.RATING:DC 20V, 10A Min
 - 1-2.CONTACT RESISTANCE:30MΩ Max.(INITIAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
 - 1-4.INSULATION RESISTANCE:100 MΩ Min. MEASURED BY 500V DC.
- MECHANICAL CHARACTERISTICS:
 - 2-1.INSERTION FORCE:3.0 KGF Max.
 - 2-2.WITHDRAWAL FORCE:0.35 KGF Min.
- LIFE TEST:5000 CYCLES MIN.

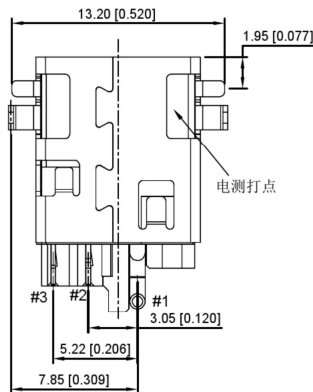

电测打点

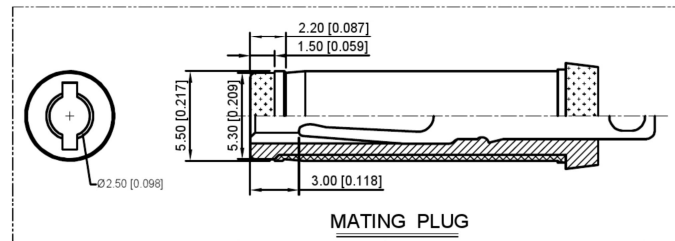

MATING PLUG

⑥	TERMINAL	1	SUS301	N/A
⑤	SHELL	1	C2680R-EH	Ni 50U
④	CENTER PIN(+)	1	C3601	Gold Flash Ocer Ni 50U
③	SHUNT TERMINAL	1	C2680E-EH	Gold Flash On Contact Area: 100U, Sn On Solder Tail All Over Ni 50U Min.
②	TIP SPRING(-)	1	C5210R-EH	
①	HOUSING	1	LCP UL 94V-0(HF)	BLACK
NO.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	DC POWER JACK
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	DC-011D-10A-2.5
			DWG NO.:
			WEIGHT
			SHEET
			REVISION
			1/1
			A0