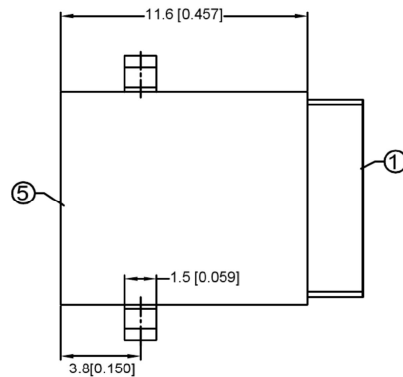
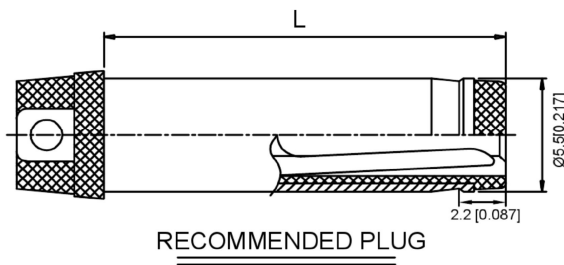
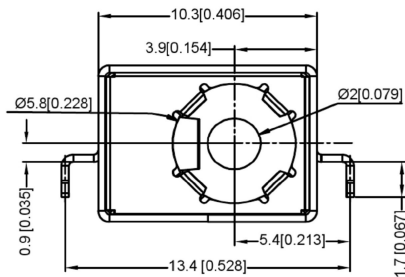
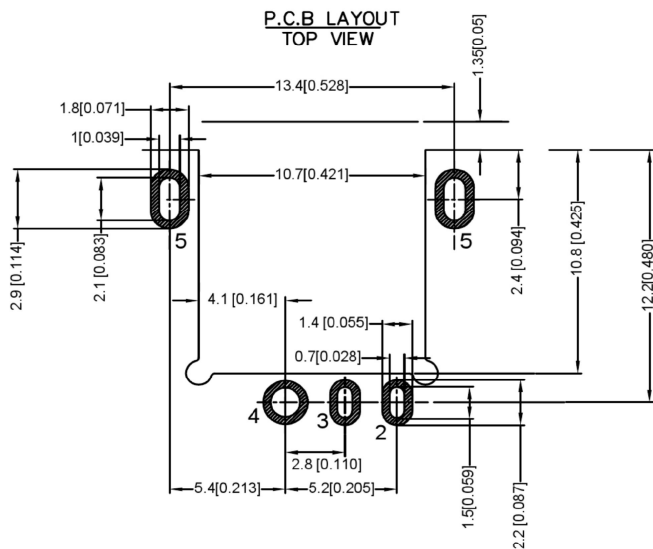


SPECIFICATION

规格

1.Rating :DC 20V 5.5A;

额定值: 直流20V 5.5A;

2.Contact resistance:<0.03Ω;

接触电阻: <0.03Ω;

3.Insulation resistance:2100MΩ(DC250V)

绝缘电阻: 2100MΩ(DC250V)

4.Withstand voltage:500VAC

耐压: 500VAC

5.Insertion and extraction force:3-30N;

插拔力: 3-30N;

6.life test:5.000 cycles.

寿命试验: 5.000次循环。

SCHEMATIC	
Model	DC-C033D-5.5A
Center Pin	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
center pin	Brass	tin
coat	Sus	
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Brass	tin
plastic	Pa9t	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
DWN		VIEW: 	PART NO.: DC-C033D-5.5A-2.5		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0