
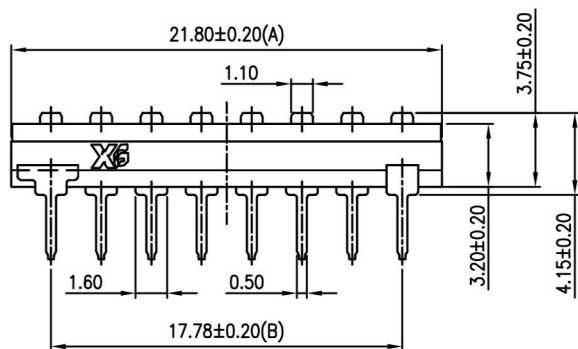


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



PART NO.	N0.OFPOS	DIM.A	DIM.B
XB-DSDT-4P	4	10.16	7.62
XB-DSDT-5P	5	12.7	10.16
XB-DSDT-6P	6	15.24	12.7
XB-DSDT-7P	7	17.78	15.24
XB-DSDT-8P	8	20.32	17.78

SPECIFICATION

Contact Rating:	25mA,24V DC
Contact Resistance:	50mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	500V AC/1minute
Operating Force:	1000gf max
Travel:	2mm
Operating Life:	3000cycles
Operating Temp:	-20℃~+70℃
Storage Temp:	-30℃~+80℃

4	Terminal		Copper Alloy	T: Tin plated G: Plating Gold≥15MU
3	Base	1	Pa66	Black
2	Keystake	1	Pa66	white
1	Cover	1	Pa66	Black Blue Red
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	DIP SWITCH
CHKD		UNIT: mm/in	PART NO.: DS-XX-X-X
APPD		SIZE: A4	DWG NO.:
			WEIGHT
			SHEET
			REVISI
			1/1
			A0

DONG GUAN XI BANG ELECTRONIC CO., LTD