

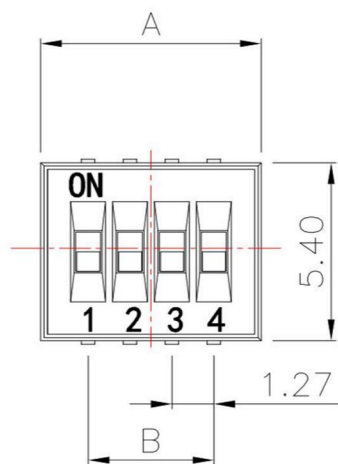


Circuit Diagram

PART NO.	NO.OFPOS	DIM.A
XB-DSHU-01	1	2.87
XB-DSHU-02	2	4.14
XB-DSHU-03	3	5.41
XB-DSHU-04	4	6.68
XB-DSHU-05	5	7.95
XB-DSHU-06	6	9.22
XB-DSHU-07	7	10.49
XB-DSHU-08	8	11.76
XB-DSHU-09	9	13.03
XB-DSHU-10	10	14.3
XB-DSHU-12	12	16.84

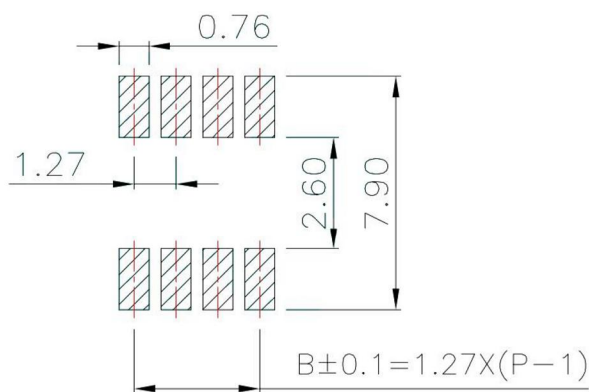

PCB Layout(Pattern Side)



SPECIFICATION

Contact Rating:	25mA,24V DC
Contact Resistance:	50mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	500V AC/1minute
Operating Force:	1000gf max
Travel:	2mm
Operating Life:	3000cycles
Operating Temp:	-20℃~+70℃
Storage Temp:	-30℃~+80℃

4	Terminal		Copper Alloy	T: Tin plated G: Plating Gold≥15MU
3	Base	1	Pa66	Black
2	Keystake	1	Pa66	white
1	Cover	1	Pa66	Black Blue Red
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE: DIP SWITCH
DWN		VIEW:	PART NO.: XB-DSHU-XX
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

DONG GUAN XI BANG ELECTRONIC CO., LTD

WEIGHT	SHEET	REVISI
	1/1	A0