

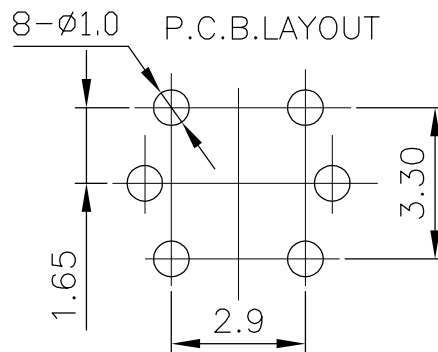


NOTES:

- 1.RATING: 12VDC 50mA
- 2.CONTACT RESISTANCE: 100m Ω Max
- 3.INSULATION RESISTANCE: 100M Ω 250VDC FOR 1MIN
- 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR1MIN
- 5.LIFE TEST:100,000 CYCLES
- 6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

6	LED	BRONZE PLATED SILVER
5	COVER	PC/PET
4	PUSH BUTTON	PA66
3	SPRING PLATE	PBS SILVER CLAD
2	CASE	PA66
1	TERMINAL	SILVER PLATED BRONZE
NO.	PART NAME	MATERIAL

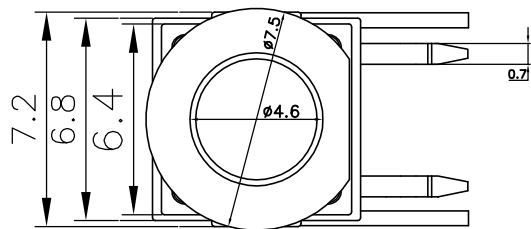

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

LED COLOR						
1	2	3	4	12	13	14
Red	Yellow	Green	Blue	Red Yellow	Red Green	Red Blue

TOLERANCE				PART NO.:	TITLE	TACT SWITCH	
UNLESS OTHERWISE STATED				带灯开关			
X.X	$\pm$ 0.25	$\angle$	$\pm$ 0.5'	DRAWN	DATE	MODEL	
X.XX	$\pm$ 0.1	UNIT	mm	29 29	2017.05.30	MATL	
REV	A	SCALE	4:1	CHK'D	DATE	FINISH	
SIZE	A4	SHEET	1 OF 1	Wang	2017.05.31		