

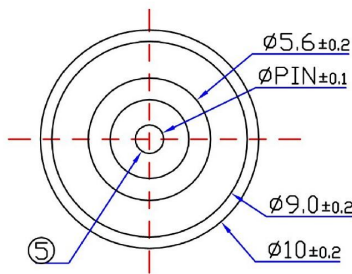





REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11

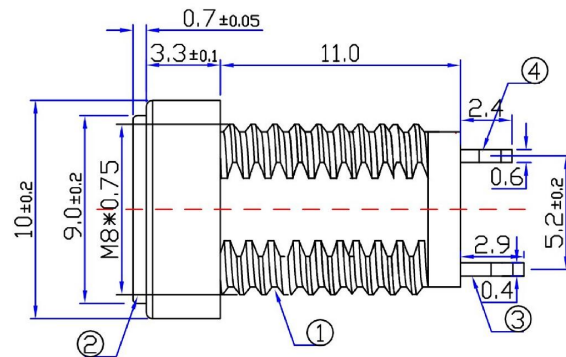


T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-sided view)



PIN	Ø2.0	Ø2.35	Ø2.5
APPD			

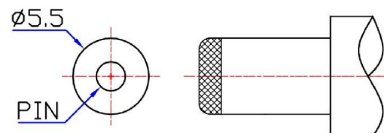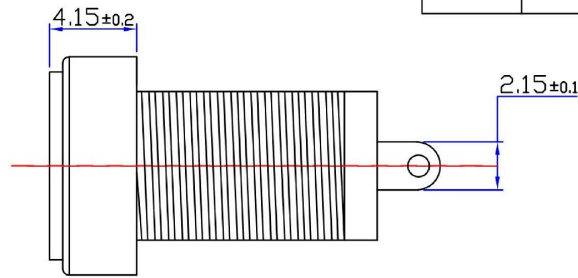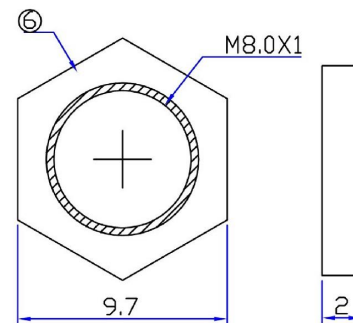

SCHEMATIC



技术要求

- 1、插入力: 3~30N(0.3~3.0kgf)
- 2、拔出力: 3~30N(0.3~3.0kgf)
- 3、接触电阻: ≤50mΩ
- 4、绝缘电阻: >100MΩ DC 500V
- 5、耐电压: AC 500V 1min无飞弧及击穿
- 6、寿命: 5000 10~20次/min
- 7、额定负载: DC 12V 5A
- 8、适用温度范围: -25~85° C
- 9、推荐使用插头:

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.50
X.x ±0.30
X.xx ±0.20
X.xxx ±0.10
ANGULAR ±3°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	DATE:	TITLE:
CHECKED:	DATE:	DC POWER JACK CONNECTOR
APPROVED:	DATE:	
PART NO. XB-DC-022BL	REV.: B	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	