

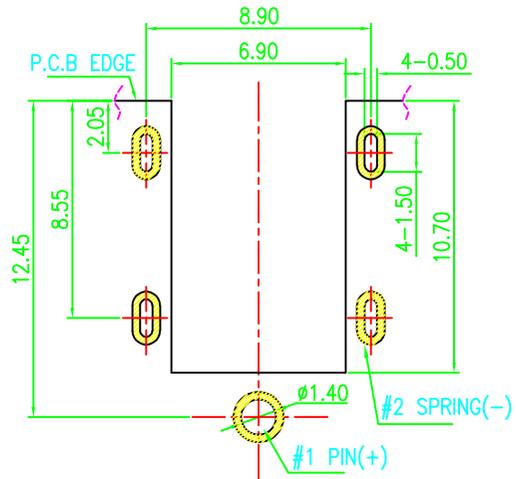


DC JACK INSERT DEPTH

3D VIEW

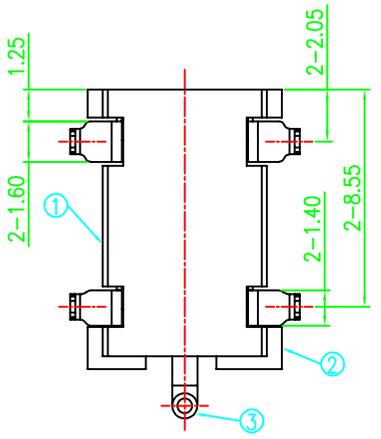

RECOMMENDED PCB LAYOUT  
TOP VIEW (TOLERANCE:±0.05)

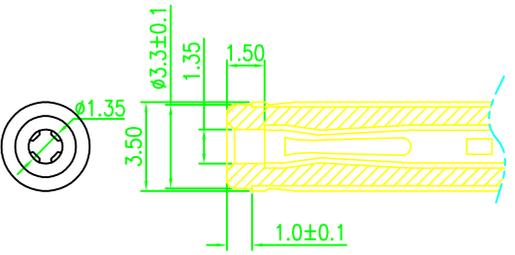

MATE PLUG



ELECTRICAL CIRCUIT

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - RATING: 24V 3A
  - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE : 0.3~3.0 KGF
  - WITHDRAWAL FORCE : 0.3~3.0 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.

③	CENTER PIN	1	BRASS Ø1.3	Au
②	TERMINAL	1	PHOSPHOR BRONZE 0.2t	Au
①	HOUSING	1	PPA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES


**XGB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Ø3.5 沉板式 DC POWER JACK
DIM	TOL	DIM	TOL	2018.7.12		
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-DC350135-0505-30000H
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	±1'			
X.XXX	±0.10	X.XXX	±1"	APPROVED	Andy-liu	SHEET: 1/1   REV.: A
3RD ANGLE PROJECTION				UNIT: mm	2018.7.12	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

1载带=1000PCS

1外箱=1000PCSX10盘载带=10000PCS

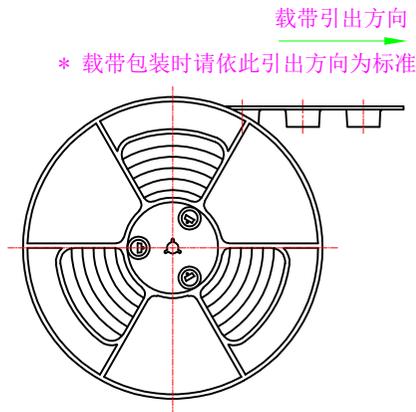


卷盘包装示意

包材名称	材料及厚度(mm)	规格(mm)
载带	P.S(白色透明)T=0.30	12500X24.00X4.90
载盘	HI P.S(蓝色)	φ330X24
自粘带	PET(白色透明)	W=21.30 T=0.06
PE-375X450X0.06-A	PE(白色透明)	770X750X0.035
三角板	A=A+	260X300
ZK-400X400X330-A	K=K	350X340X330

备注:

1. 每箱内必须放干燥剂;
2. 每箱内必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 我司标准格式标签或标签按客户要求制作;

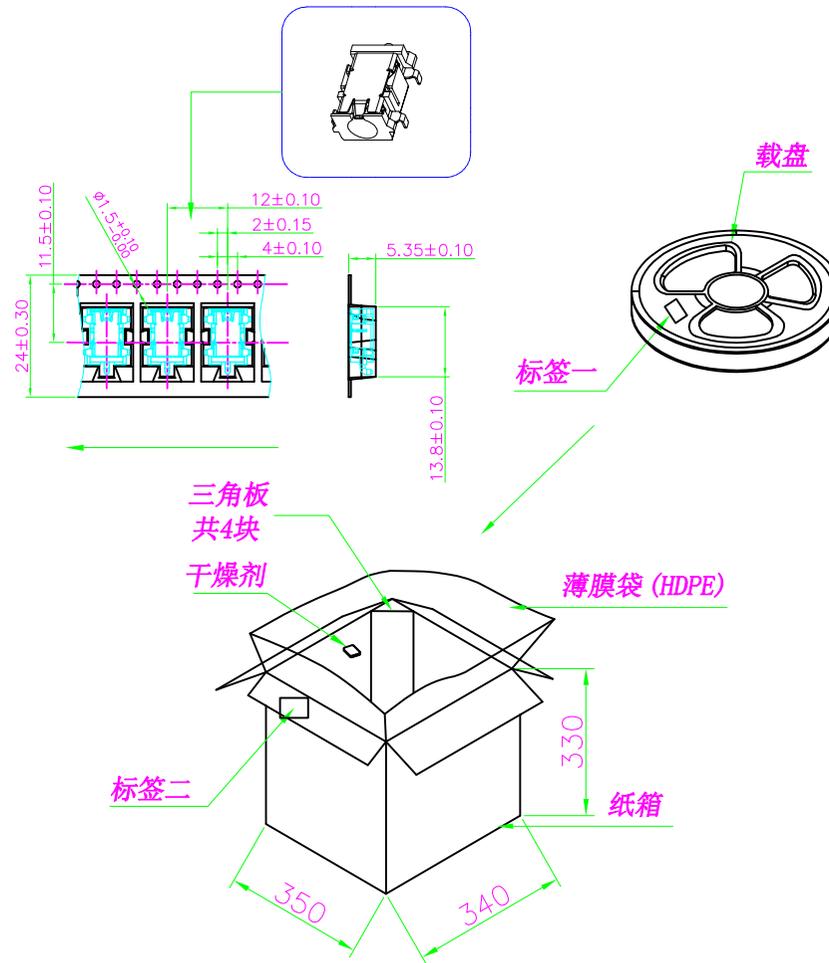

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8	7	6	5	4

UNLESS OTHERWISE SPECIFIED TOLERANCES		XBG 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:	ANGLES:	DESIGN:	Tony
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	±1°
X.XXX	±0.10	X.XXX	±1°
3RD ANGLE PROJECTION		UNIT:	mm
APPROVED		Andy-liu	2018.7.12
PART NAME:		2018.7.12	
Ø3.5 沉板式 DC POWER JACK 包装图		PART NO. XB-DC350135-0505-30000H	
SHEET: 1/1		REV.: A	
DRAWING NO			