

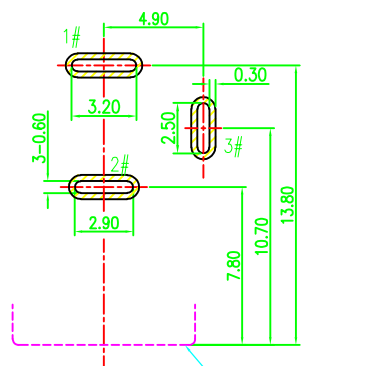
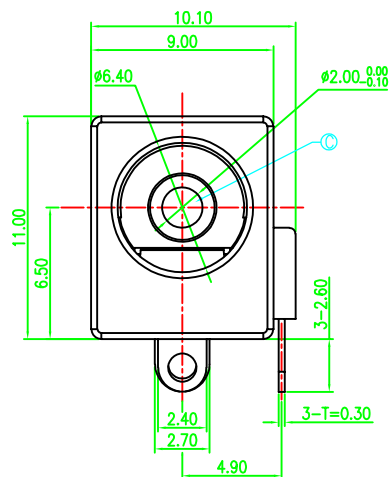
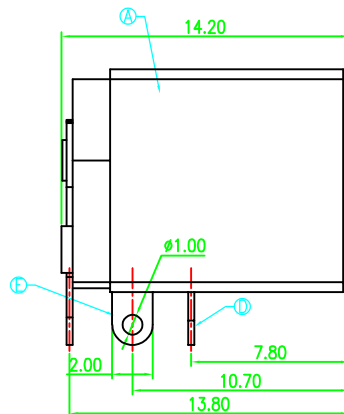
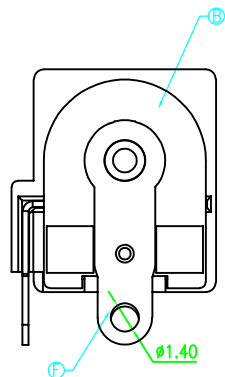


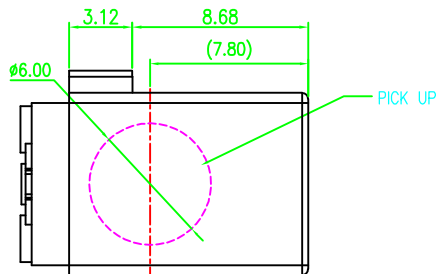



RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

PRODUCT EDGE





SPECIFICATION:

1. RATING: DC 50V 3A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES



SCHEMATIC

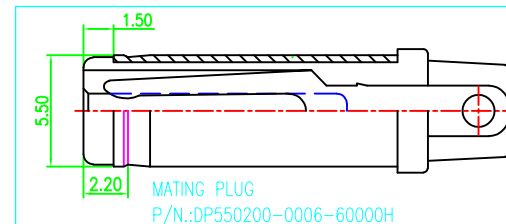

F	PLATE	BRASS	Ni 40u"~200u"	1
E	SHUNT	BRASS	Ni 40u"~200u"	1
D	SPRING	COPPER ALLOY	Au 1u" ON THE CONTACT AREA Ni 40u"~200u" UNDER PLATED OVERALL	1
C	CENTER PIN	BRASS	Au 1u"/Ni 40u"~200u"	1
B	COVER	PA10T	BLACK	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ5.5 H11.5卧式 DC POWER JACK
DIM	TOL	DIM	TOL	CHECK:	2022.6.21	
X.	±0.50	X.	±2°	APPROVED	Andy-liu	PART NO. XB-DC550200-1174-20000H
X.X	±0.30	X.X	±1°			SHEET: 1/1 REV.: A1
X.XX	±0.20	X.XX	±1'	3RD ANGLE PROJECTION	2022.6.21	DRAWING NO
X.XXX	±0.10	X.XXX	±1"			

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

汽泡垫 2PCS

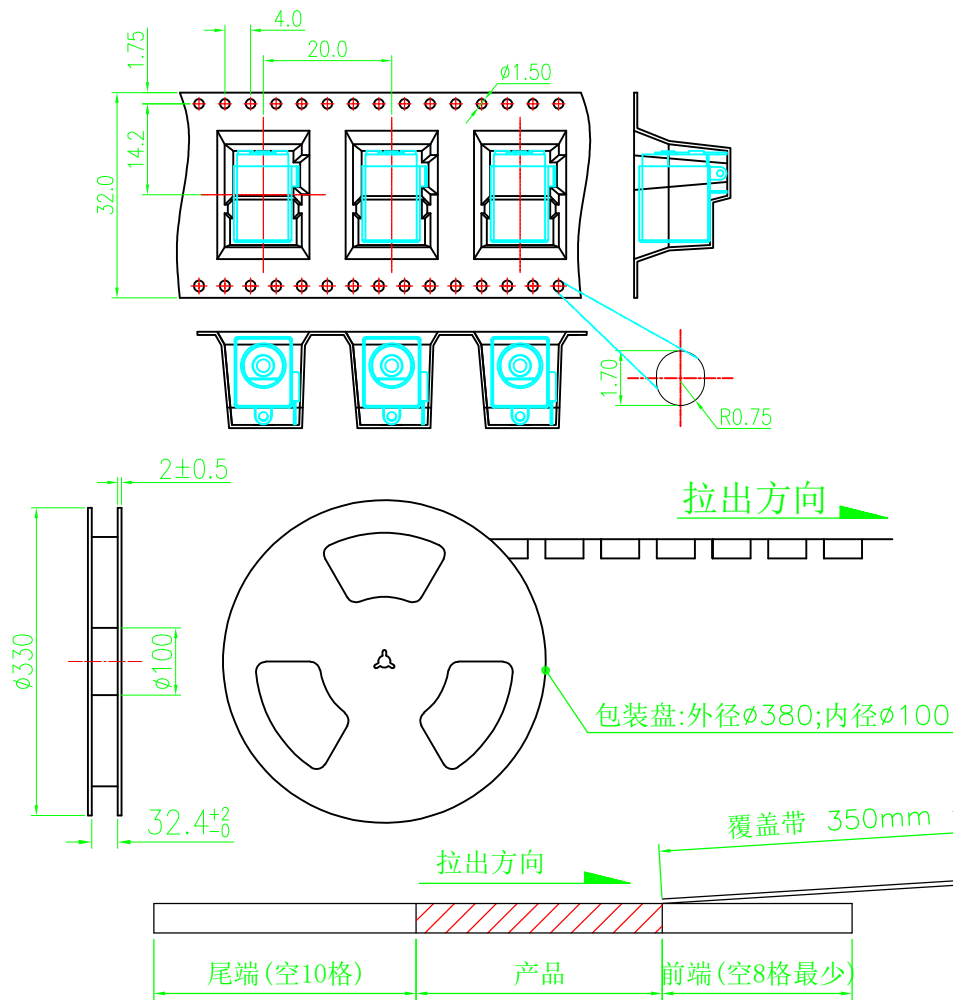

拉出方向

包装盘:外径 ϕ 380;内径 ϕ 100

覆盖带 350mm 最少.

尾端(空10格)

产品

前端(空8格最少)

备注:

- 材料规格:
 - 1.1 载带:透明
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=380
- 包装数量:
200PCS/卷, 10卷(2000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	/	X.	/
X.X	/	X.X	/
X.XX	/	X.XX	/
X.XXX	/	X.XXX	/
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony	PART NAME: Φ5.5 H11.5卧式 DC POWER JACK-包装图
CHECK:	2021.3.1	
APPROVED	Andy-Liu	PART NO. XB-DC550200-1174-20000H
	2021.3.1	SHEET: 1/1 REV.: A
		DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------