

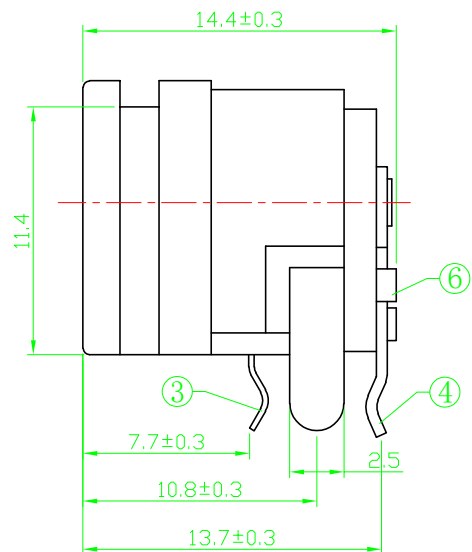
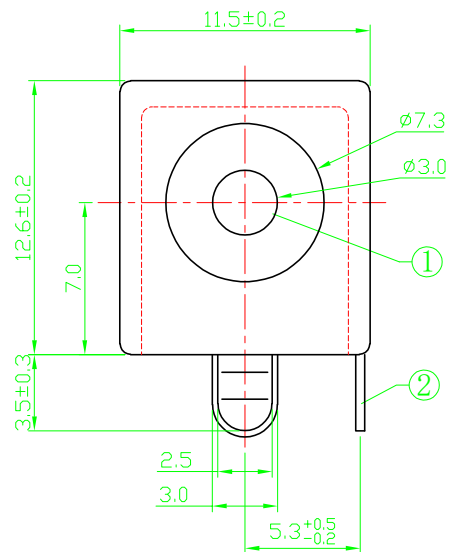
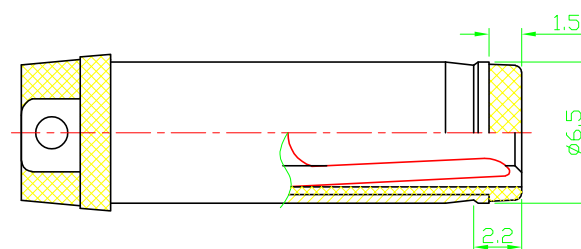


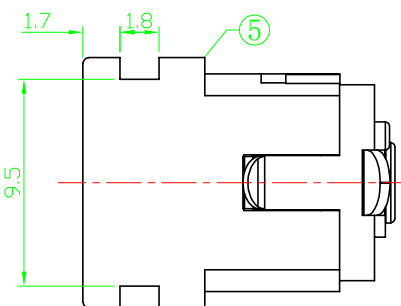

P. C. B LAYOUT
TOP VIEW

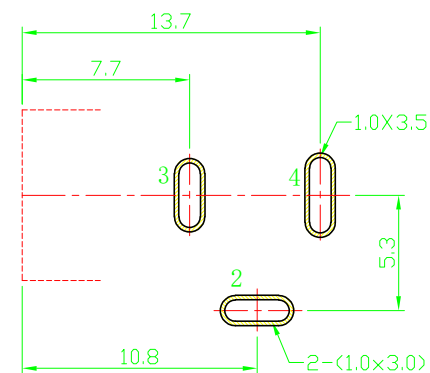

RECOMMENDED PLUG

6	COVER	1	PBT	
5	HOUSING	1	PBT	
4	FLAT PIECE	1	BRASS	Ag-Plating
3	SPRING	1	BRONZE	Ag-Plating
2	CURVE PIECE	1	BRASS	Ag-Plating
1	PIN	1	BRASS	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—


3RD ANGLE PROJECTION
UNIT: mm

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DESIGN:	Tony	PART NAME:	
	2021.8.11	6530 DC POWER JACK	
CHECK:		PART NO.	
		XB-DC650300-0890-20000H	
APPROVED	Andy	SHEET: 1/1	
	2021.8.11	REV.: A1	
DRAWING NO			

SPECIFICATION


1. Rating : DC 30V 6.0A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

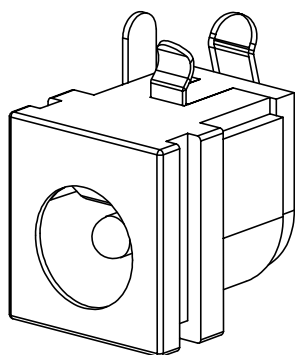


SCHEMATIC




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------




单重:2.62g



PE袋:500pcs/袋



小盒包装: 1袋/盒

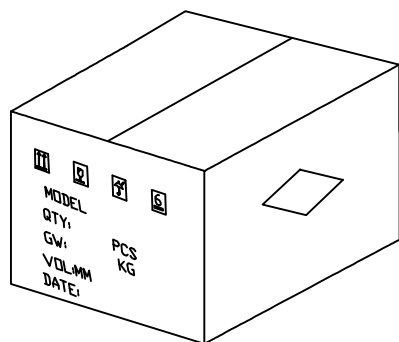


纸箱尺寸: 35*35*20 cm


数量: 5000 PCS

净重: 13.1 KG

毛重: 14.0 KG

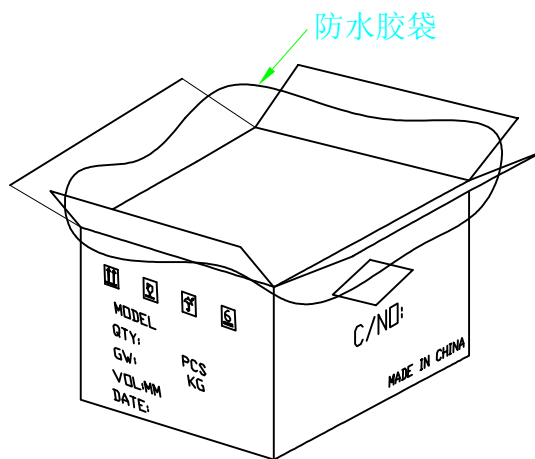

防水胶袋

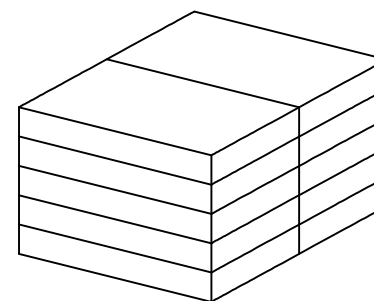

纸箱放入10个小盒, 2*5

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—



UNIT:
mm

DESIGN:	Tony
	2021.8.11
CHECK:	
APPROVED	Andy
	2021.8.11

PART NAME:	
6530 DC POWER JACK	
-包装图	
PART NO.	
XB-DC650300-0890-20000H	
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------