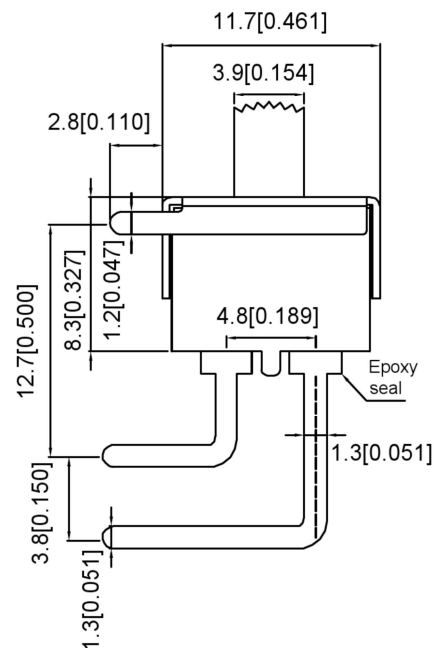
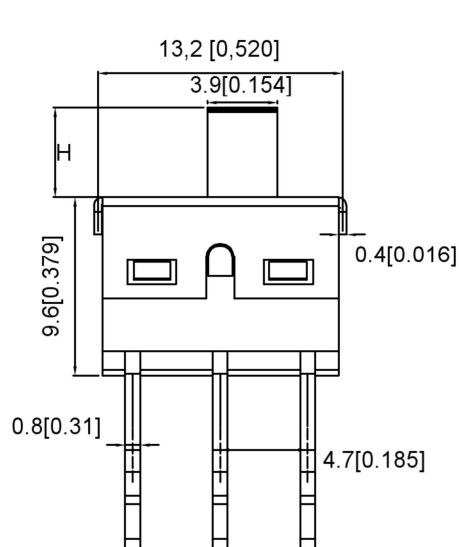



Circuit Diagram

MODEL CODE

SS-22D11 X X



Knob Type
L
G

H(mm)
2~12

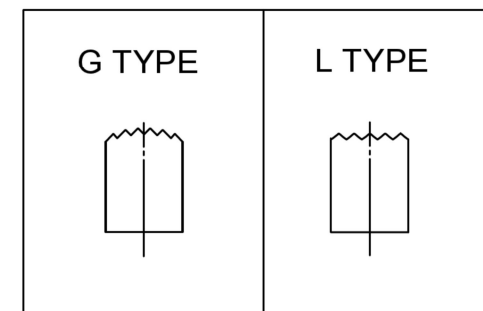

Typical Specifications

- 1.Rating:AC 125V 3A
- 2.Insulation Resistance:1,000M min
- 3.Dielectric strength:1,500V RMS
- 4.Operating Life: 10,000 cycles

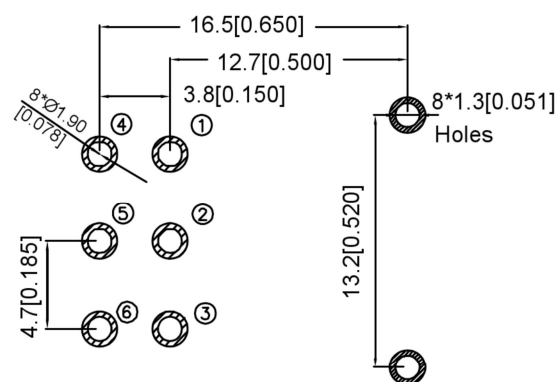

PCB Layout(pattern side)

PATR NO	vigor
1	300±100

⑤	Terminal	—	6	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	SLIDE SWITCH
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	SS-22D11XX
			DWG NO.:
			WEIGHT
			SHEET
			REVISI
			1/1
			A0

DONG GUAN XI BANG ELECTRONIC CO., LTD