



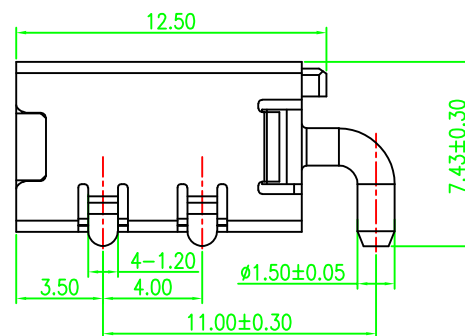

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



SCHEMATIC	
	1#(+)
	2#/3#/4#/5#(-)



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ5.5 卧式 DC POWER JACK	
DIM	TOL	DIM	TOL	CHECK:	2022.6.10		
X.	±0.50	X.	±2'				
X.X	±0.30	X.X	±1'				
X.XX	±0.20	X.XX	////	APPROVED	Andy 2022.6.10	PART NO. XB-DC550200-1155-20000H	
X.XXX	±0.10	X.XXX	////			SHEET: 1/1	REV.: A1
		UNIT: mm	DRAWING NO				

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------


拉出方向

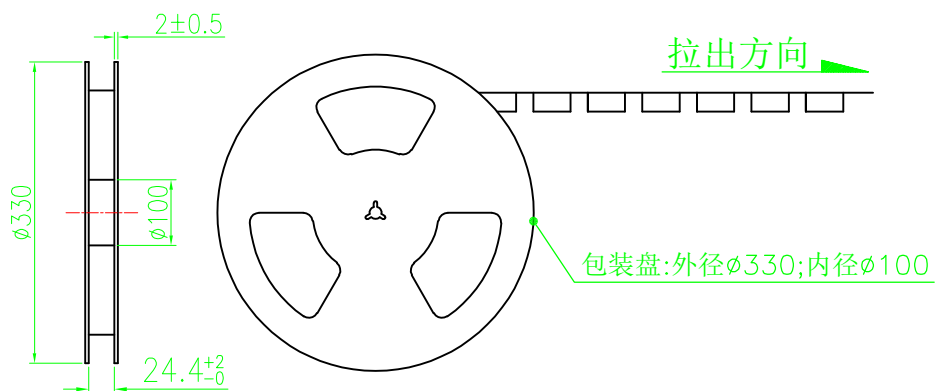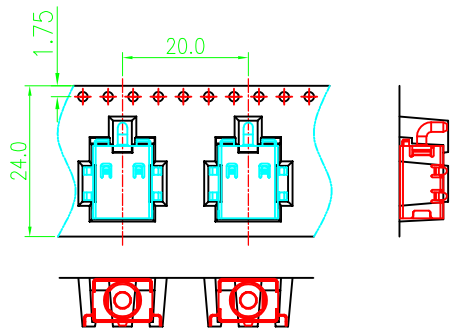

拉出方向

包装盘:外径 $\phi 330$;内径 $\phi 100$

拉出方向




备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟 .




包装盘标签


总共10层

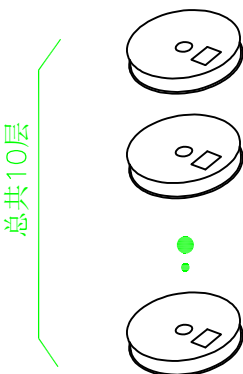


PE袋:



外箱, 1PCS

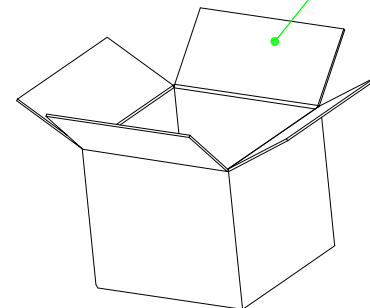

透明胶带

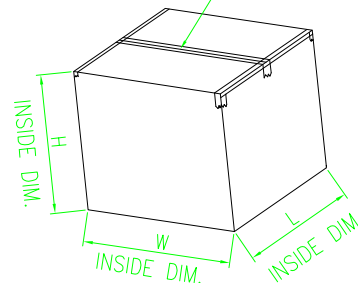

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:
DIM	TOL	DIM	TOL	CHECK:	2022.5.20	DC POWER JACK
X.	/	X.	/			-包装图
X.X	/	X.X	/			PART NO.
X.XX	/	X.XX	/			XB-DC550200-1155-20000H
X.XXX	/	X.XXX	/	APPROVED	Andy-Liu	SHEET: 1/1
3RD ANGLE PROJECTION		UNIT: mm		2022.5.20		REV.: A
						DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------