

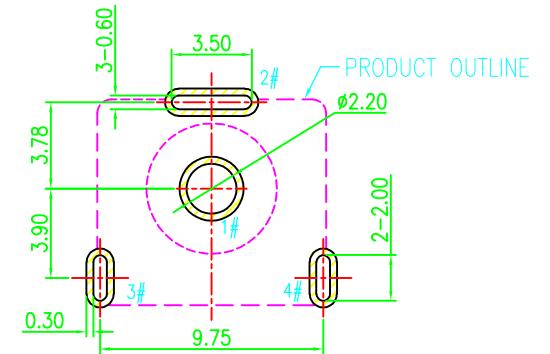
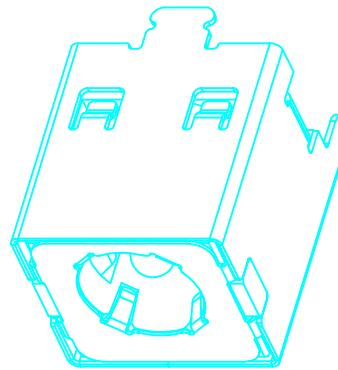
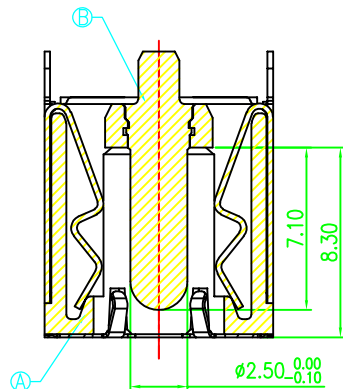
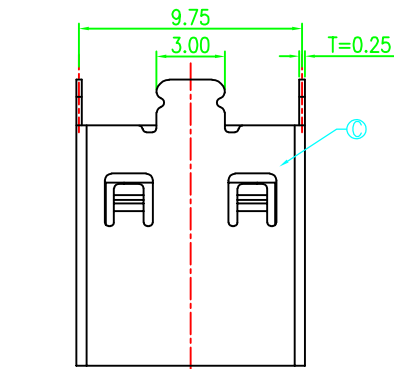
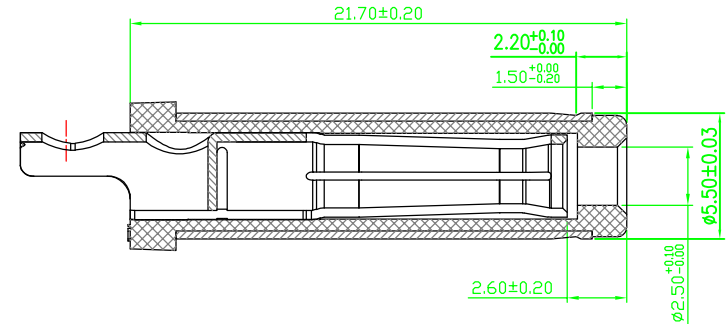


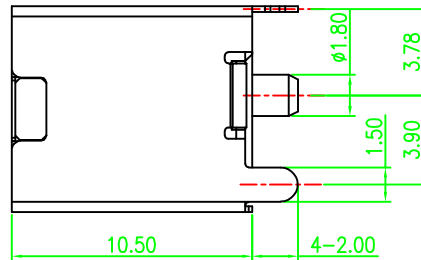

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

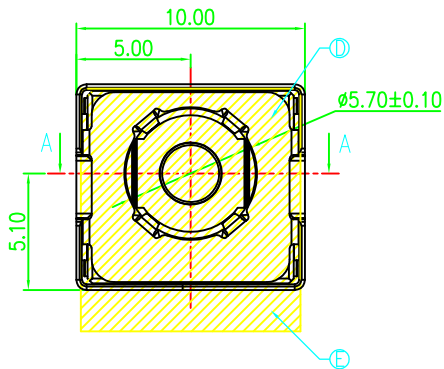

MATING PLUG
DP550250-0188-60000H

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

SCHEMATIC	
	1#(+)
	2#/3#4#(-)

E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY




UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2022.4.15	Φ 5.5 立式(H=10.5)	
X.	±0.50	X.	±2°		DC POWER JACK		
X.X	±0.30	X.X	±1°		PART NO.		
X.XX	±0.20	X.XX			XB-DC550250-1073-20000H		
X.XXX	±0.10	X.XXX		APPROVED	Andy	SHEET: 1/1 REV.: A1	
				UNIT: mm	2022.4.15	DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

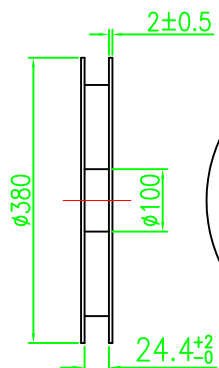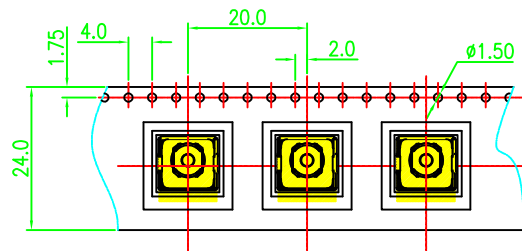

拉出方向

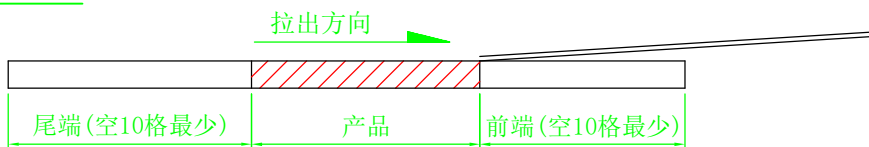


备注:

- 材料规格:
 - 1.1 载带:T=0.50mm
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=385,W=385,H=300
- 包装数量:
300PCS/卷, 10卷(3000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.




包装盘标签


总共10层

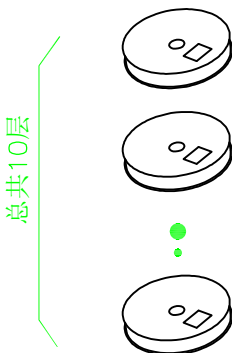


PE袋:



外箱,1PCS



透明胶带



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2023.2.25	DC POWER JACK	
X.	±0.50	X.	±2°		APPROVED	Andy-liu	包装图
X.X	±0.30	X.X	±1°				PART NO.
X.XX	±0.20	X.XX	——	XB-DC550250-1073-20000			
X.XXX	±0.10	X.XXX	——	SHEET: 1/1 REV.: A1			
		UNIT: mm		DRAWING NO			
3RD ANGLE PROJECTION							