

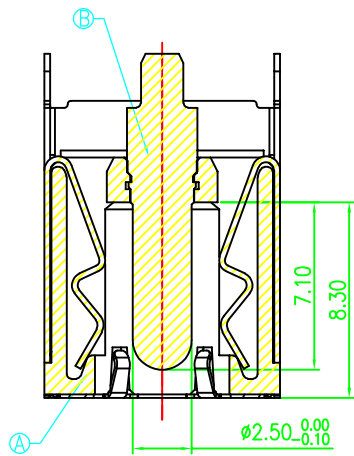
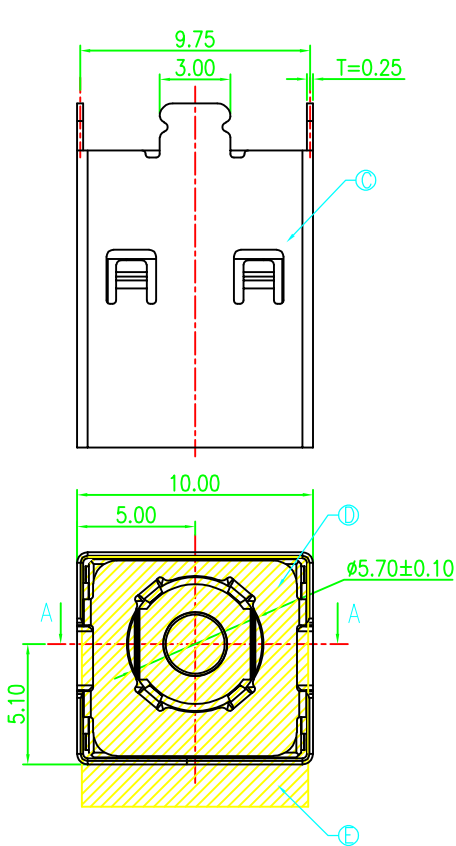
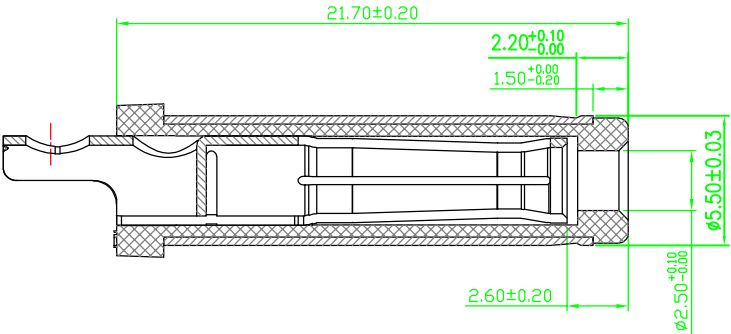
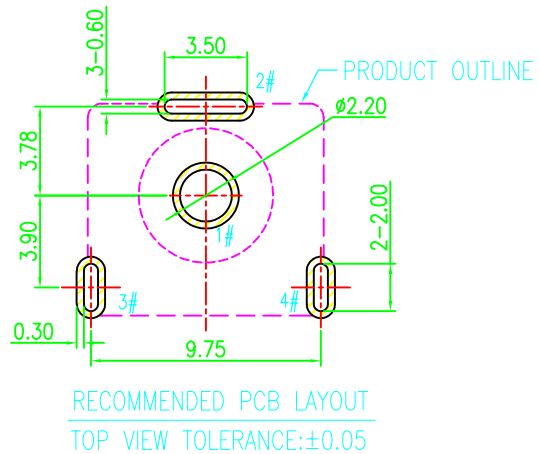


H=12.6MM

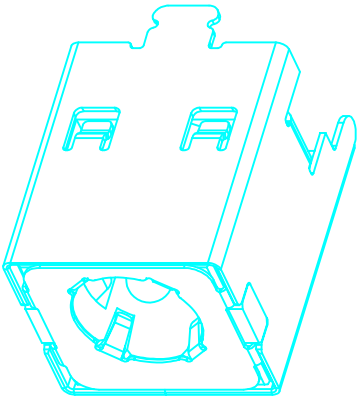


SECTION A-A

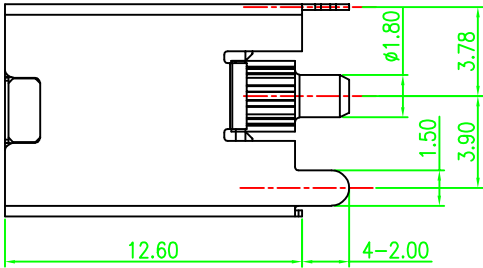

MATING PLUG
DP550250-0188-60000H

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM TOL	DIM TOL	CHECK:	2022.4.15	Φ5.5 立式(H=12.6) DC POWER JACK
X. ±0.50	X. ±2°	APPROVED	Andy	PART NO.
X.X ±0.30	X.X ±1°			XB-DC550250-1075-20000H
X.XX ±0.20	X.XX			SHEET: 1/1 REV.: A1
X.XXX ±0.10	X.XXX			DRAWING NO
3RD ANGLE PROJECTION	UNIT: mm		2022.4.15	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

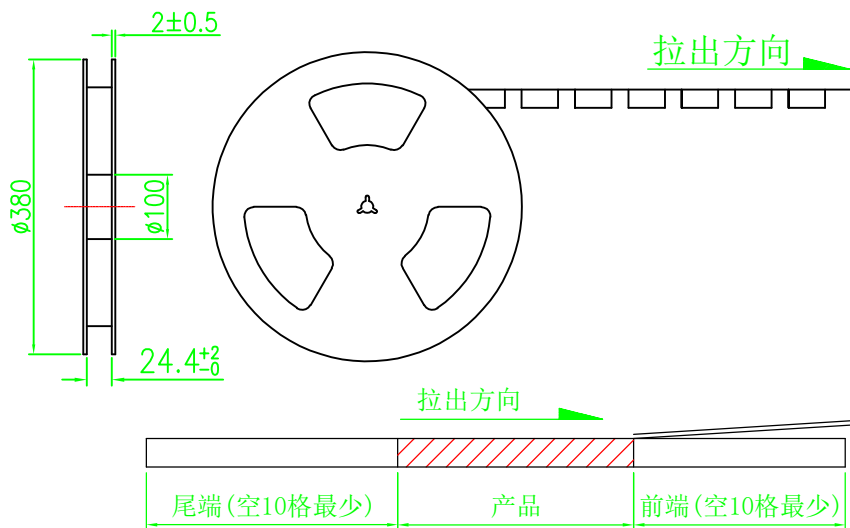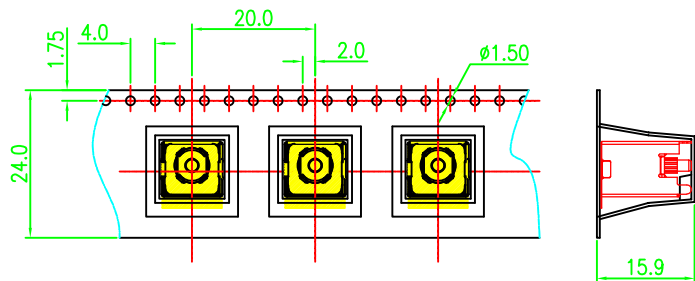

备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=300$
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: $0.1\text{N} \sim 0.7\text{N}$ ($10 \sim 70\text{gf}$);
拔离角度: $165^\circ \sim 180^\circ$;
拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	

3RD ANGLE PROJECTION

UNIT: mm

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN: Tony
2022.4.15
CHECK:
APPROVED: Andy-liu
2022.4.15

PART NAME:
DC POWER JACK
包装图
PART NO.
XB-DC550250-1075-20000H
SHEET: 1/1 REV.: A1
DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------