
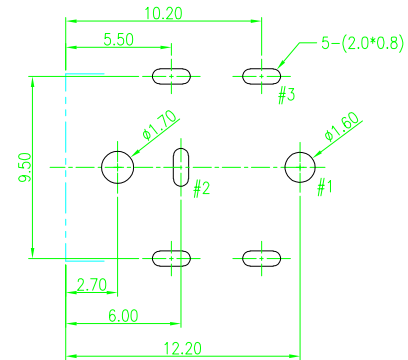

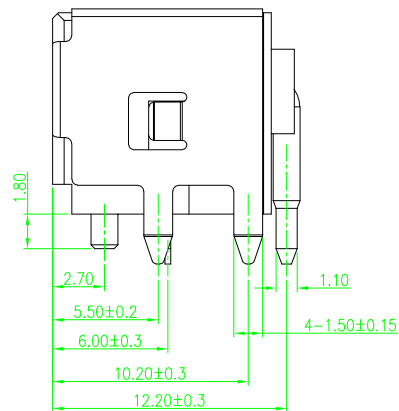
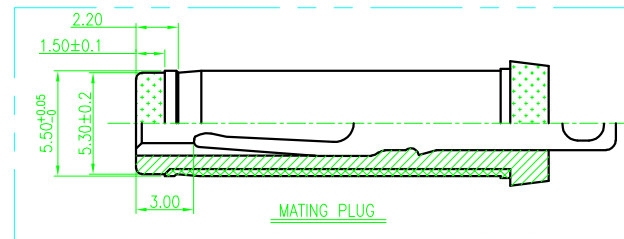

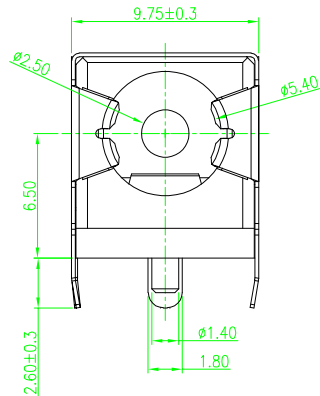


3D VIEW



PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

SPECIFICATIONS:


1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: DC 20V, 10A Min.
- 1-2. CONTACT RESISTANCE: 30 mΩ Max. (INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
- 1-4. INSULATION RESISTANCE: 100 MΩ Min.MEASURED BY 500V DC.

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 40 N Max.
- 2-2. WITHDRAWAL FORCE : 3 N Min.
- 3. LIFE TEST: 5000 CYCLES MIN.

⑥	TERMINAL	1	SUS301	N/A
⑤	SHELL	1	SUS301	Ni 50U"
④	CENTER PIN(+)	1	ZINC ALLOY	Ni 50U"
③	SHUNT TERMINAL	1	C2680R-EH	50u",φ10u"
②	TIP SPRING(-)	1	C5210R-EH	50u",φ10u"
①	HOUSING	1	PA9T UL 94V-0	Black




UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—
3RD ANGLE PROJECTION		UNIT: mm	


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME:	
	2022.8.11	DC JACK	
CHECK:		PART NO.	
		XB-DC550250-1213-20000H	
APPROVED	Andy	SHEET: 1/1	REV.: A1
	2022.8.11	DRAWING NO	




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

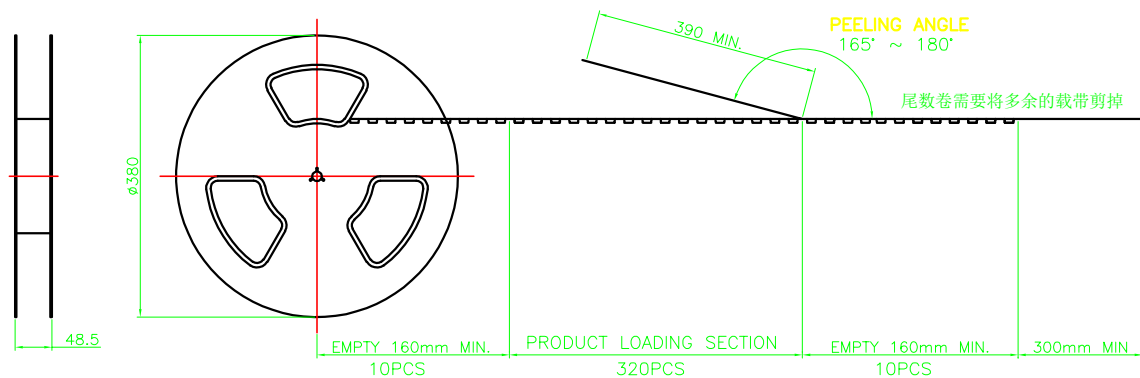

USER DIRECTION OF UNREELING →

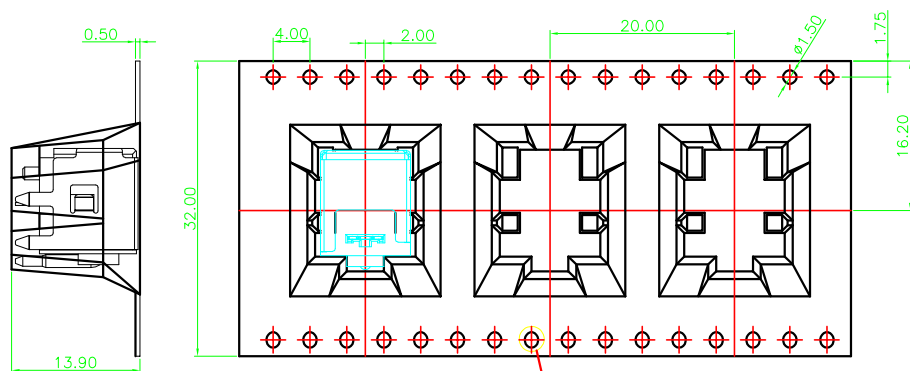

名称	规格	用量(PCS)
成品		3200
载带	透明	10
保护带		10
干燥剂		1
PE袋	880x755x0.03	1
外箱	420x410x400	1

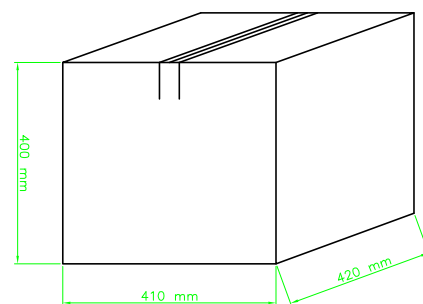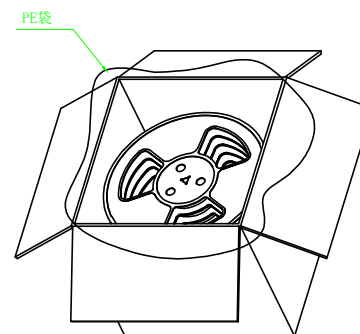

DETAIL D(2:1)

UNLESS OTHERWISE SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM TOL	DIM TOL	CHECK:	2022.8.11	DC JACK-???
X. ±0.50	X. ±2°			PART NO.
X.X ±0.30	X.X ±1°			DC550250-1213-20000H
X.XX ±0.20	X.XX			SHEET: 1/1 REV.: A1
X.XXX ±0.10	X.XXX			DRAWING NO
3RD ANGLE PROJECTION	UNIT: mm	APPROVED	Andy	
			2022.8.11	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------