


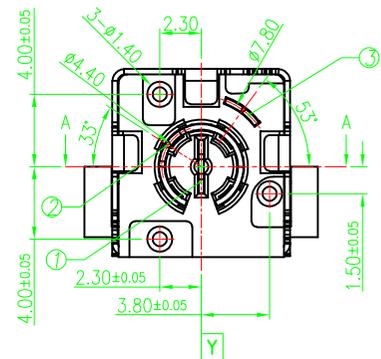
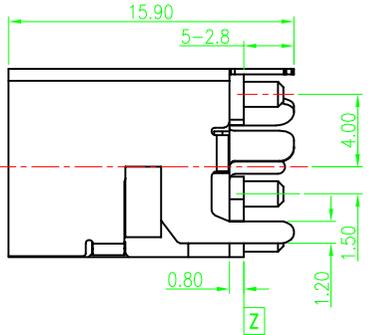
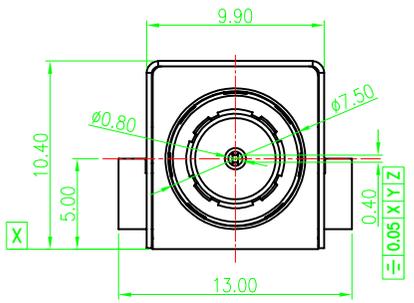
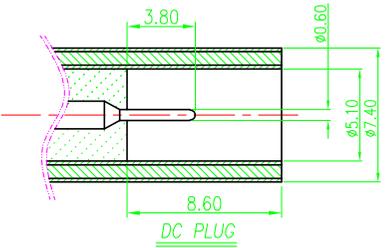


PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05

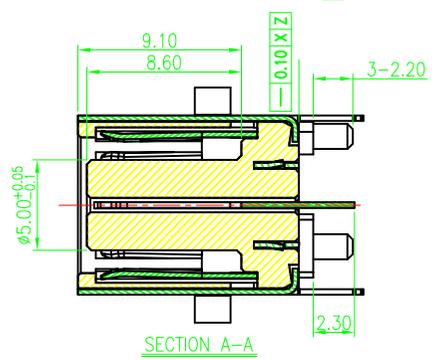

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 25V, 8A Min.
 - 1-2. CONTACT RESISTANCE: 50 MILLIOHMS Max. FOR INITIAL, 80 MILLIOHMS Max. AFTER 5000 CYCLES.
 - 1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min. BY 500V DC AFTER 1 MINUTE.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - LIFE TEST: 5,000 CYCLES MIN.

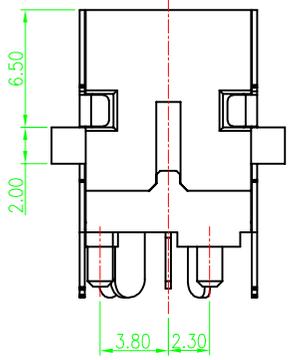

No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)
①	COVER	1	HIGH TEMP.THERMOPLASTIC	Black
②	HOUSING	1	HIGH TEMP.THERMOPLASTIC	Black
③	SHELL	1	COPPER ALLOY t=0.30	Ni-Plated
④	TERMINAL 3#	1	COPPER ALLOY t=0.30	Au-Plated
⑤	TERMINAL 2#	1	COPPER ALLOY t=0.30	Au-Plated
⑥	TERMINAL 1#	1	COPPER ALLOY t=0.30	Au-Plated

UNLESS OTHERWISE SPECIFIED TOLERANCES




XIB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME: DC JACK
DIM TOL	DIM TOL	CHECK:	2021.10.28	
X.X ±0.50	X ±2°	APPROVED:	Andy	PART NO.:
X.X ±0.30	X.X ±1°		2021.10.28	XB-DC740060-1055-20000H
X.XX ±0.20	X.XX			SHEET: 1/1
X.XXX ±0.10	X.XXX			REV.: A1




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8				
7				
6				
5				



UNIT: mm

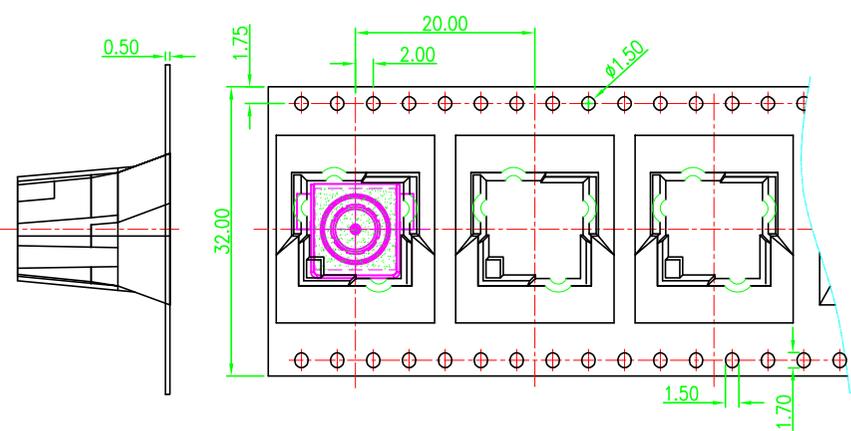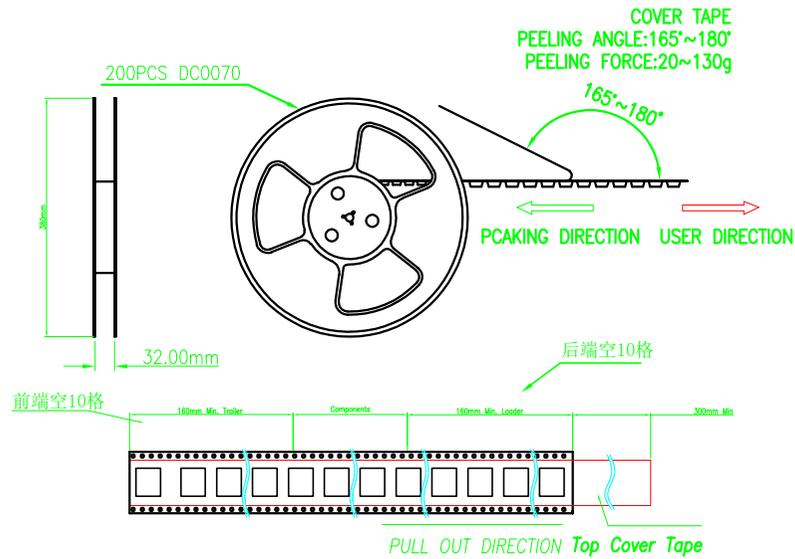

名称	规格	用量(PCS)
成品		1600
载带		8
保护带	透明	8
干燥剂		1
PE袋	660x640x0.03	1
三角柱	310x393	4
外箱	400x400x325	1

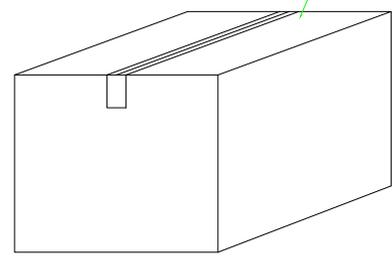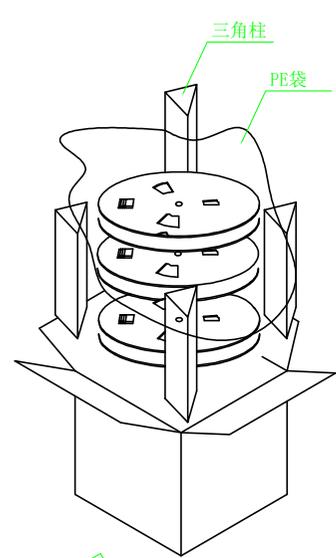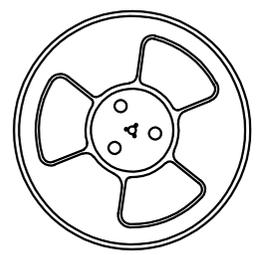

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8	7	6	5	

UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.X	±0.50	X	±2°
X.XX	±0.30	X.X	±1°
X.XXX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	2021.10.28	PART NAME: DC JACK -???
CHECK:			
APPROVED:	Andy	2021.10.28	
SHEET: 1/1			REV.: A1

F
E
D
C
B
A