

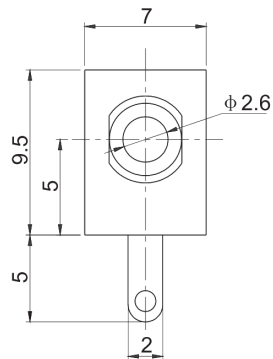


CAD FILE:

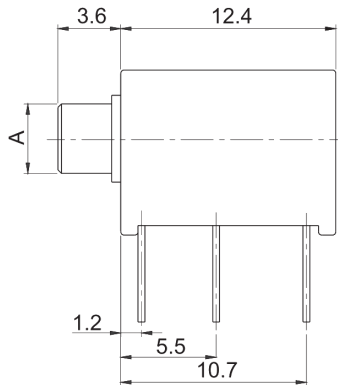

P.C.B Layout(copper-side view)

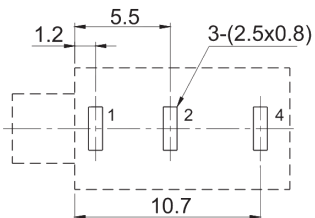

Model No.	A=φ4 A=M4xP0.5	PJ20130-C PJ2013M-C
Schematic		

主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage current	DC 30V 0.5A
接触电阻 Contact resistance	≤100mΩ
绝缘电阻 insulated resistance	≥100mΩ DC 500V
耐受电压 Withstand Voltage	AC 500V (50-60HZ)1min
电寿命 Electrical Life	5000 Cycles
使用温度 Service temperature	-25°C+ 80 °C
使用湿度 Ambient humidity used	≤85%RH
耐焊温度 Withstand Soldering temperature	260°C ± 5°C 5S ± 1S

8										
7										
6										
5										
4	CONTACT	SUS	1	Ag CLAD						
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED						
2	COVER	STEEL STRIP	1	Ni PLATED						
1	KNOB	PPA	1	BLACK						
NO.	PARTS	MATERIALS	Q'TY	FINISH						
					TOLERANCE UNLESS SPECIFIED					
					WITHIN 1.5mm : ±0.1mm					
					OVER 1.5mm : ±0.2mm					
					A			2023-6-21		
					ISSUE			DATE		
					初版			ZENQ. CHEN		
					DESCRIPTIONS OF REVISION			APPD.		
					TITLE : Audio iack			UNIT : mm		
					MODEL:			DRWG NO.: XB-PJ213M		
					SCALE: 5:1			DWN. JUN. YANG 2023-6-21		
					东莞市溪榜电子有限公司			CHK'D DONG. PANG 2023-6-21		
					DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD. ZENQ. CHEN 2023-6-21		



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.