


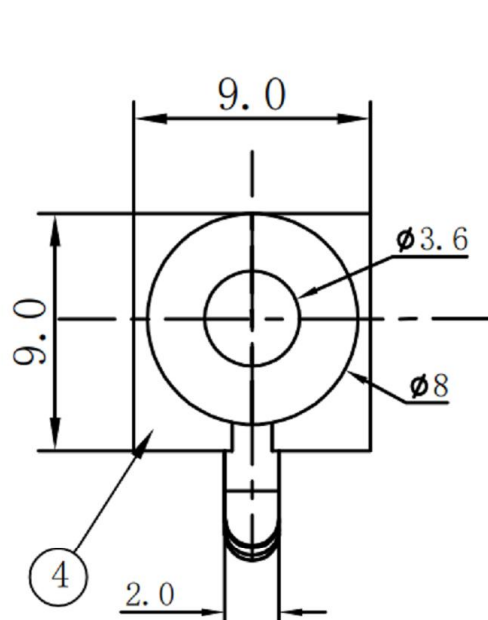


CAD FILE:

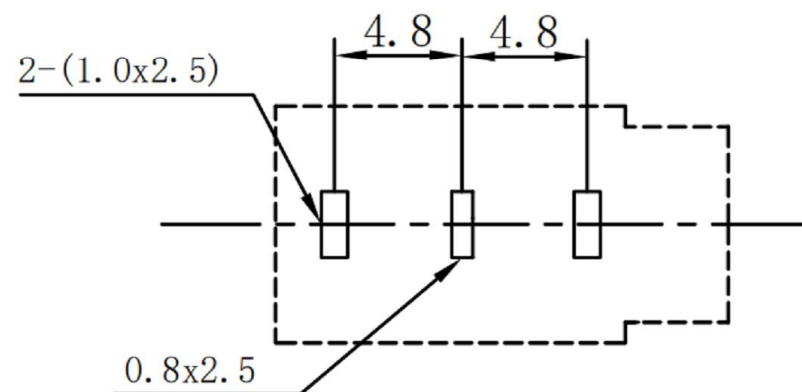

SCHEMATIC

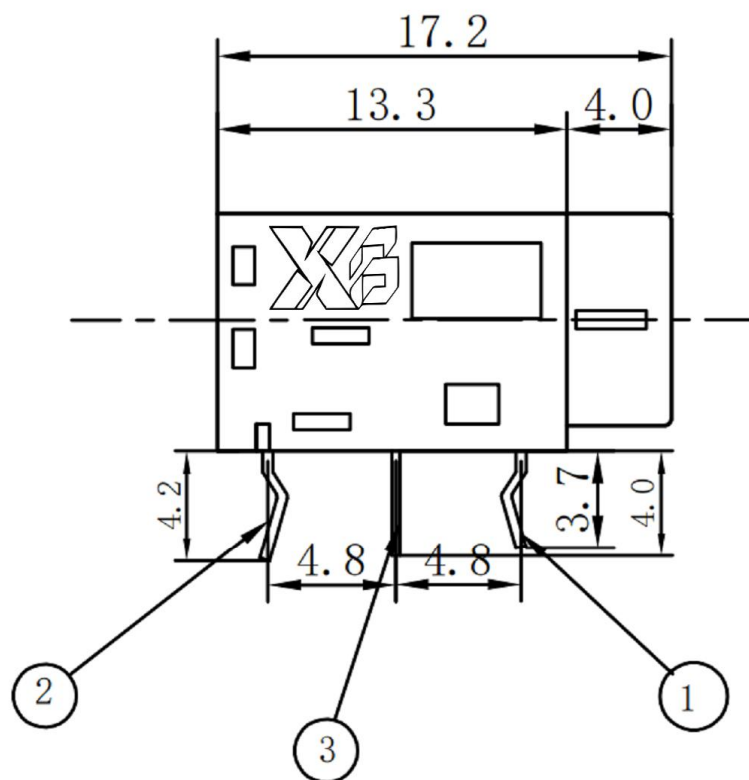

线路板安装尺寸

技术要求

使用条件: $-16 \sim 65^{\circ}\text{C}$

额定负荷: DC 30V 0.5A

接触电阻: $\leq 0.03\Omega$ 绝缘电阻: $\geq 100\text{M}\Omega$ DC250V

耐压: AC 500V(50Hz)/min

插拔力: 3~20N

机械寿命: 5000次

8					TOLERANCE UNLESS SPECIFIED						
7											
6						WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN
5						OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Audio Jack			UNIT : mm	DRWG NO.: XB-PJ-3016S		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PJ-3016S			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D		DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.		ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH							