


|      |         |             |        |            |
|------|---------|-------------|--------|------------|
| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
| A    |         | INITIAL     | Kai    | 2018.06.14 |

线路板安装尺寸示意图

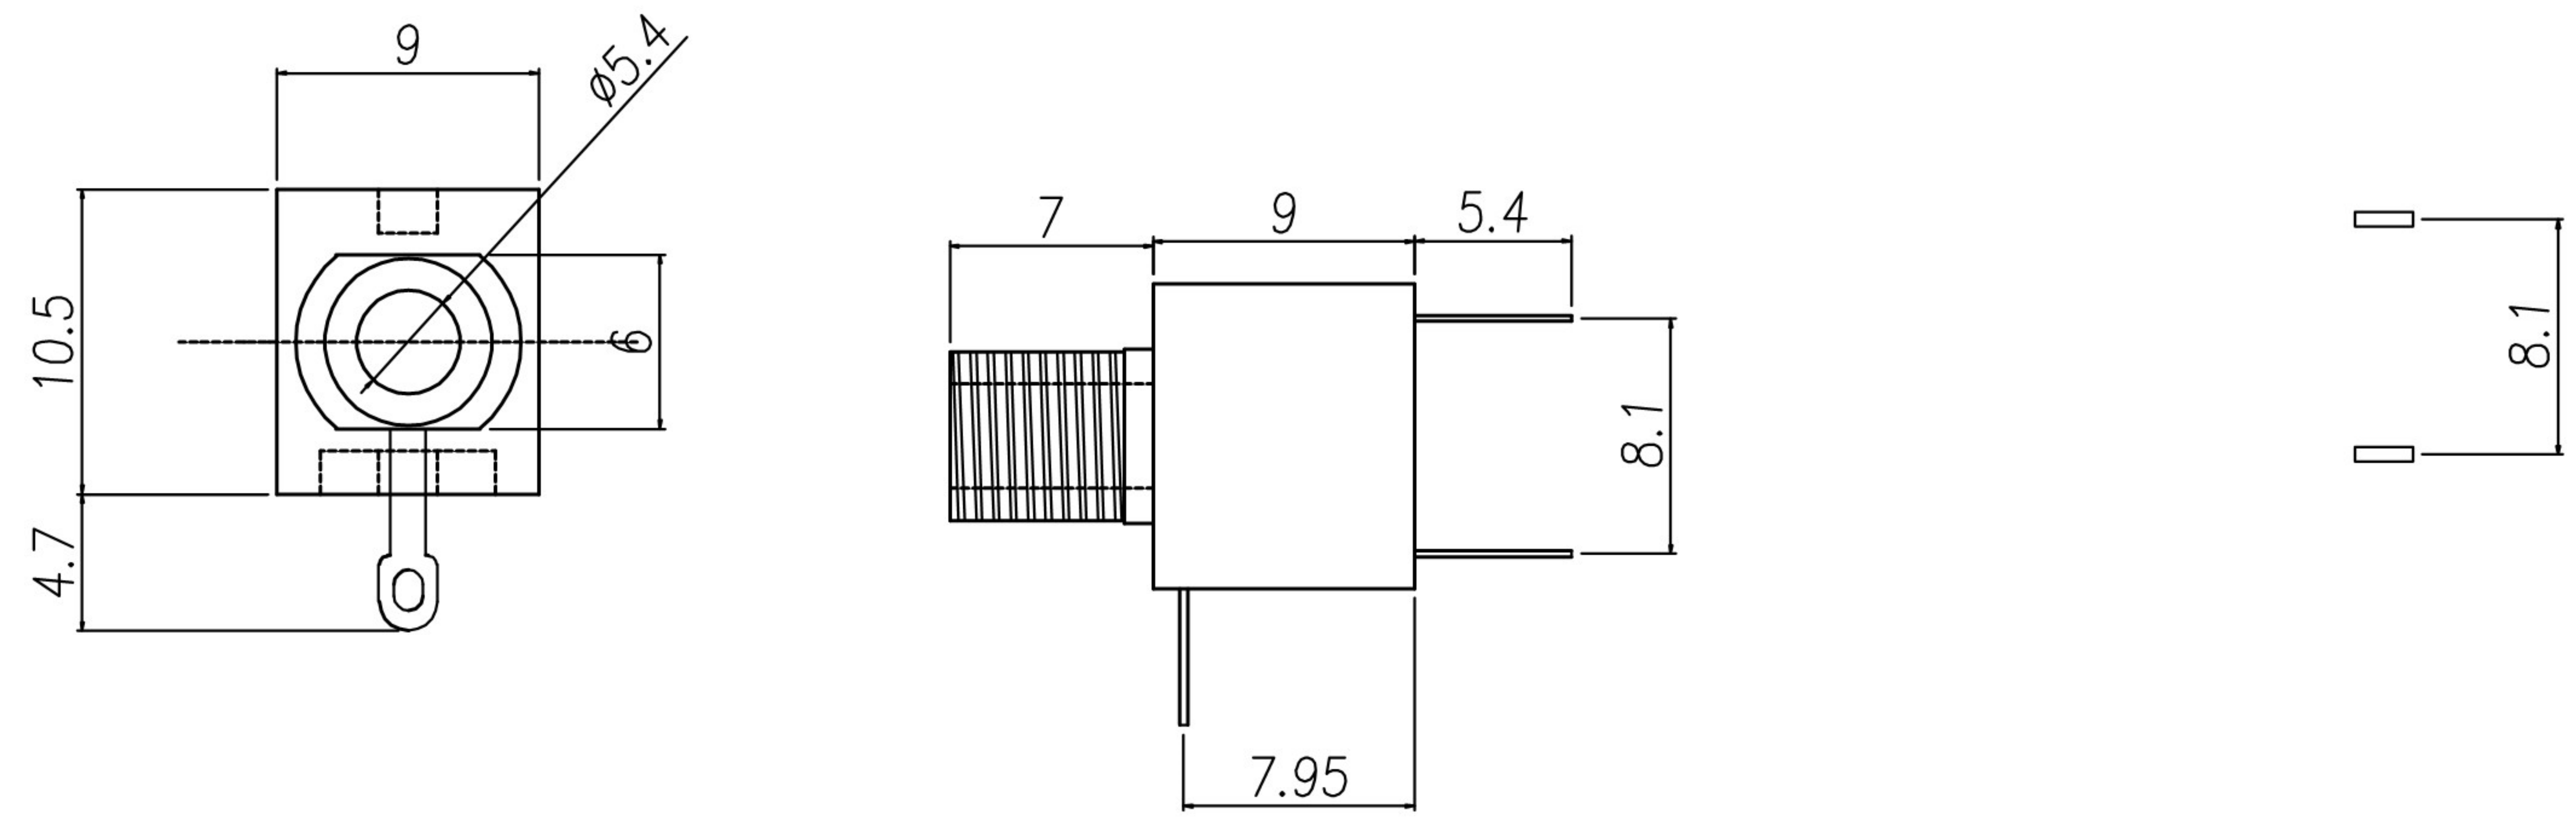

|                                     |             |             |
|-------------------------------------|-------------|-------------|
| TOLERANCE: UNLESS OTHERWISE SPECIED |             |             |
| UNOER 1.5±0.05                      | 1.5 ~10±0.1 | OVER 10±0.2 |

技术要求

使用条件: -40 ~ 55℃  
额定负荷: DC 30V 0.5V  
绝缘电阻:  $\leq 0.03\Omega$   
绝缘电阻:  $\geq 100M\Omega$  DC250V  
耐 压: AC 55V(50HZ)/min  
插 拔 力: 3~20N  
机械寿命: 5000次

|  |  |  |  |  |  |  |        |                   |                                       |  |                                                        |  |            |                 |
|--|--|--|--|--|--|--|--------|-------------------|---------------------------------------|--|--------------------------------------------------------|--|------------|-----------------|
|  |  |  |  |  |  |  | 主要技术性能 |                   | UNLESS OTHERWISE SPECIFIED TOLERANCES |  | 东莞市溪榜电子有限公司<br>DONG GUAN XI BANG ELECTRONICS CO., LTD. |  |            |                 |
|  |  |  |  |  |  |  | 额定电负荷  | DC 30V\0.5A       | DECIMALS:                             |  | ANGLES:                                                |  | DWG NO.    | Q/XM-CP-RD-XXXX |
|  |  |  |  |  |  |  | 接触电阻   | $\leq 0.03\Omega$ | DIM                                   |  | DIM                                                    |  | DESIGN:    | Kai             |
|  |  |  |  |  |  |  | 绝缘电阻   | $\geq 100M\Omega$ | TOL                                   |  | TOL                                                    |  | 2018.06.14 | PART NAME:      |
|  |  |  |  |  |  |  | 耐 压    | AC500V(50Hz)/min  | X.                                    |  | X.                                                     |  | 2018.06.14 | PHONE JACK      |
|  |  |  |  |  |  |  | 插 拔 力  | 3-20N             | X.X                                   |  | X.X                                                    |  | 2018.06.14 | PART NO.        |
|  |  |  |  |  |  |  | 使用温度范围 | -30~70℃           | X.XX                                  |  | X.XX                                                   |  | 2018.06.14 | PJ-301M-X       |
|  |  |  |  |  |  |  | 使用寿命   | 5000次             | X.XXX                                 |  | X.XXX                                                  |  | 2018.06.14 | REV.            |
|  |  |  |  |  |  |  |        |                   |                                       |  |                                                        |  | 2018.06.14 | UNIT:           |
|  |  |  |  |  |  |  |        |                   |                                       |  |                                                        |  | 2018.06.14 | mm              |
|  |  |  |  |  |  |  |        |                   |                                       |  |                                                        |  | 2018.06.14 | SHEET:          |
|  |  |  |  |  |  |  |        |                   |                                       |  |                                                        |  | 2018.06.14 | 1/1             |
|  |  |  |  |  |  |  |        |                   |                                       |  |                                                        |  | 2018.06.14 |                 |