

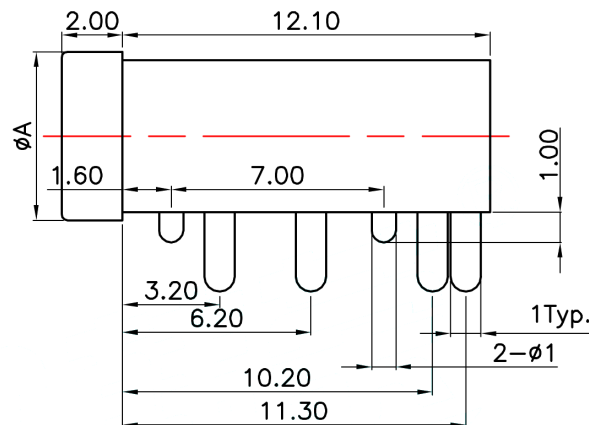


CAD FILE:



P.C.B LAYOUT(copper-sided view)

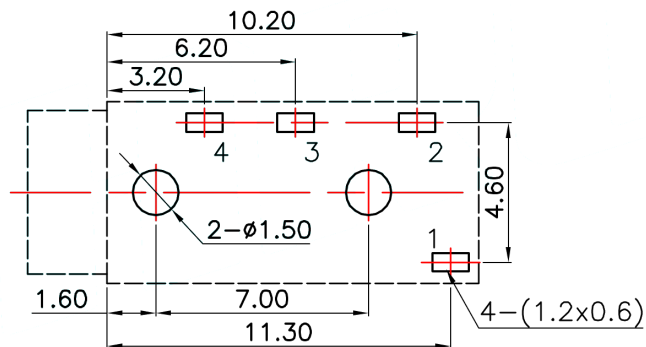

|             |   |   |
|-------------|---|---|
| L=3.0 A=5.6 | 1 | 2 |
| L=3.0 A=5.0 | 3 | 4 |
| L=1.8 A=5.6 | 5 | 6 |
| Schematic   |   |   |

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3-20N  
Operating Life:5,000cycles

|     |         |                 |      |                 |                                                                                                                                             |       |           |                          |                          |
|-----|---------|-----------------|------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|--------------------------|--------------------------|
| 8   |         |                 |      |                 | TOLERANCE                                                                                                                                   |       |           |                          |                          |
| 7   |         |                 |      |                 | UNLESS SPECIFIED                                                                                                                            |       |           |                          |                          |
| 6   |         |                 |      |                 | WITHIN 1.5mm : ±0.1mm                                                                                                                       | A     | 2012-9-25 | 初 版                      | ZENQ. CHEN               |
| 5   |         |                 |      |                 | OVER 1.5mm : ±0.2mm                                                                                                                         | ISSUE | DATE      | DESCRIPTIONS OF REVISION | APPD.                    |
| 4   | CONTACT | SUS             | 1    | Ag CLAD         | TITLE : DC Power Jack                                                                                                                       |       |           | UNIT : mm                | DRWG NO.:                |
| 3   | CASE    | PPA/BRASS SRTIP | 1    | BLACK/Ag PLATED | MODEL:                                                                                                                                      |       |           | SCALE: 5:1               | DWN. JUN. YANG 2012-9-25 |
| 2   | COVER   | STEEL STRIP     | 1    | Ni PLATED       |  东莞市溪榜电子有限公司<br>DONG GUAN XI BANG ELECTRONICS CO., LTD. |       |           | CHK'D DONG. PANG         | 2012-9-25                |
| 1   | KNOB    | PPA             | 1    | BLACK           |                                                                                                                                             |       |           | APPD. ZENQ. CHEN         | 2012-9-25                |
| NO. | PARTS   | MATERIALS       | Q'TY | FINISH          |                                                                                                                                             |       |           |                          |                          |