

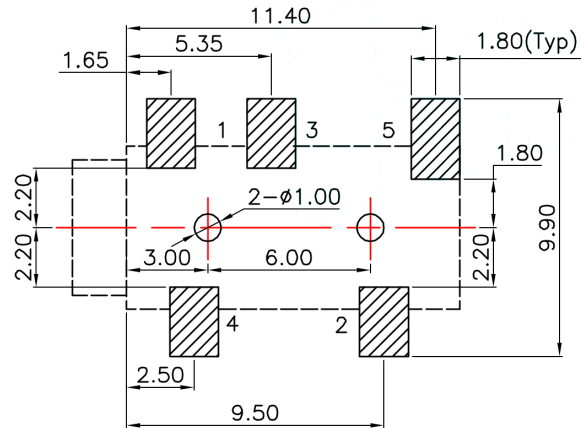


CAD FILE:

P.C.B Layout (copper-sided view)

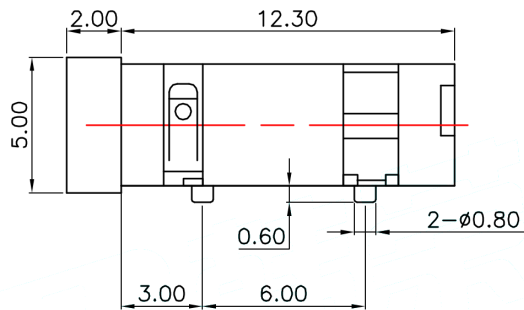

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model NO	PJ-327E-A	PJ-327E-B
Schematic		
Model NO	PJ-327E-C	PJ-327E-D
Schematic		

8											
7											
6											
5											
4	CONTACT	SUS	1	Ag CLAD							
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED							
2	COVER	STEEL STRIP	1	Ni PLATED							
1	KNOB	PPA	1	BLACK							
NO.	PARTS	MATERIALS	Q'TY	FINISH							
					TOLERANCE UNLESS SPECIFIED						
					WITHIN 1.5mm : ±0.1mm		A	2012-9-25	初版		
					OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION		
					TITLE : Audio Jack			UNIT : mm	DRWG NO.:XB-PJ-327E		
					MODEL:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
					东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
								APPD.	ZENQ. CHEN	2012-9-25	