

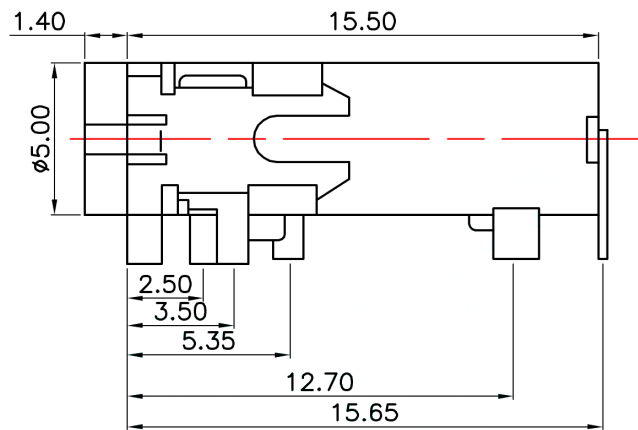


CAD FILE:

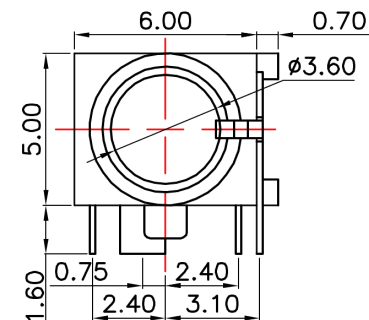

P.C.B LAYOUT(copper-sided view)

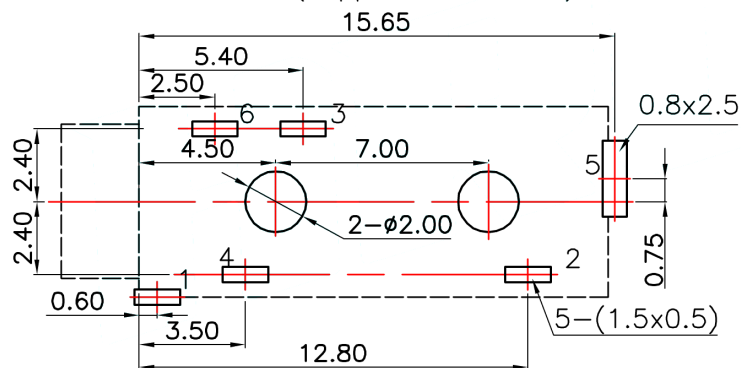

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

Model No.	PJ-3280C-A	PJ-3280C-B	PJ-3280C-C
Schematic			

Model No.	PJ-3280C-D	PJ-3280C-E	PJ-3280C-F
Schematic			

8									
7									
6					TOLERANCE UNLESS SPECIFIED				
5					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
4	CONTACT	SUS	1	Ag CLAD	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	TITLE : Audio Jack			UNIT : mm	DRWG NO.:XB-PJ-3280C-SMT
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
1	KNOB	PPA	1	BLACK	DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D DONG. PANG 2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH	APPD. ZENQ. CHEN 2012-9-25				