


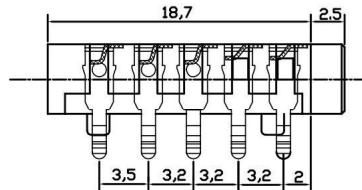
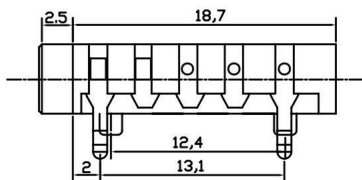

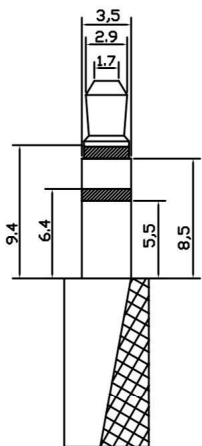



ROHS




P. C. B. LAYOUT TOP VIEW

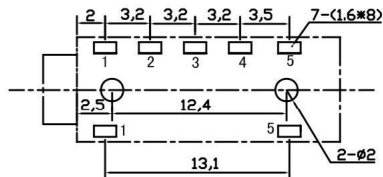

3节插头

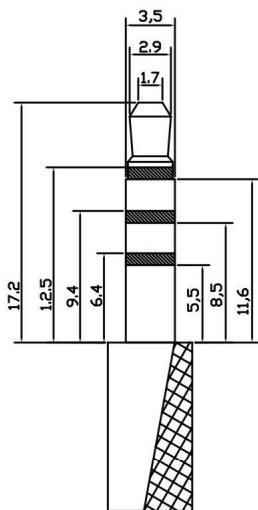



4节插头

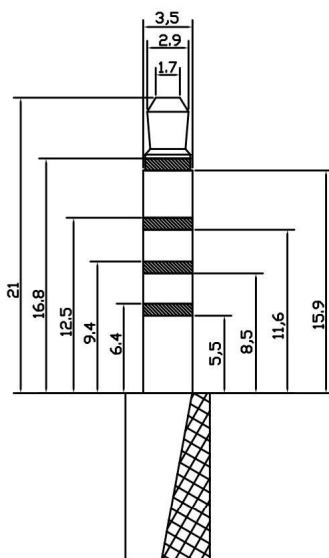

5节插头

- ## 技术要求

- 1、插入力: 2.94~29.4N(0.3~3.0kgf)
- 2、拔出力: 2.94~29.4N(0.3~3.0kgf)
- 3、接触电阻: $\leq 30\text{m}\Omega$
- 4、绝缘电阻: $>100\text{M}\Omega$ DC 500V
- 5、耐电压: AC 500V 1min无飞弧及击穿
- 6、寿命: 5000 10~20次/min
- 7、额定负载: DC 12V 1A
- 8、适用温度范围: $-25\sim 85^{\circ}\text{C}$
- 9、推荐使用插头:

SCHEMATIC	XB-PJ-30515-1	XB-PJ-30515-2	XB-PJ-30515-3
			

序号	零件料号	名称	材料	数量	镀层/颜色	备注
1		1号脚	磷铜=0.25	1PCS	银	
2		2号脚	磷铜=0.25	1PCS	银	
3		3号脚	皮青铜=0.25	1PCS	银	
4		4号脚	皮青铜=0.25	1PCS	银	
5		5号脚	磷铜=0.25	1PCS	银	
6		塑料座	PPA	1PCS	黑色	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

审核		日期	2011. 2. 16	品名	3 5 PHONE JACKS		
批准		日期	2011. 2. 16	型号	XB-PJ-30515		
比例		单位	工程部	页码	1F1	A4	

变更号	版本	日期
-----	----	----