

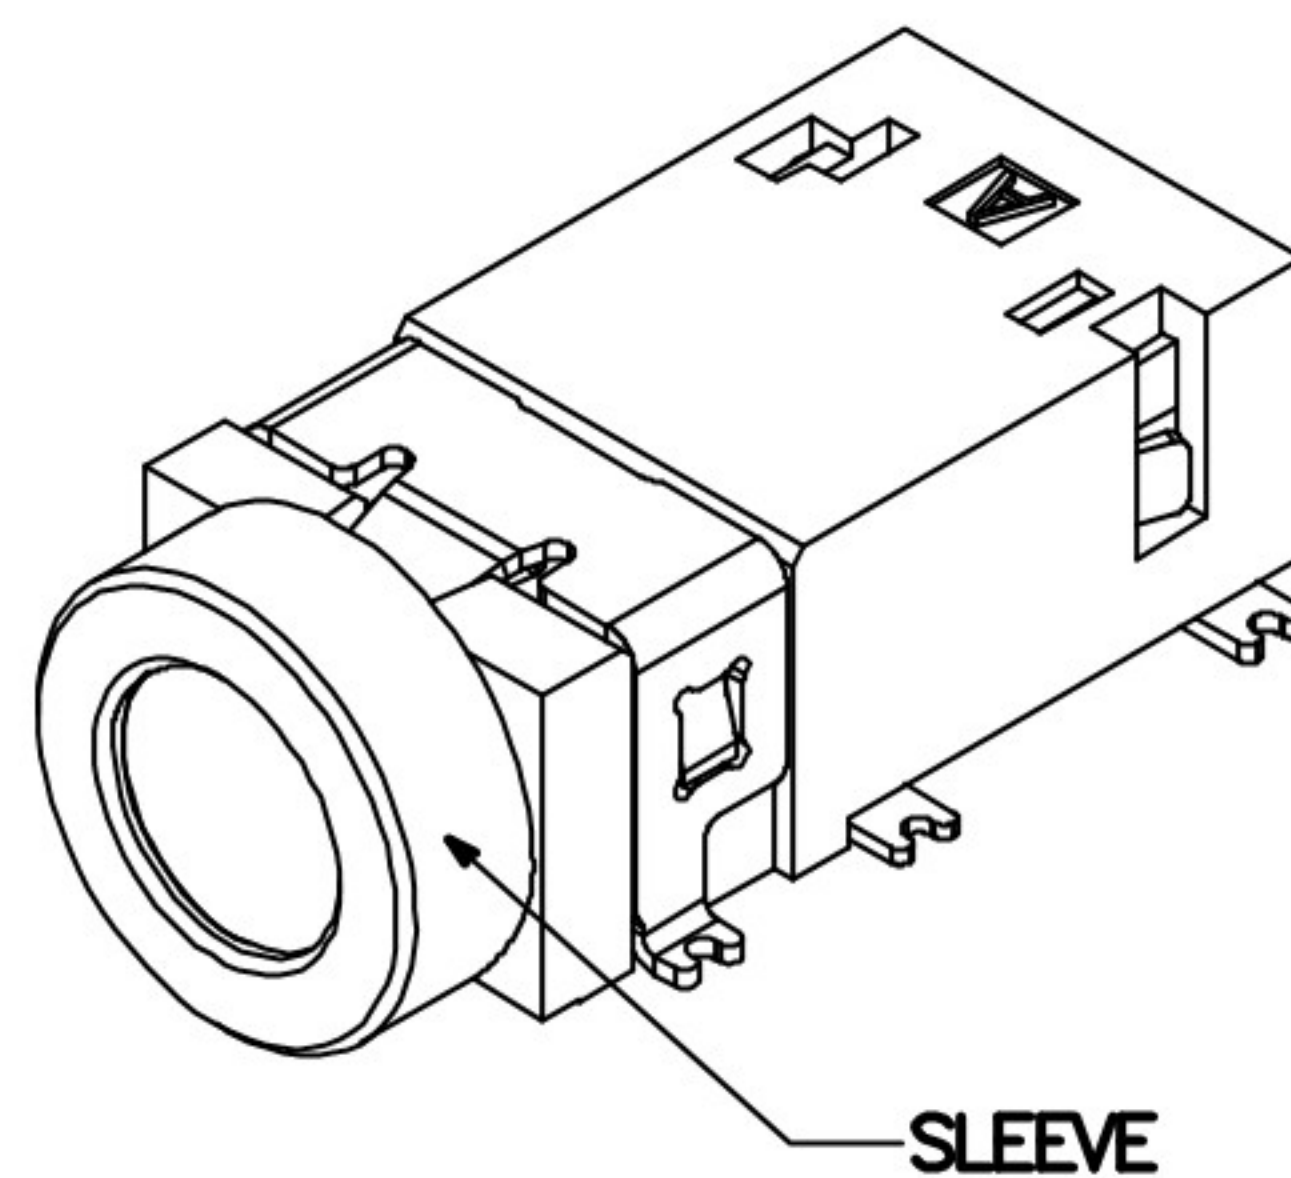



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	05/12/18"

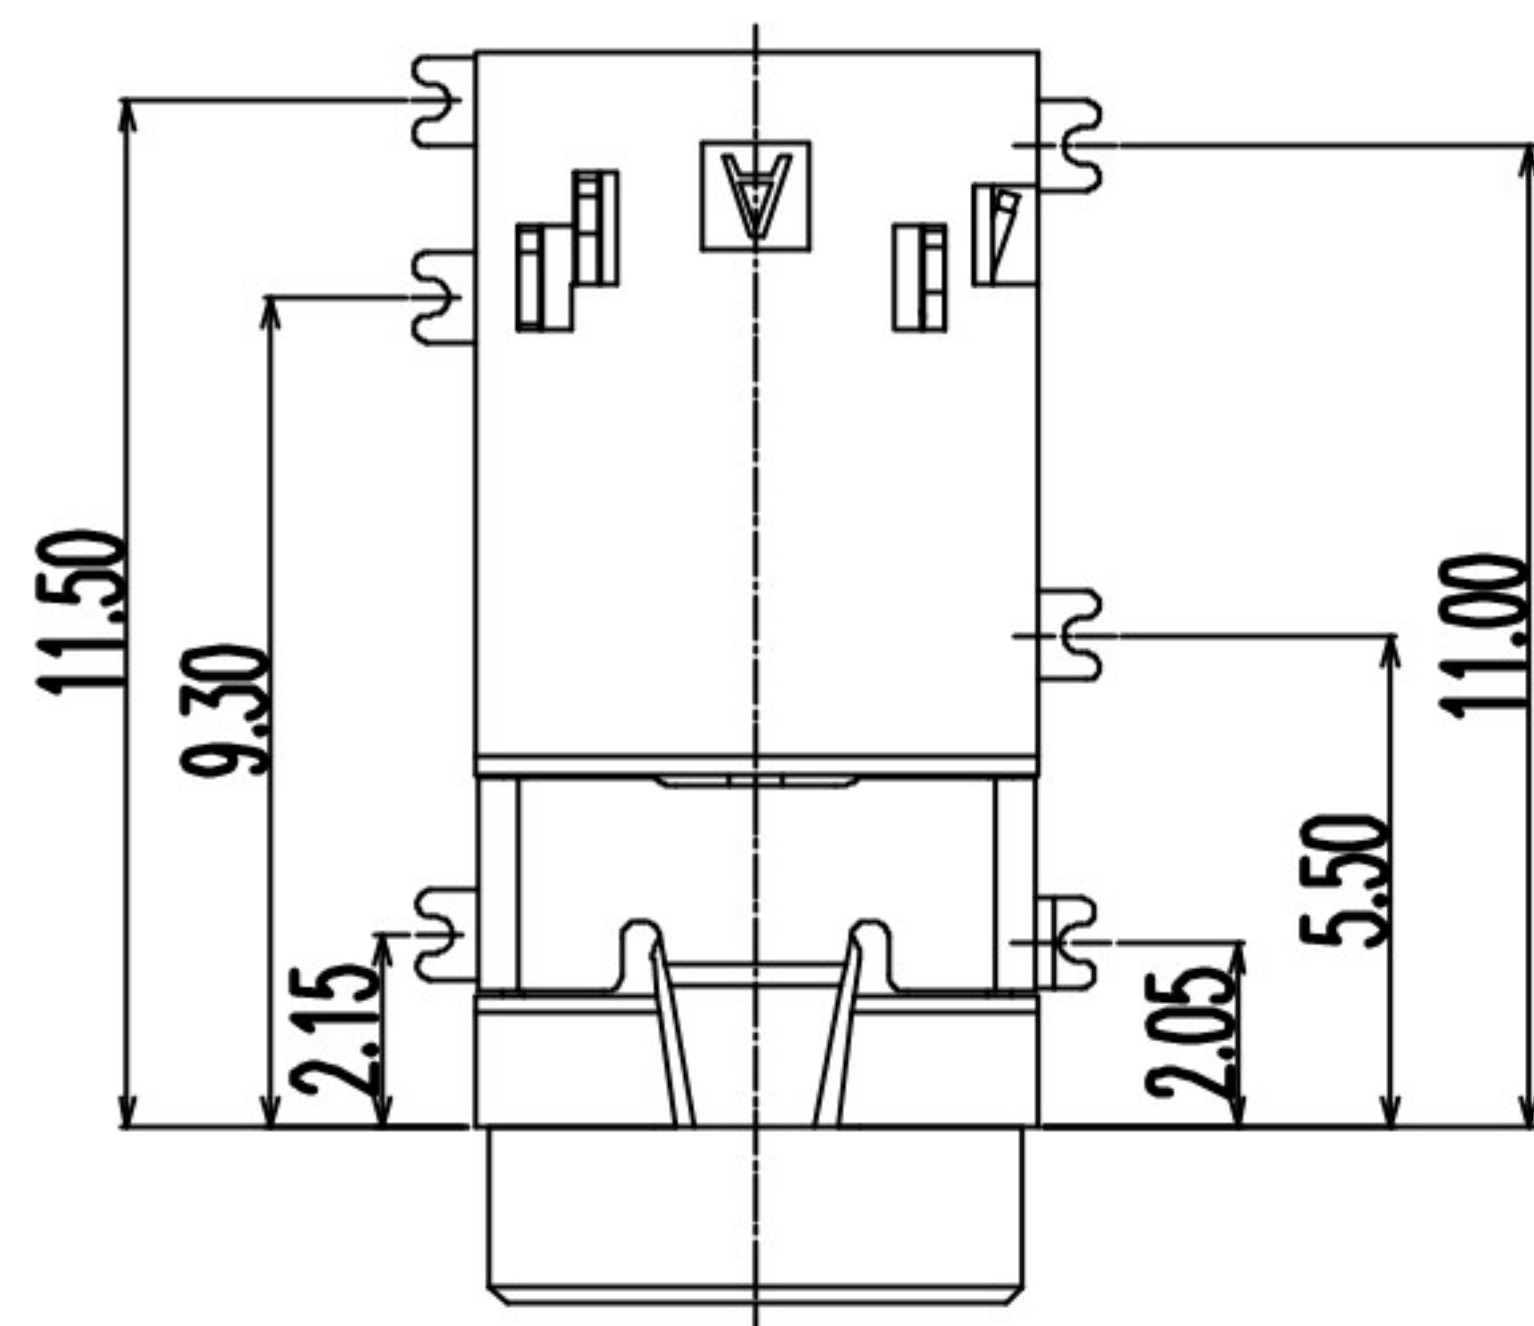





3D VIEW

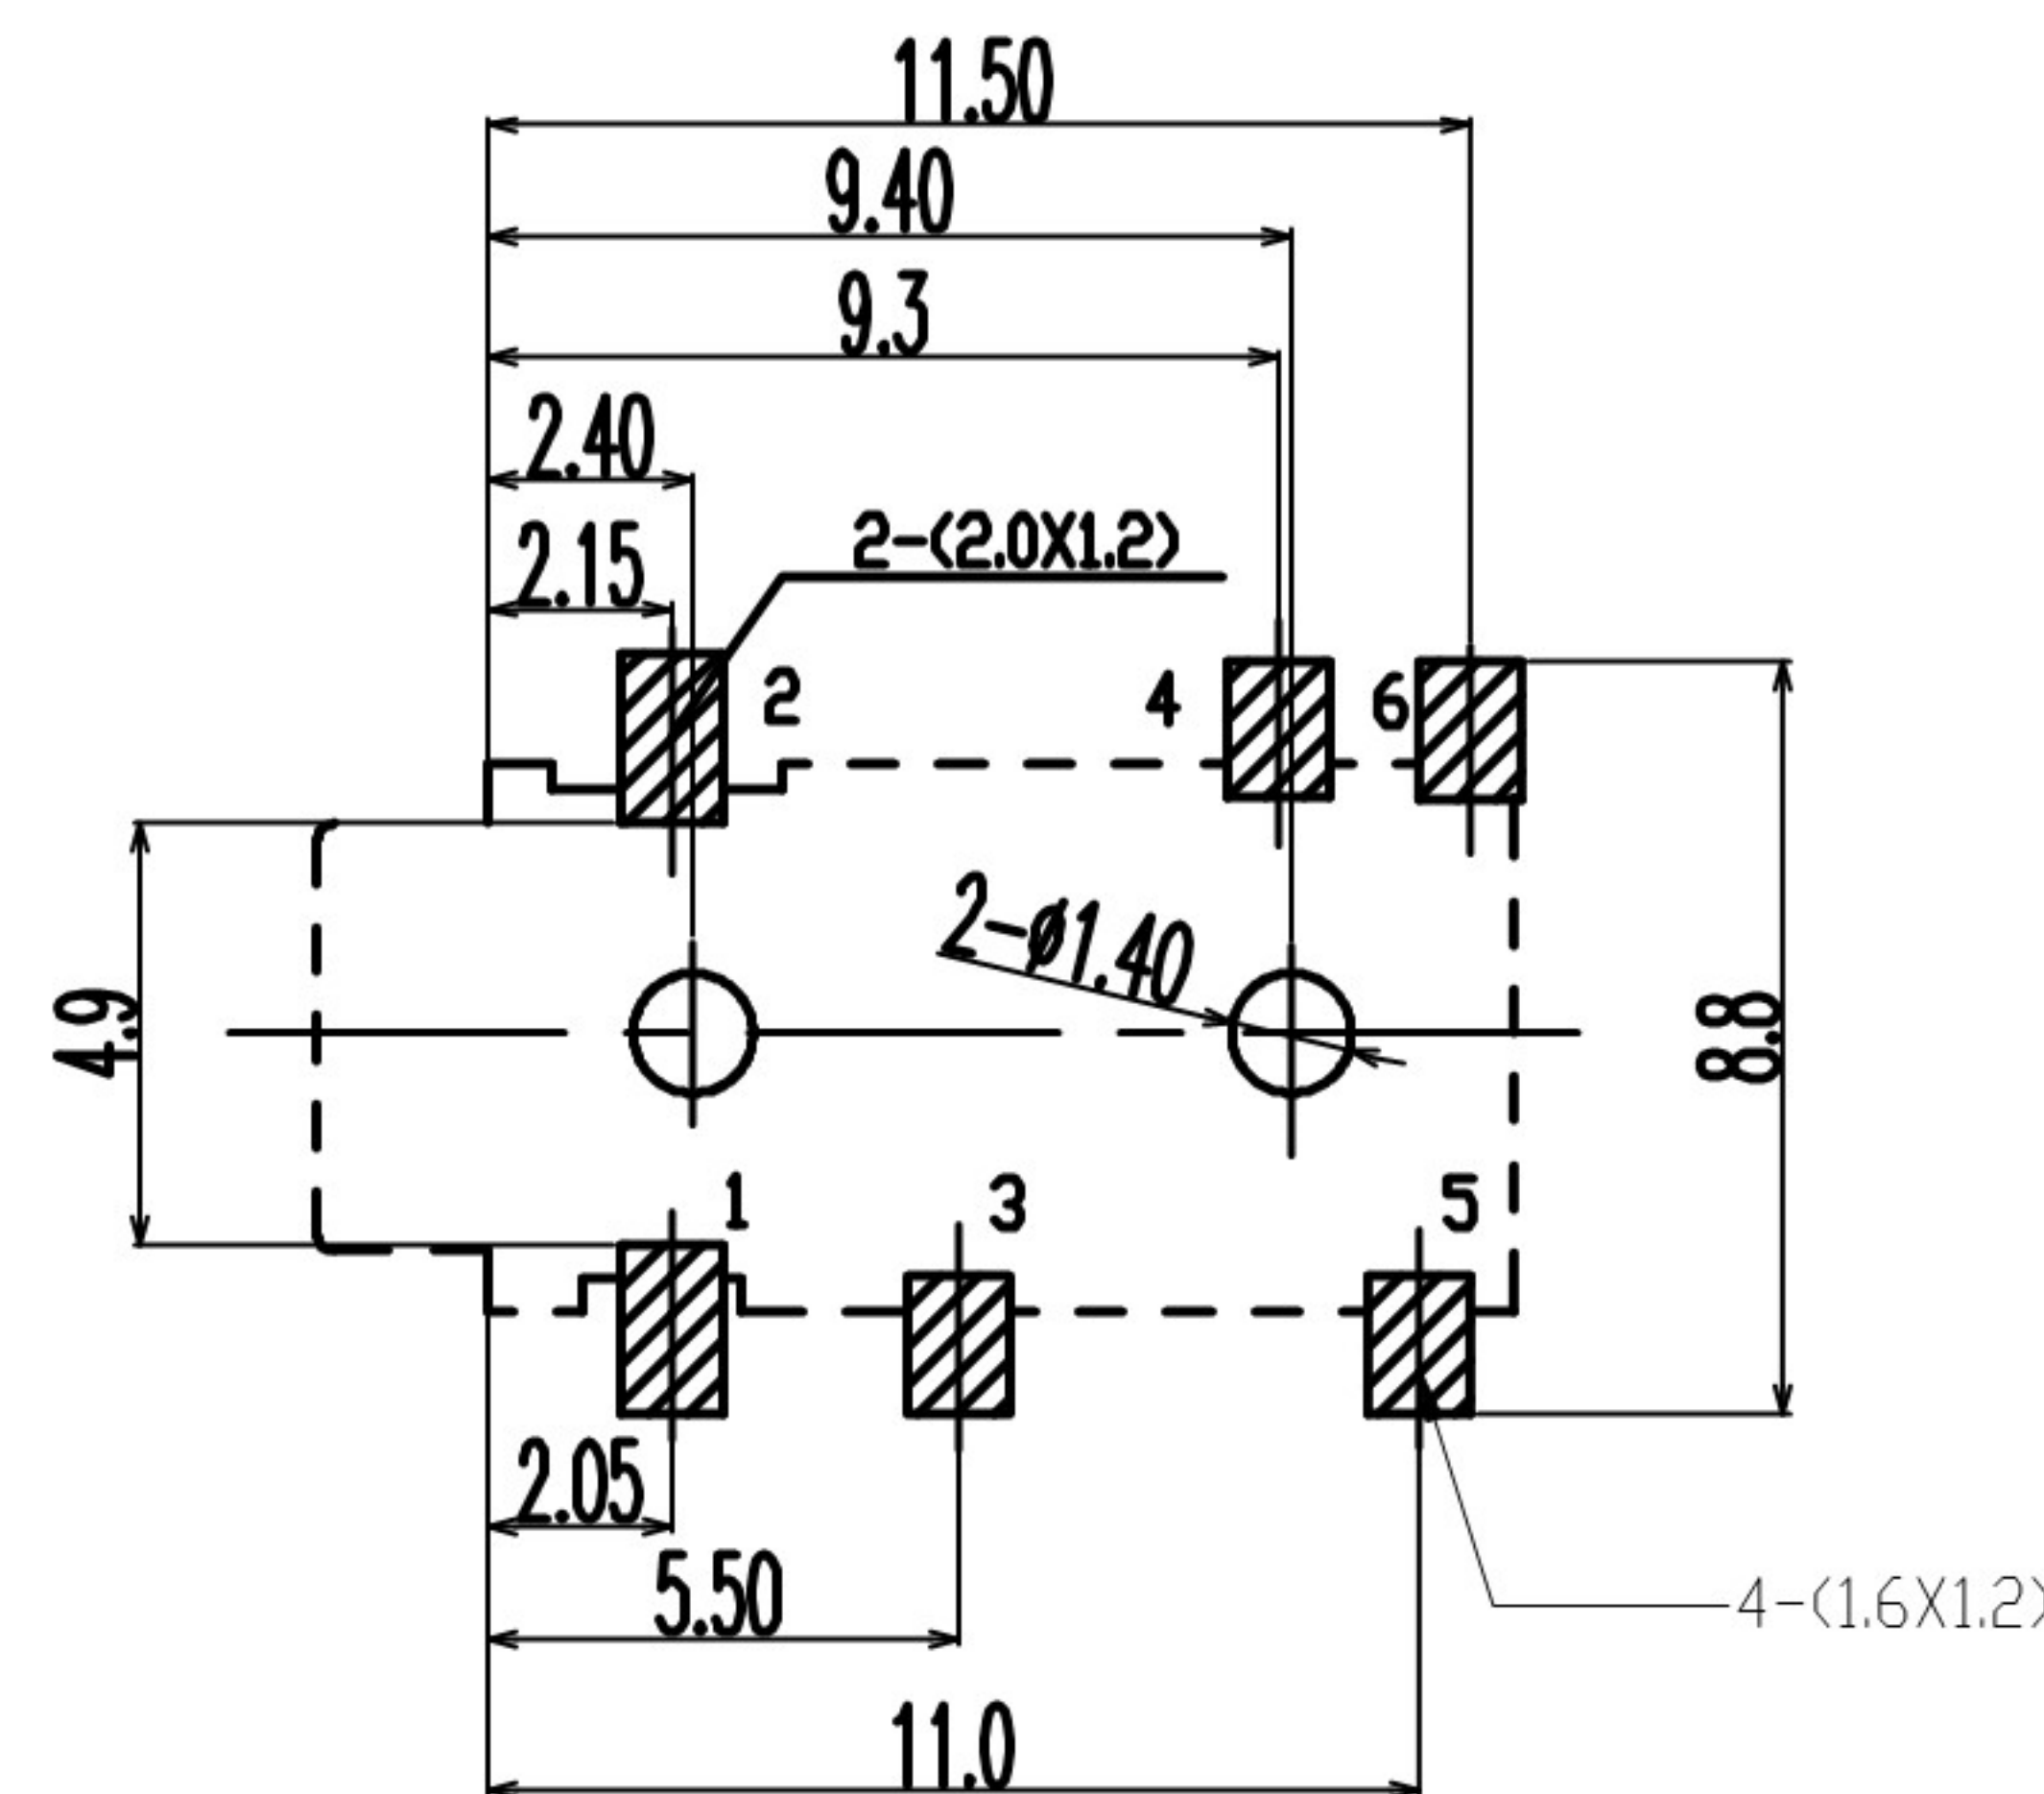

P.C.B LAYOUT
TOP VIEW

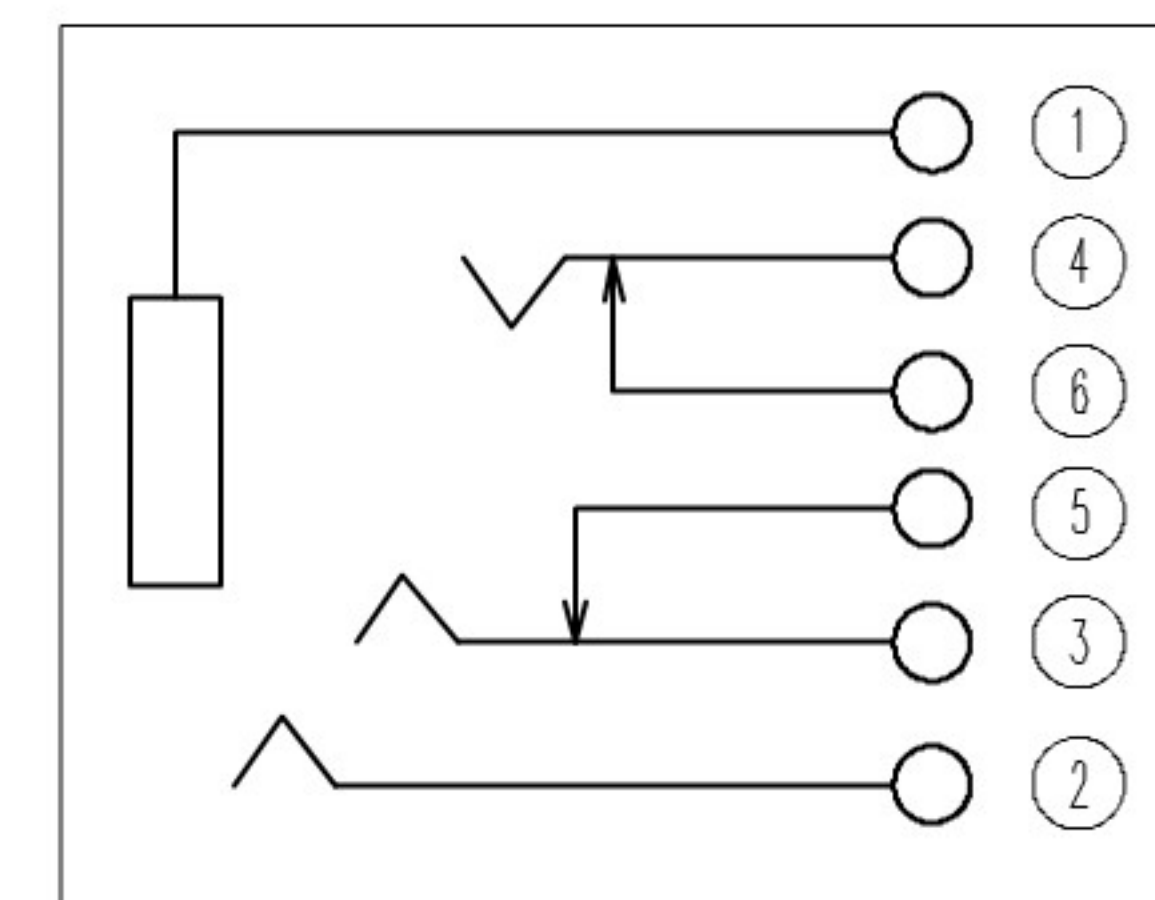

SCHEMATIC

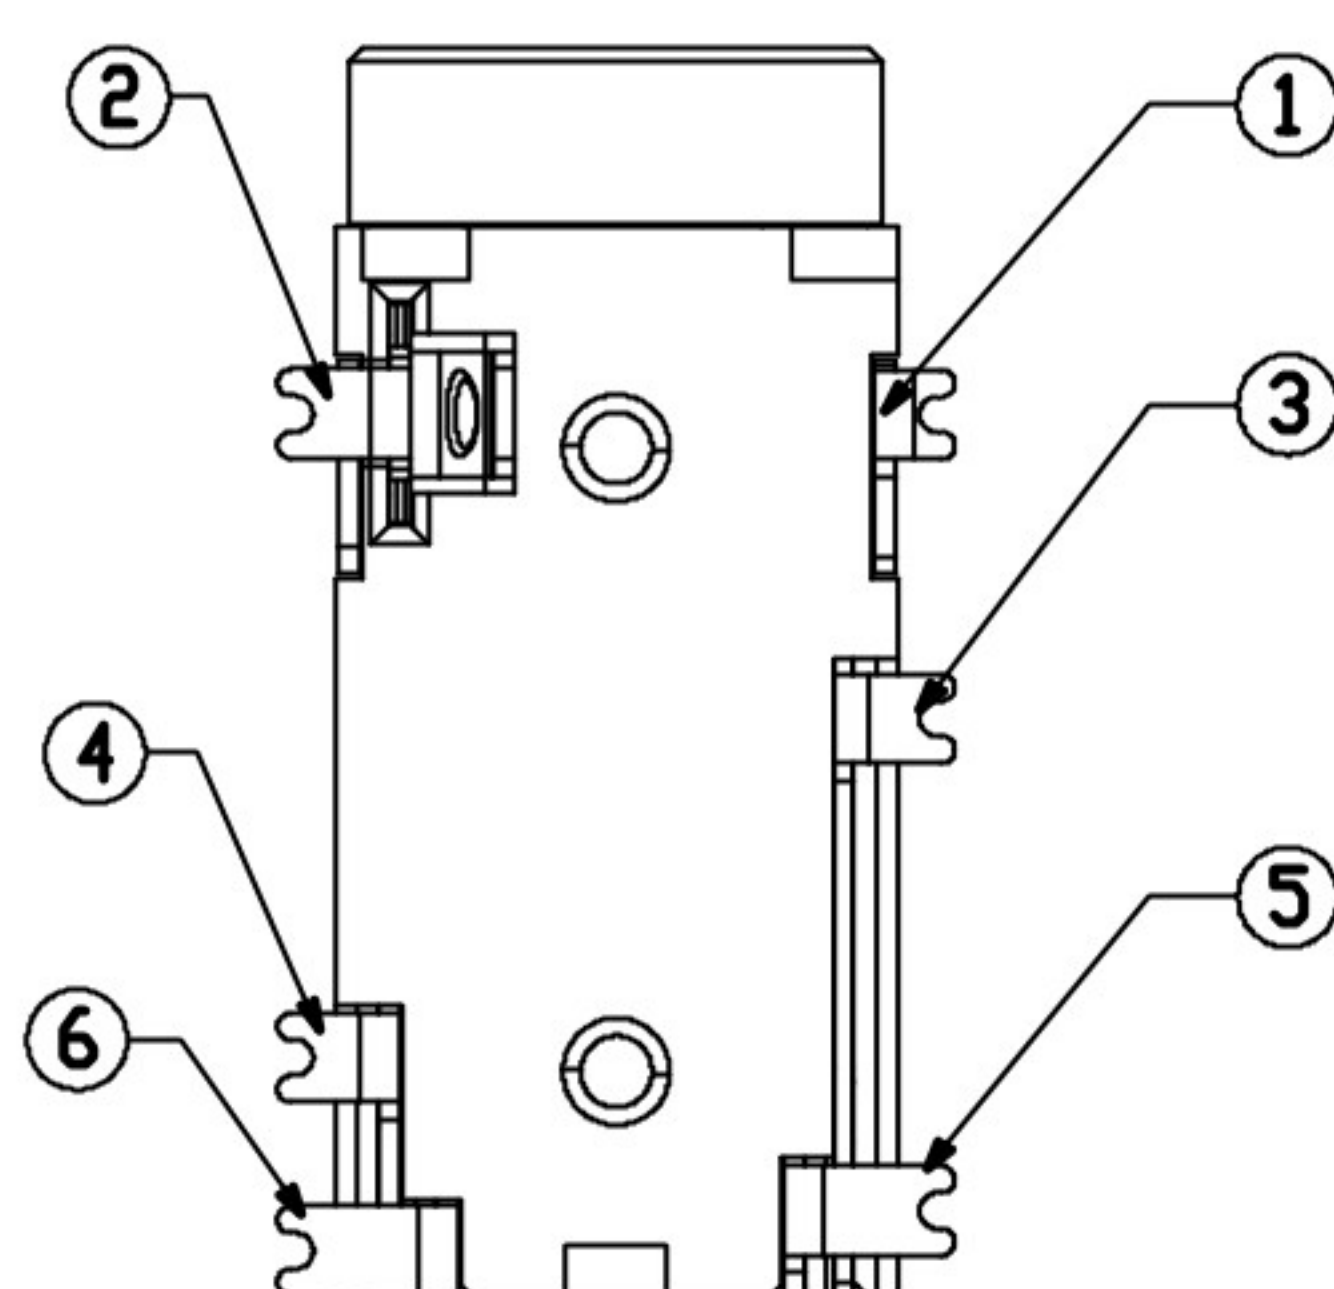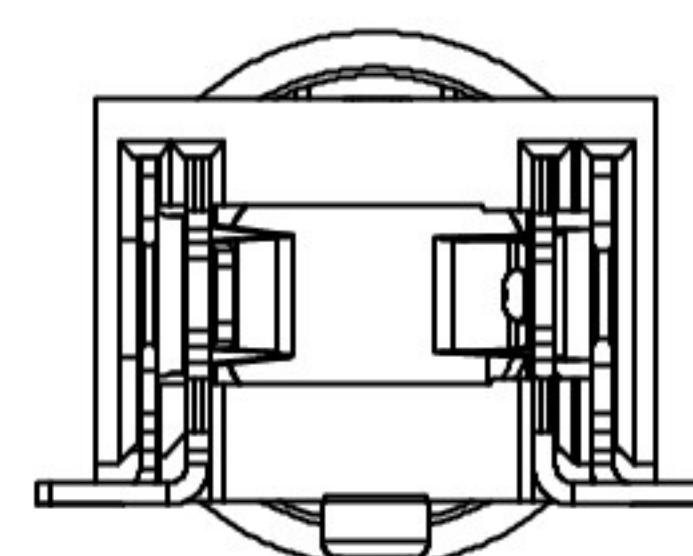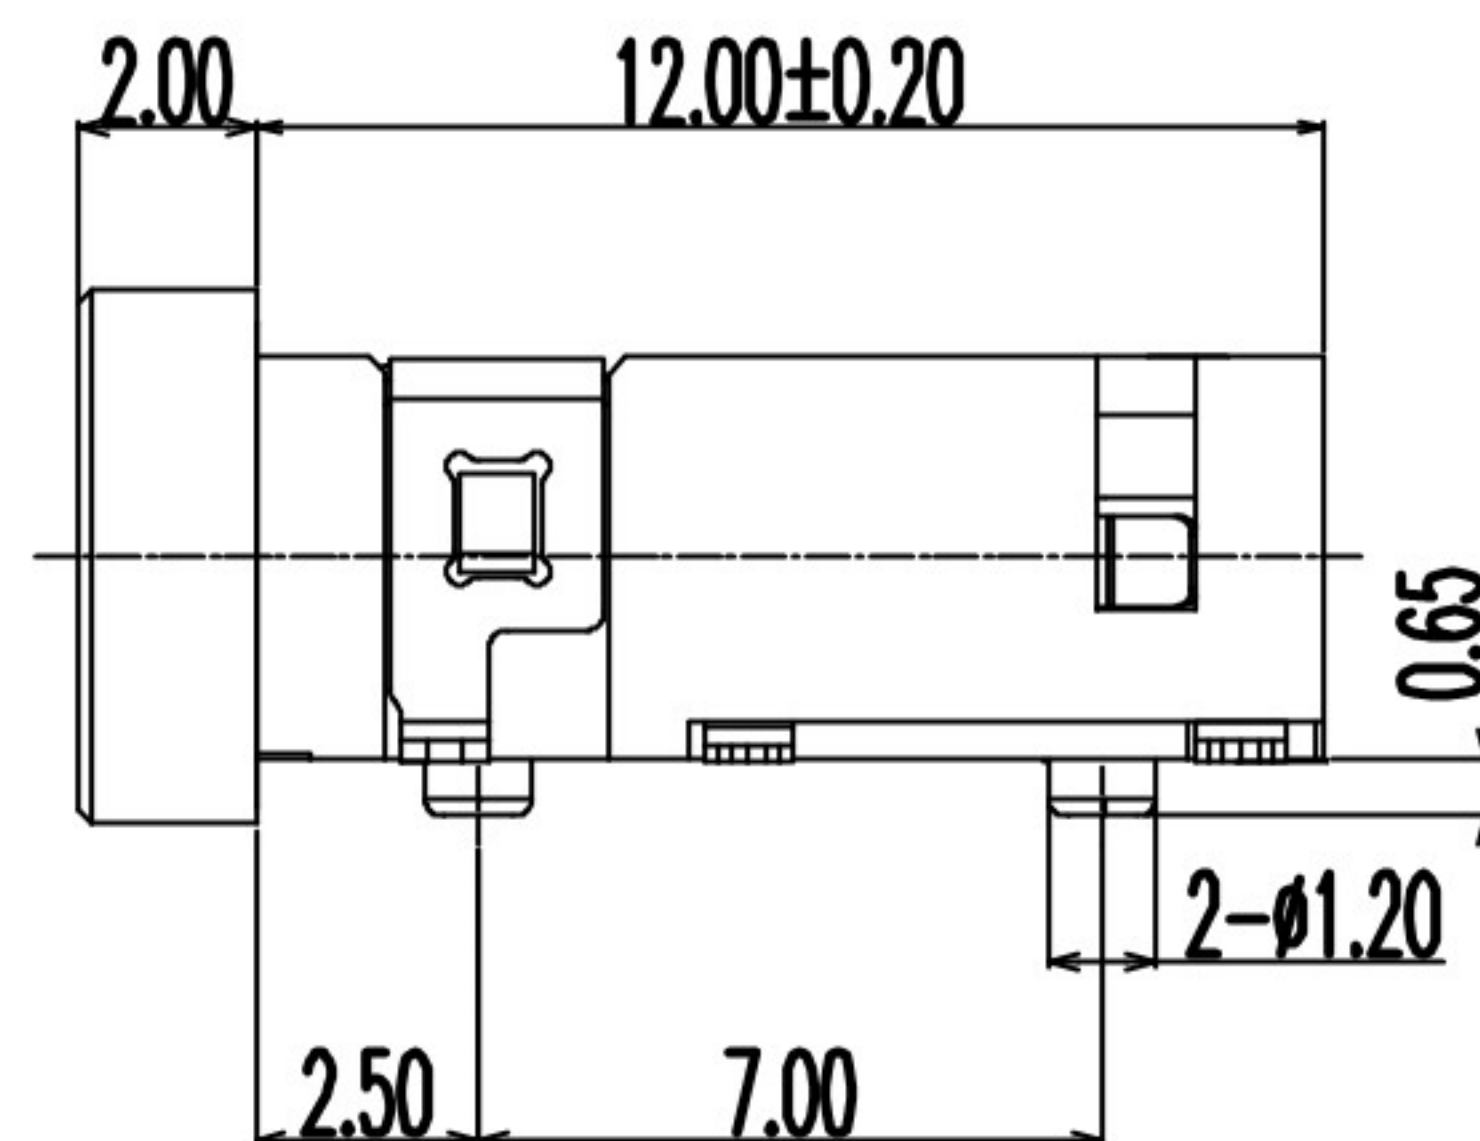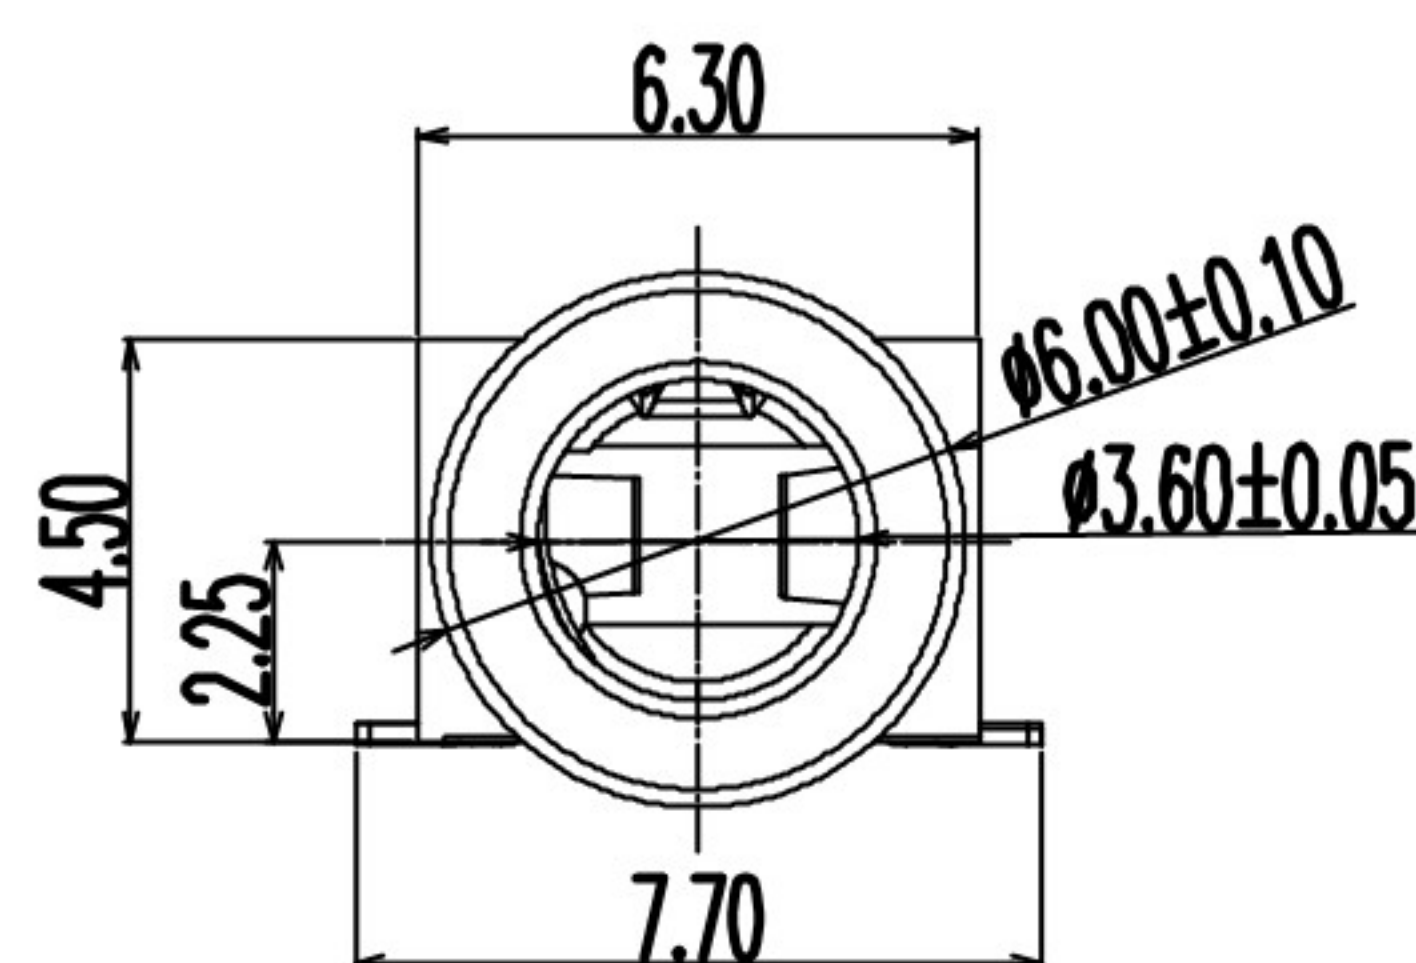

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

							主要技术性能		UNLESS OTHERWISE SPECIFIED TOLERANCES				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
							额定电负荷	DC 30V\0.5A										
4		盖 脚	1	磷 铜	0.25T	镀 银	接触电阻	≤0.03Ω	DECIMALS:	ANGLES:	DWG NO.	Q/XM-CP-RD-XXXX	PART NAME:					
3		弹片脚	1	镀青铜	0.2T	镀 银	绝缘电阻	≥100MΩ			DESIGN:	Kai	PHONE JACK					
2		中 脚	3	磷 铜	0.2T	镀 银	耐 压	AC500V(50Hz)/min	DIM	TOL	DIM	TOL	PART NO.					
1		基 座	1	PPA		黑 色	插 拔 力	3-20N	X.	±0.35	X.	±2°	CHECK:	Lucky	XB-PJ-342B			
序号	产 品 编 号	产 品 名 称	数 量	材 料	规 格	电 镀	使用温度范围	-30~70℃	X.X	±0.30	X.X	±1°	APPROVED	Lucky		REV. A	UNIT: mm	SHEET: 1/1
							使用寿命	5000次	X.XX	±0.20	X.XX	—		Lucky				
														X.XXX	±0.10			