
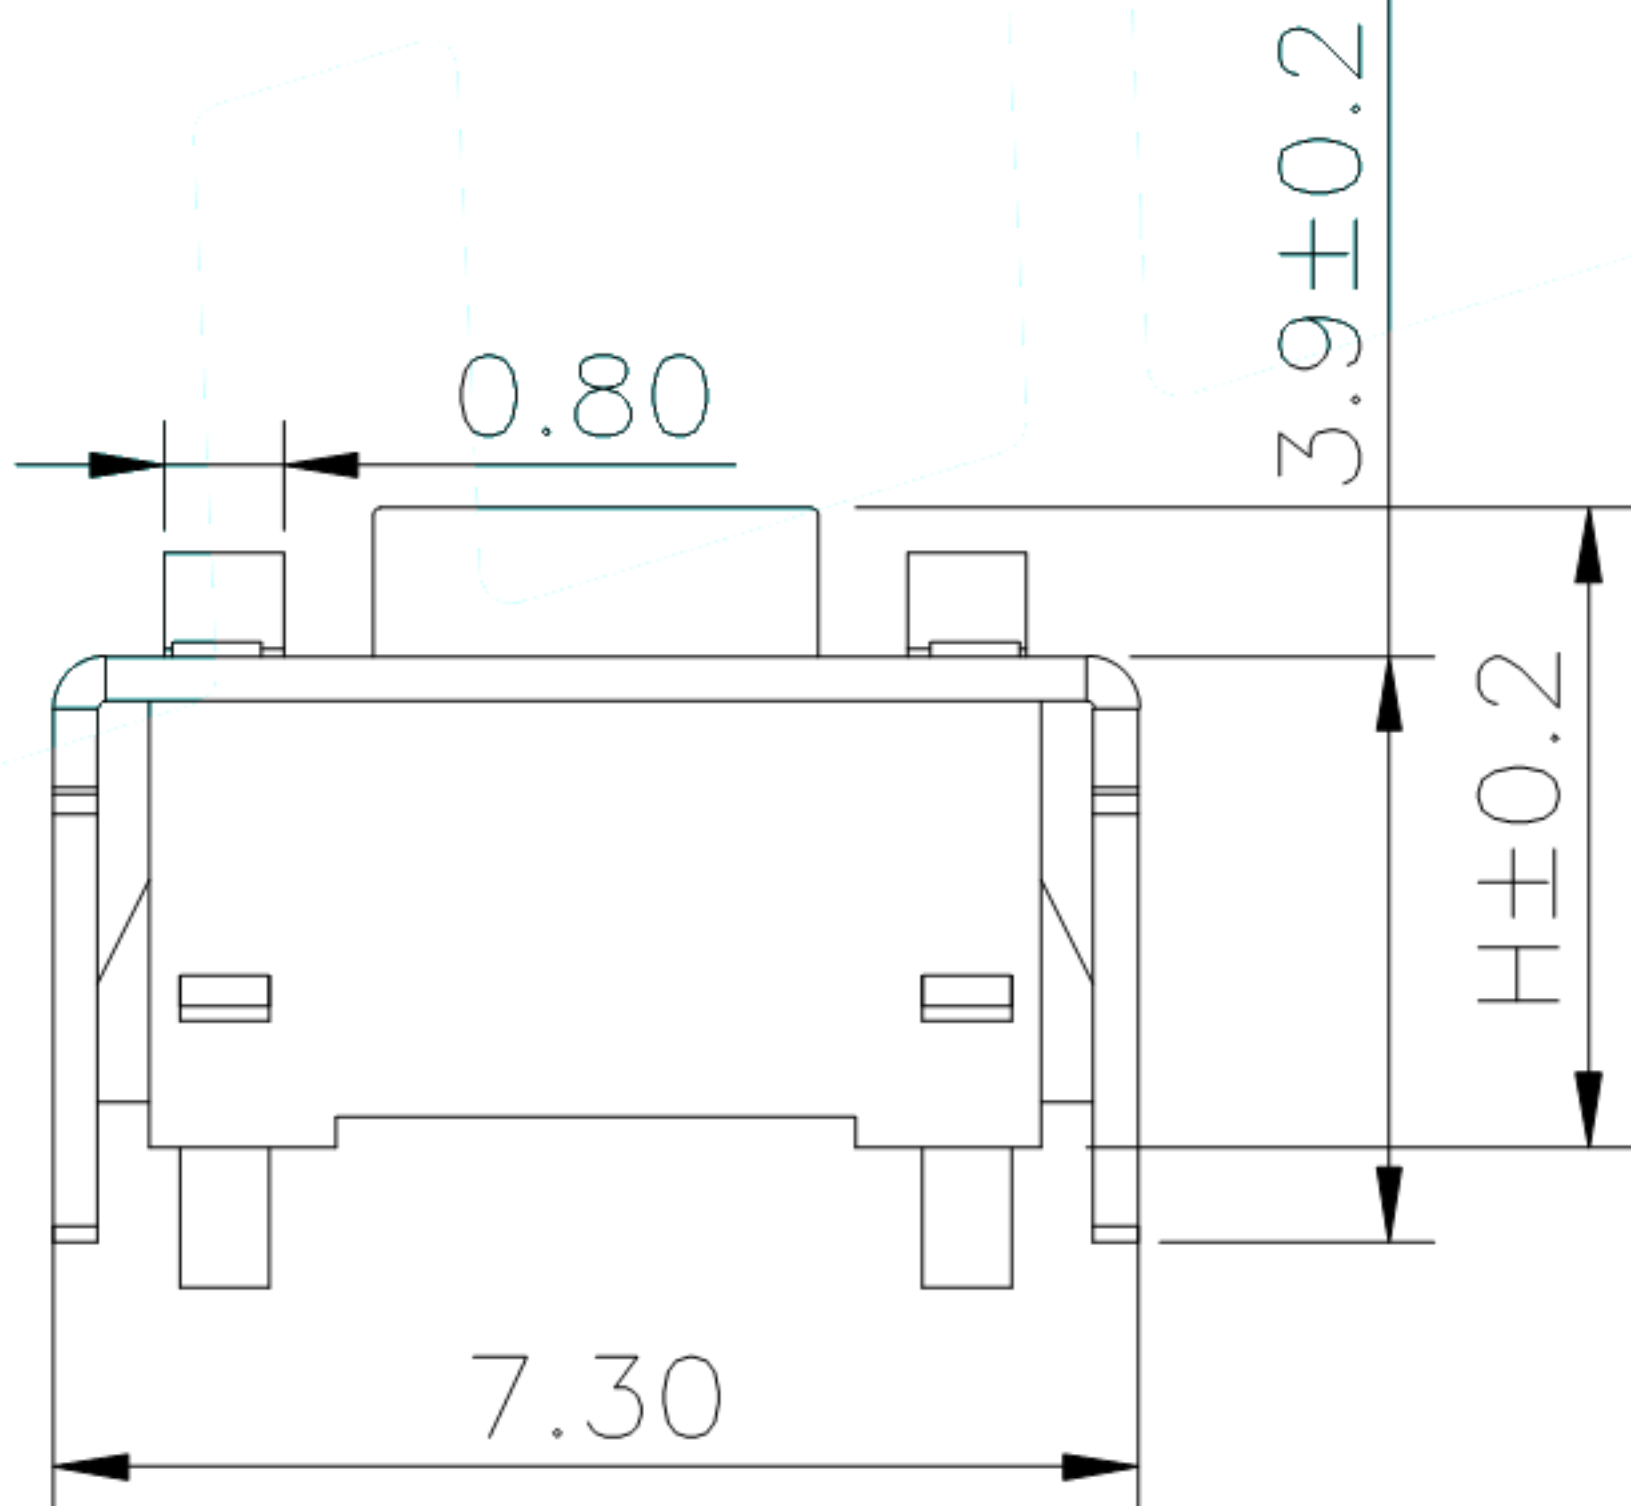
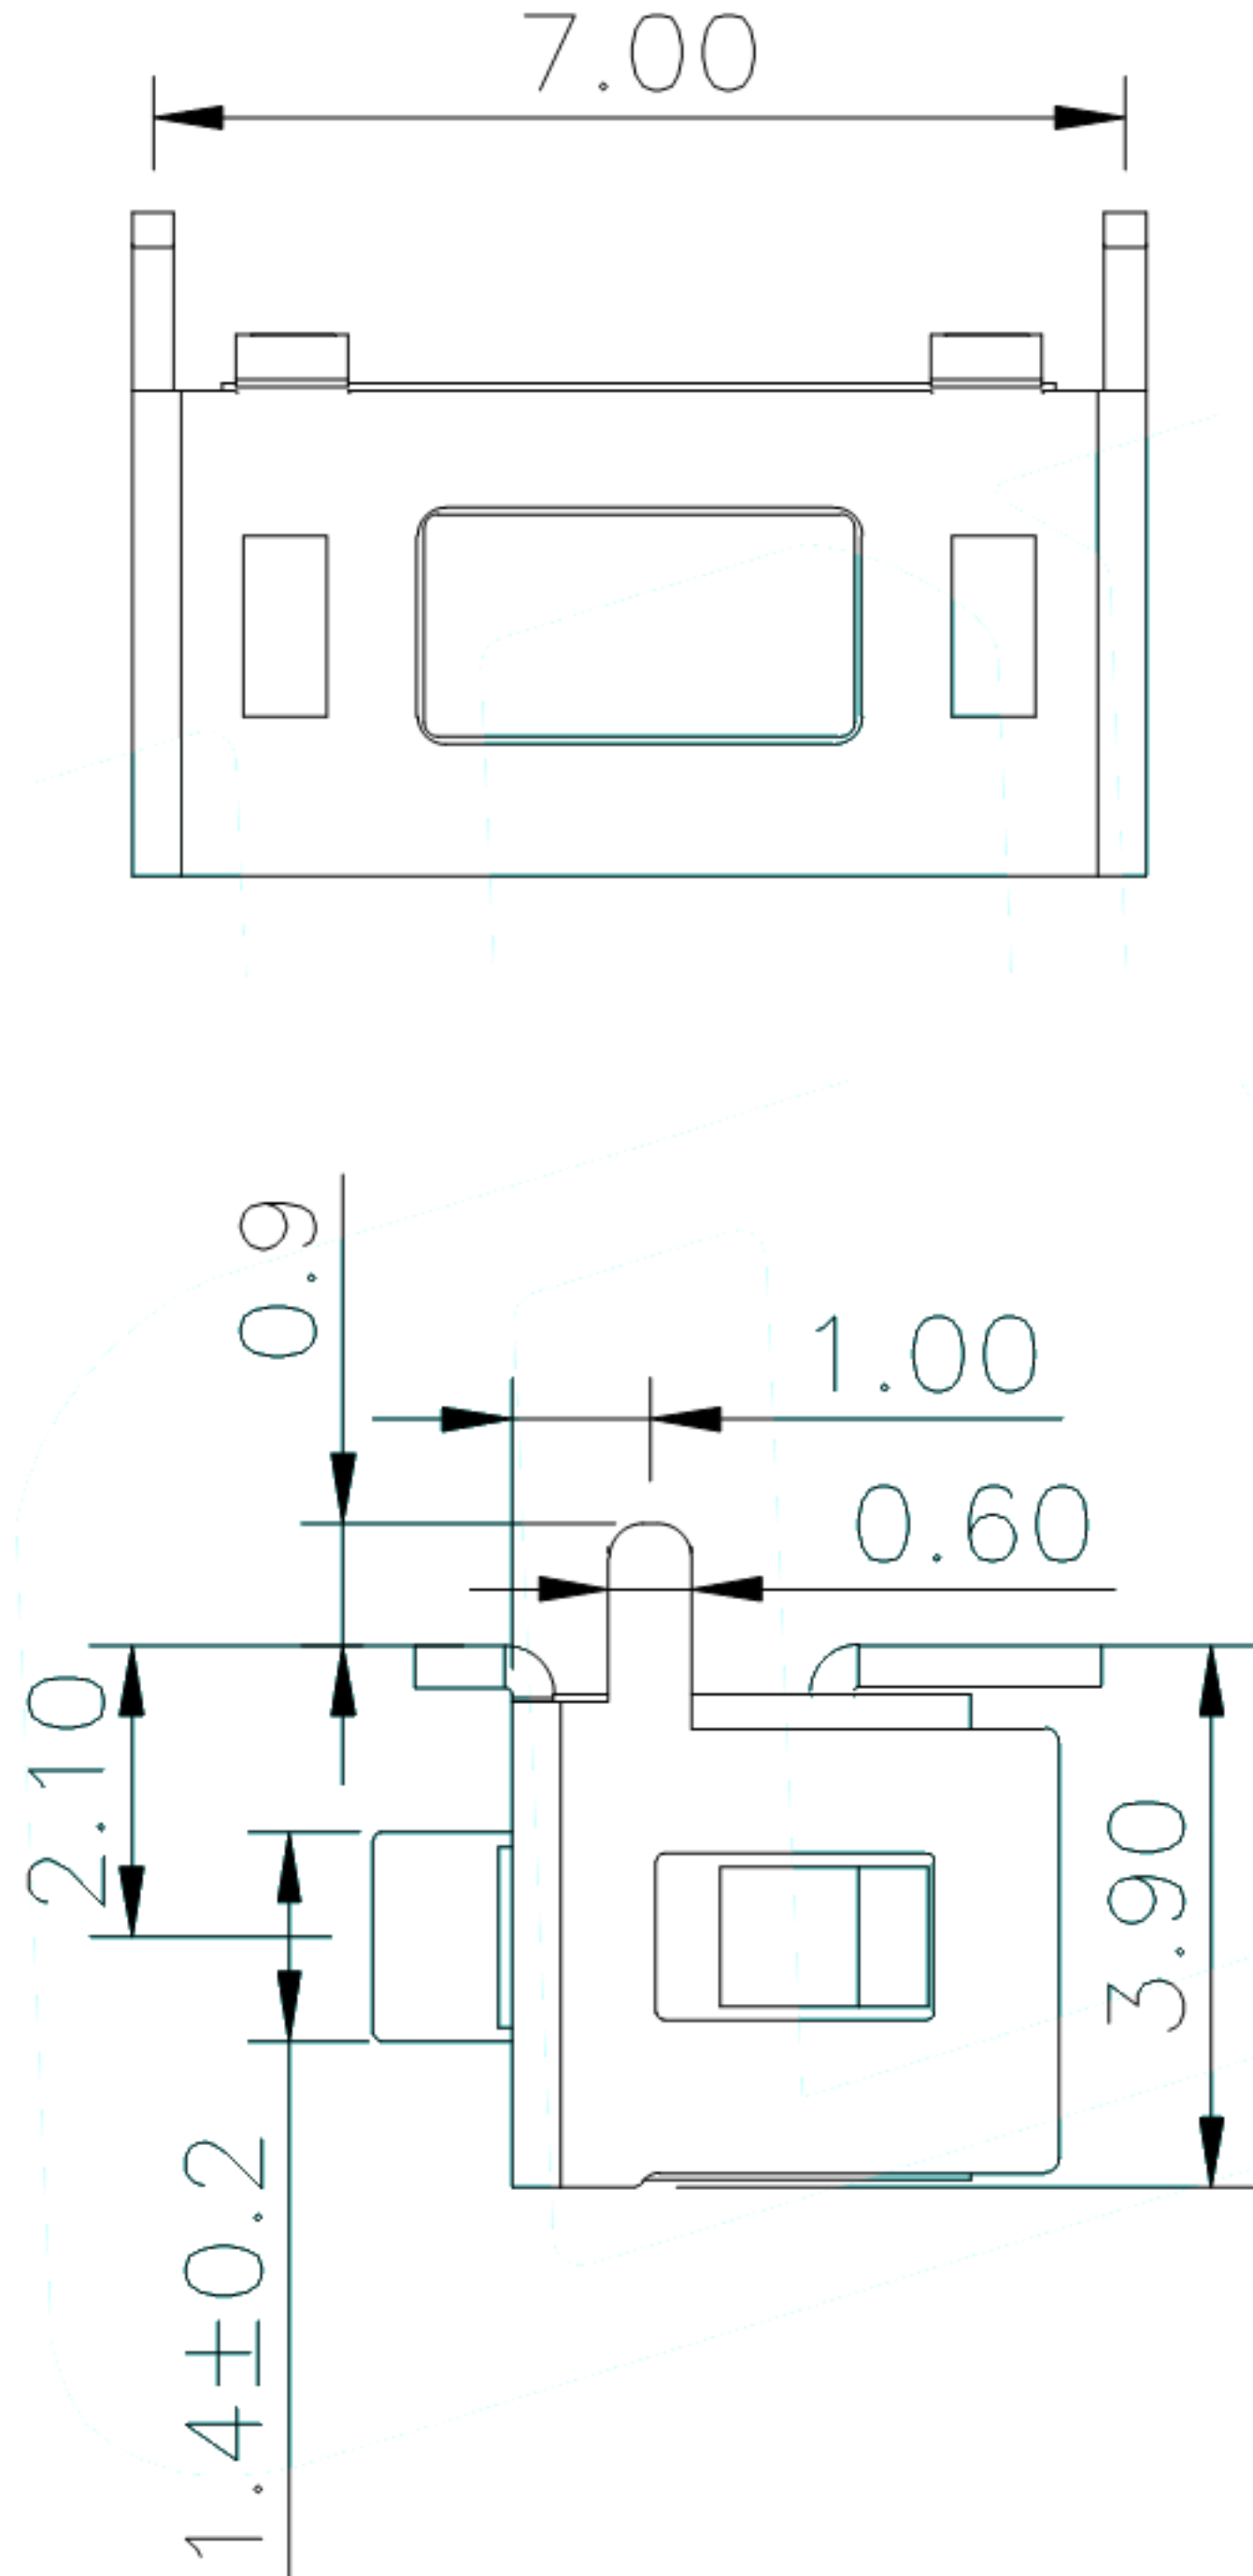
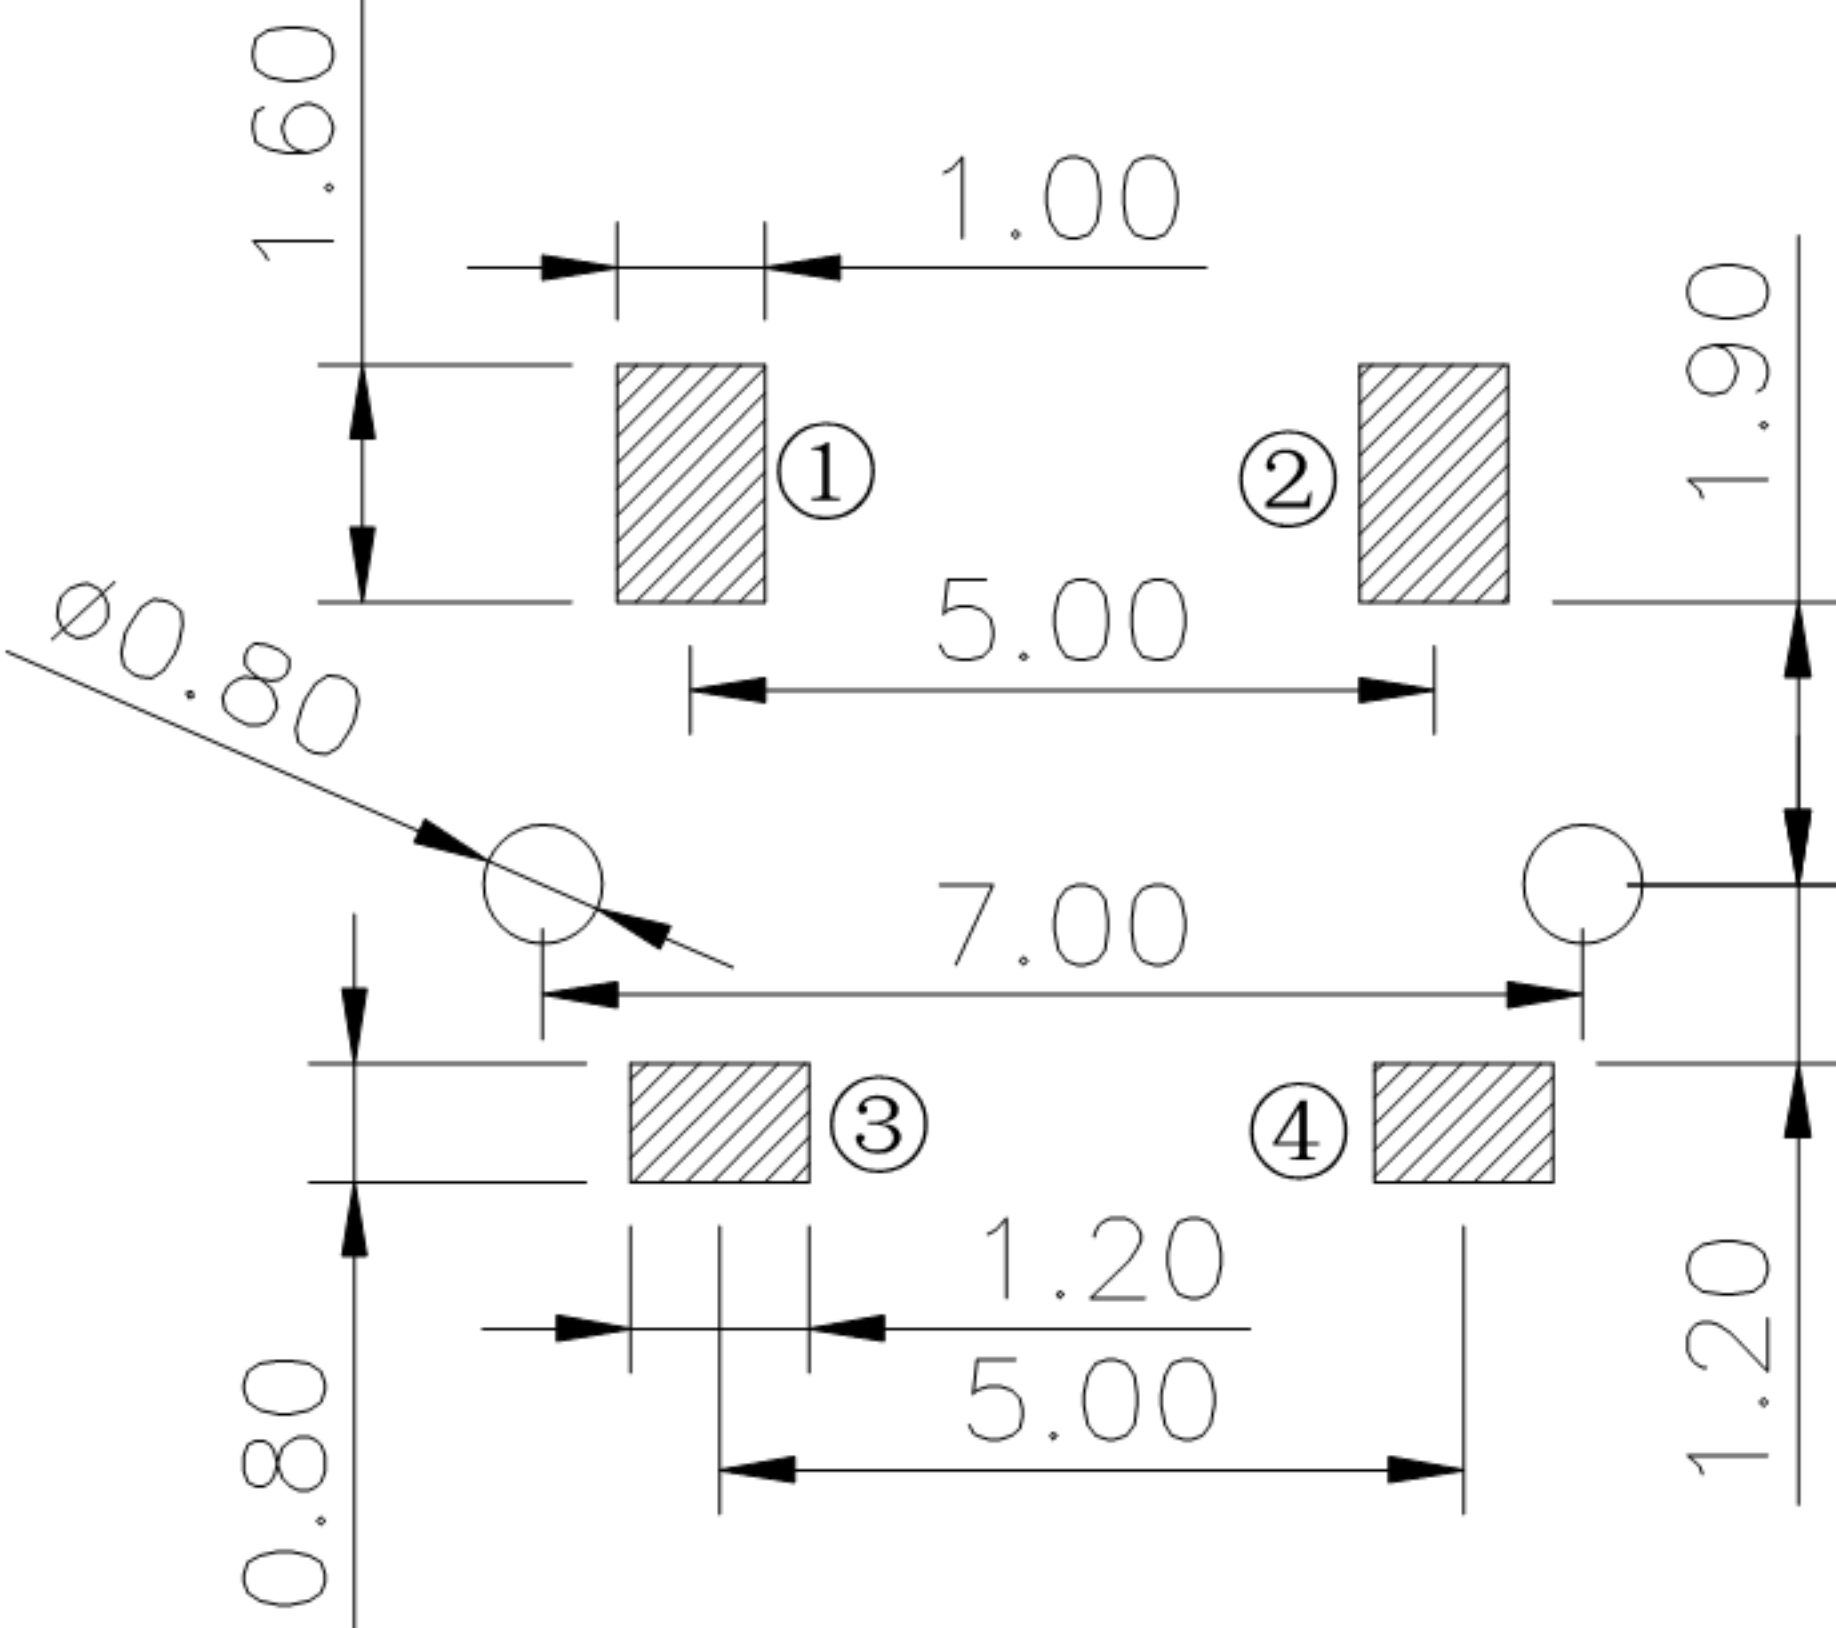


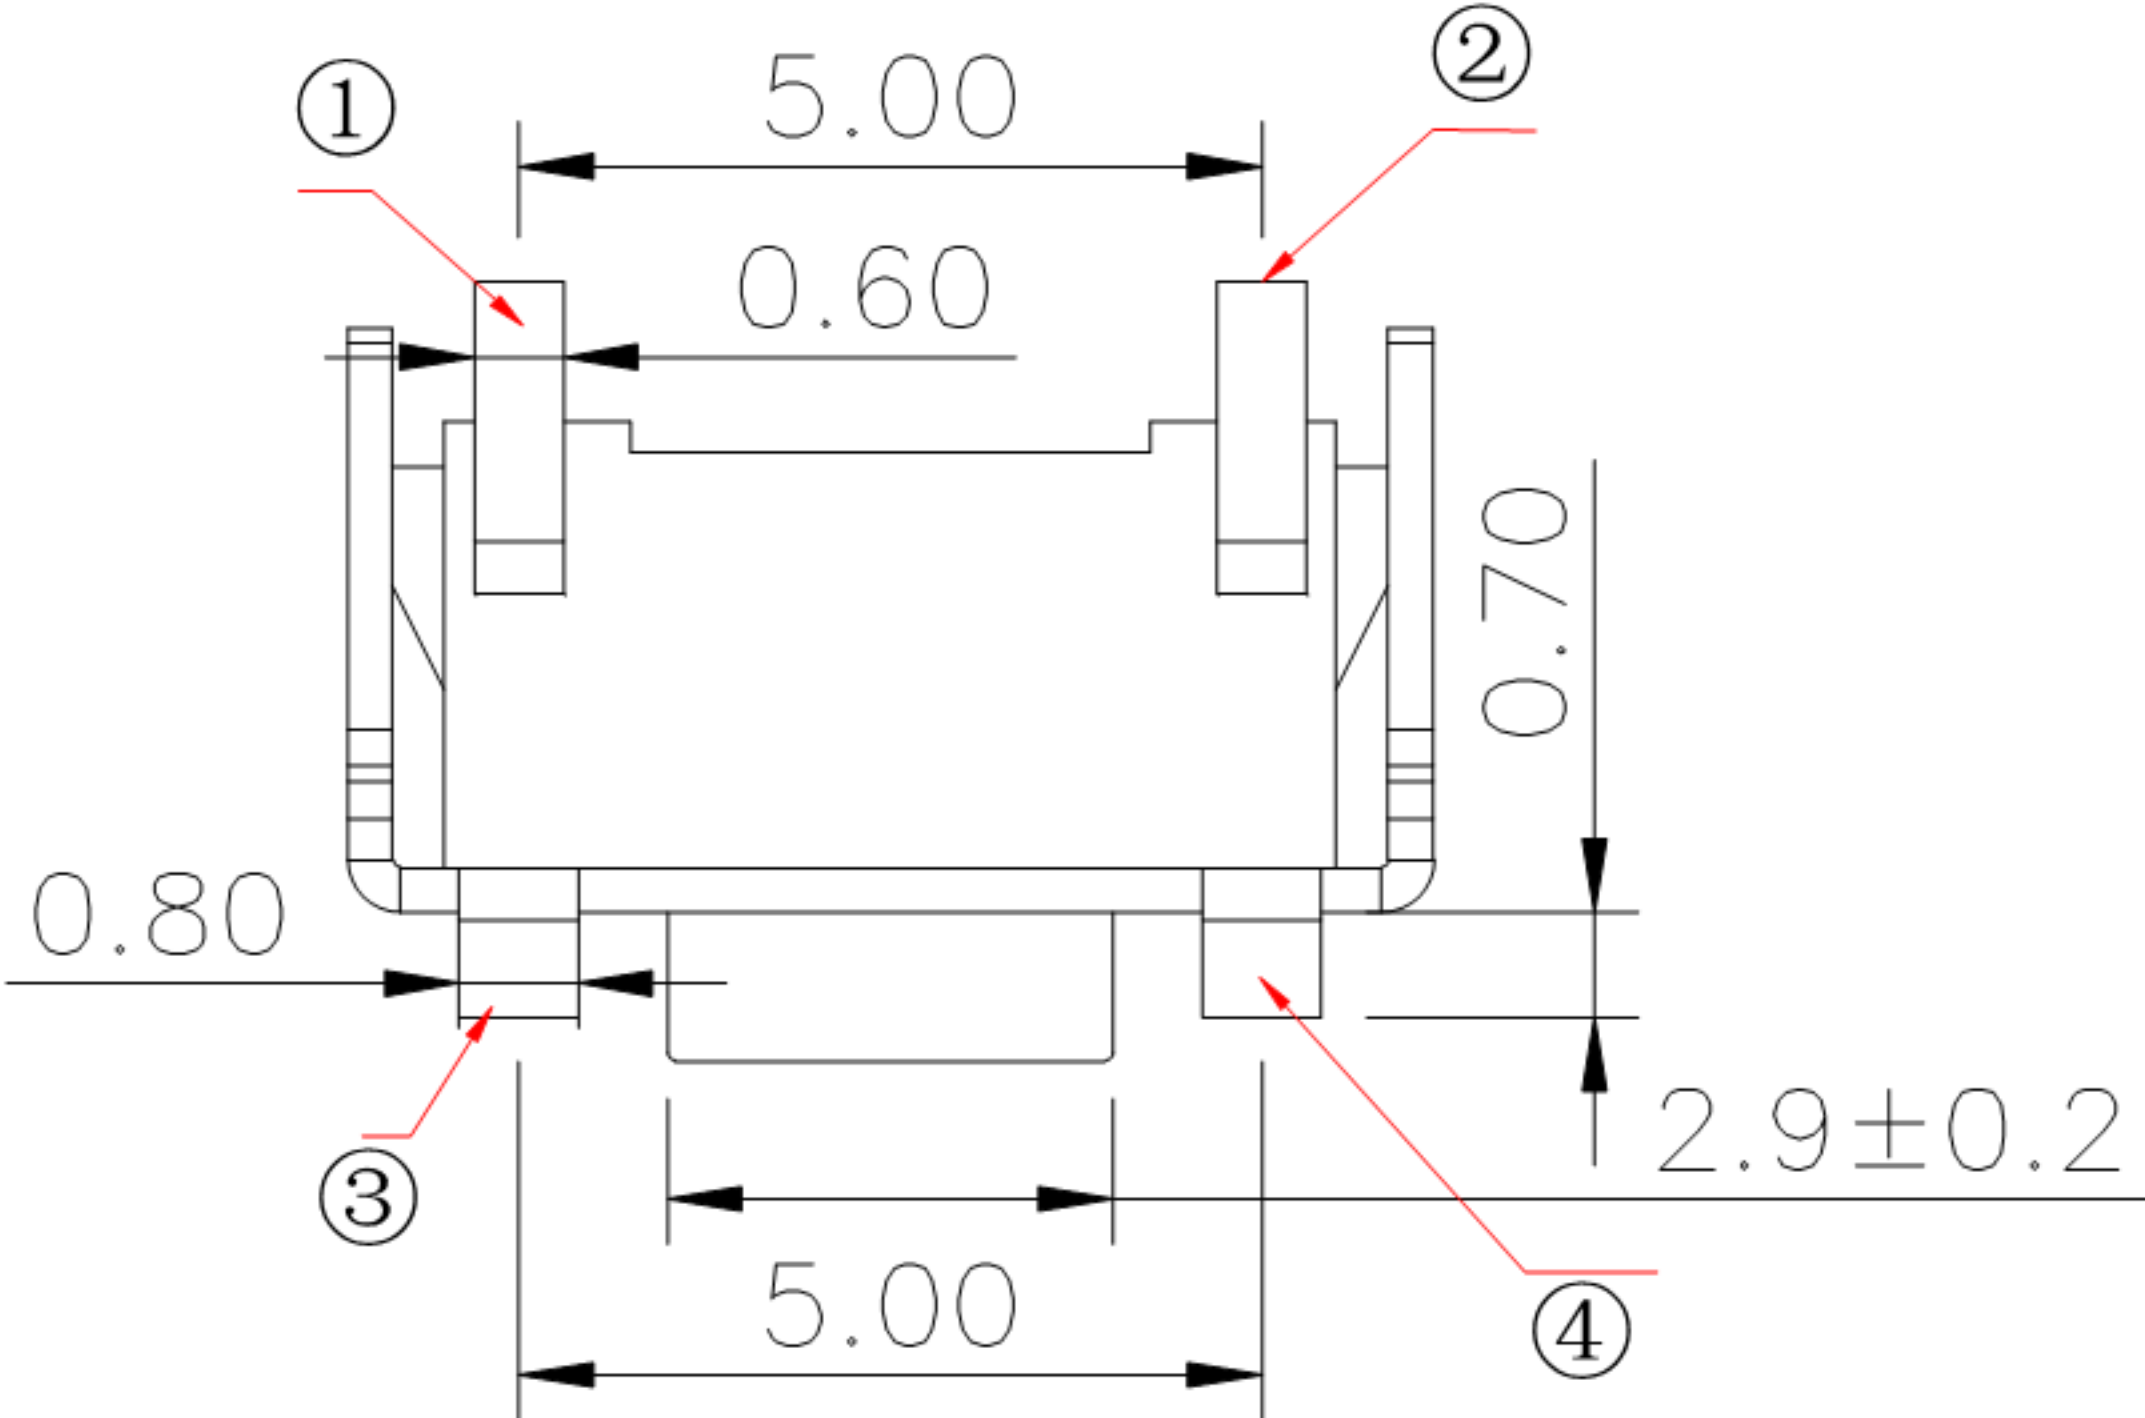

CAD FILE:

①—②

③—④

Circuit Diagram

SCHEMATIC

PCB Layout(Pattern side)

Typical Specifications

- 1.Rating : DC 12V 50mA
- 2.Contact Resistance: ≤100mΩ
- 3.Insulation Resistance: ≥100mΩ
- 4.Operating Force: 160±30gf
- 5.Travel:0.20±0.1mm
- 6.Life : 50,000 Cycles

NO.1

PART NO	H
A	4.3
B	4.5
C	5.0
E	6.0
G	7.0
I	8.0

NO.2—NO.3

PART NO	NOTE
01~99	SERIAL NUMBER

注：“*” 表示关键尺寸(4个).

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-1101SP
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					