
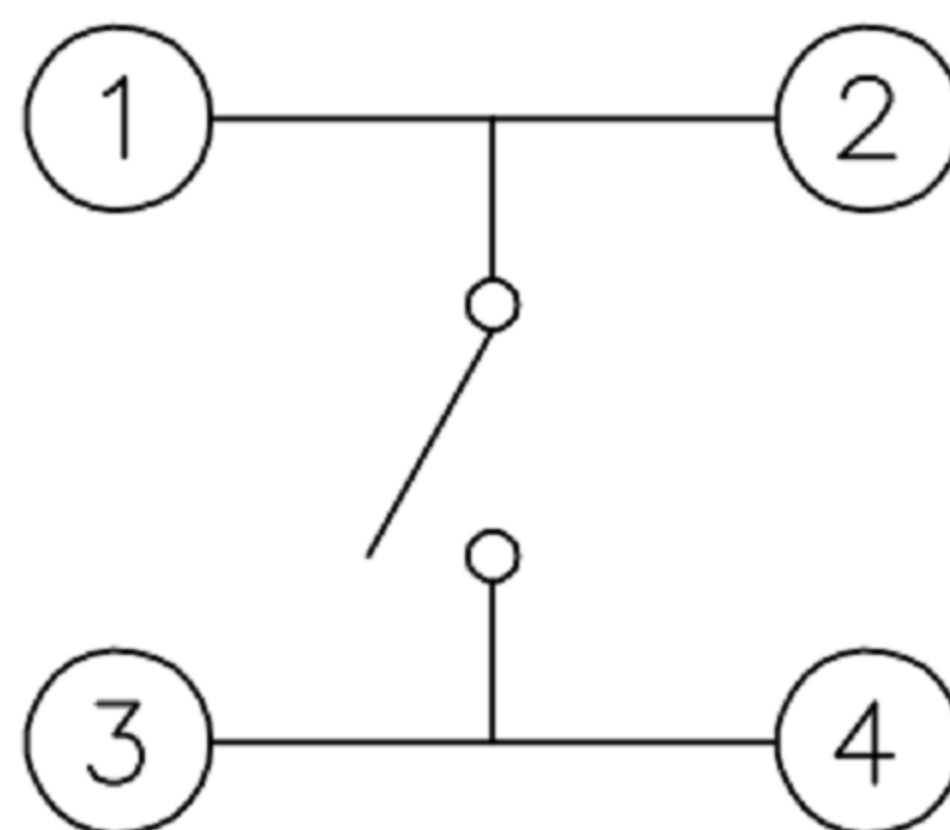
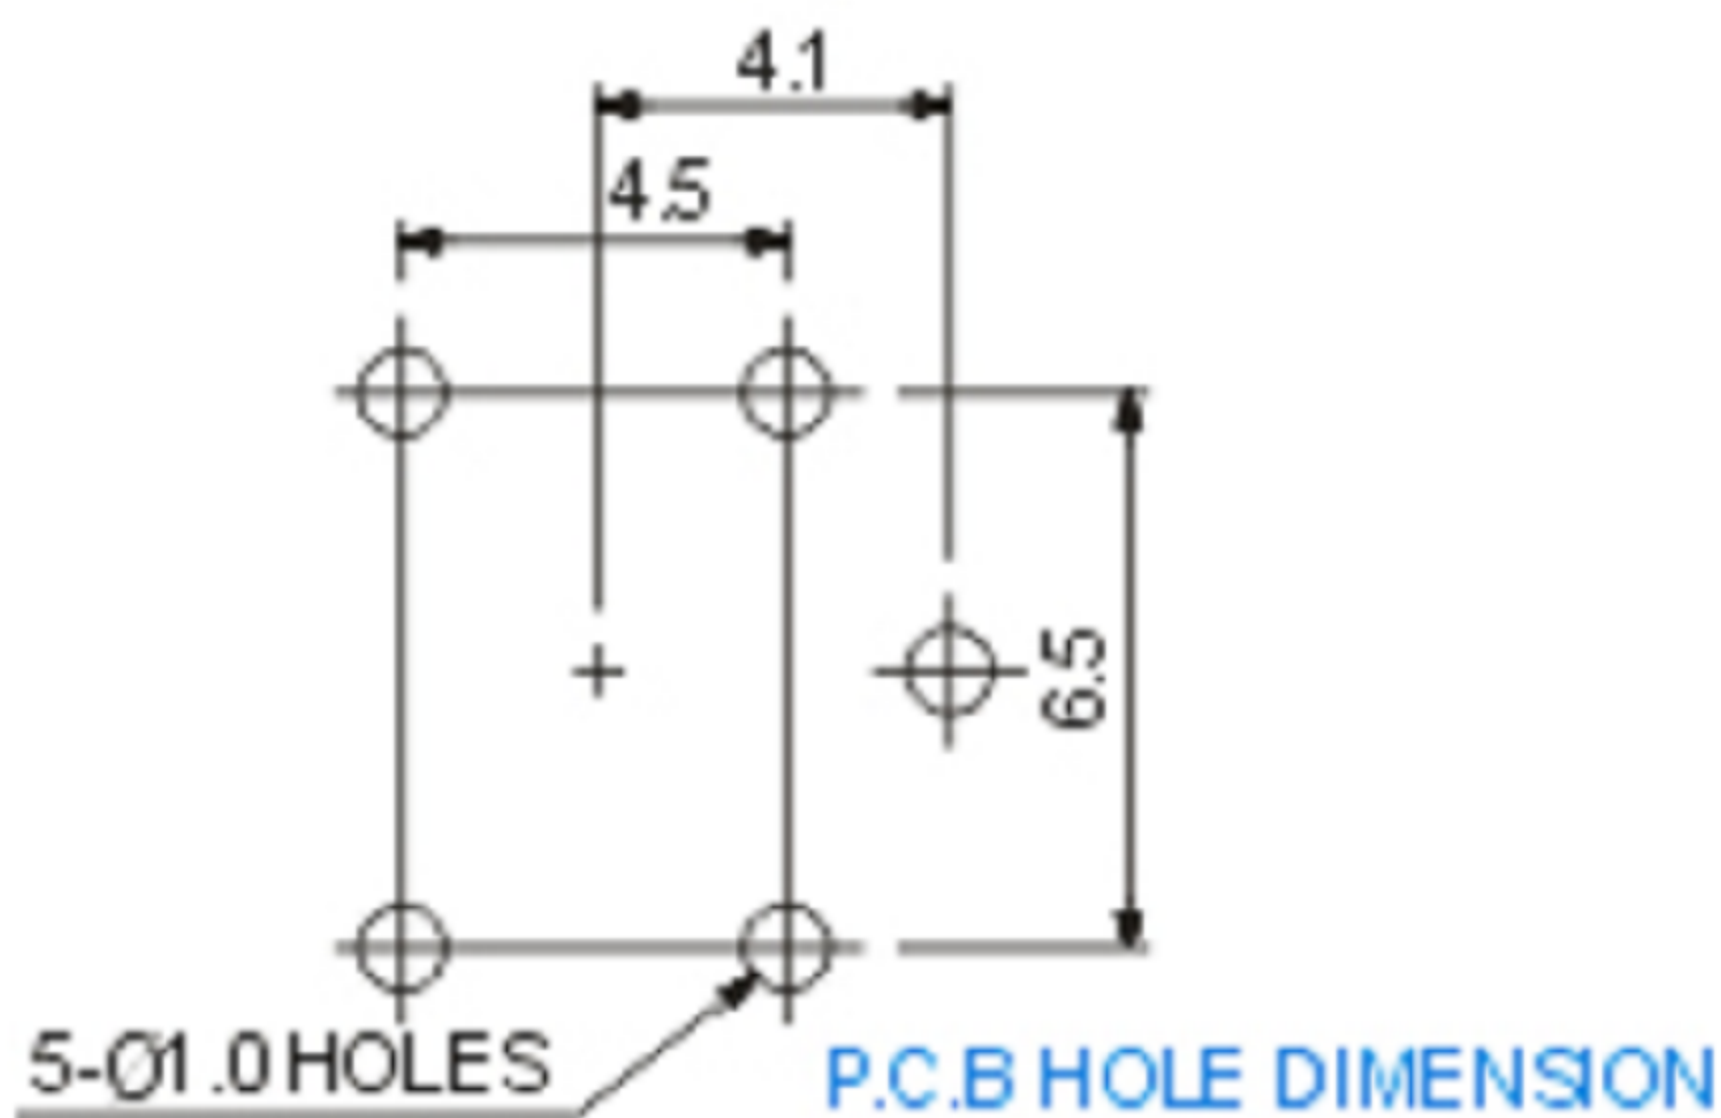
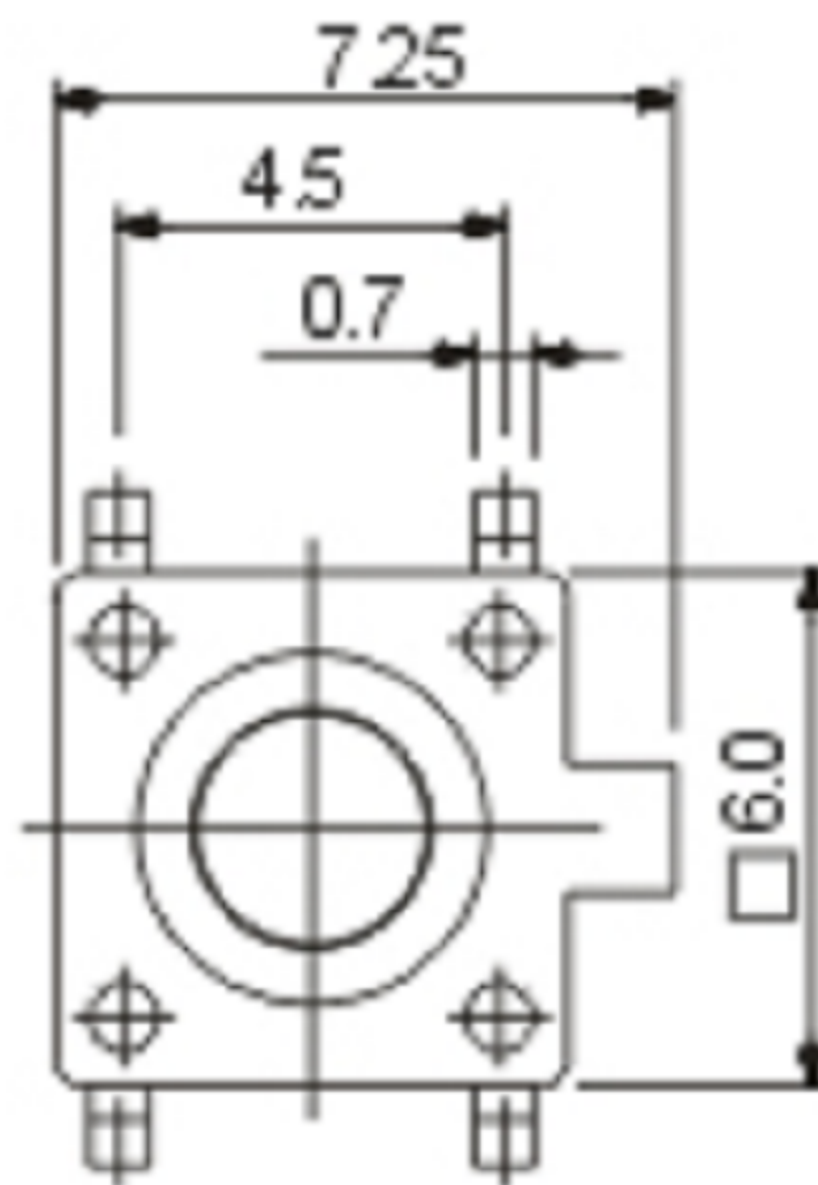


CAD FILE:

ROHS

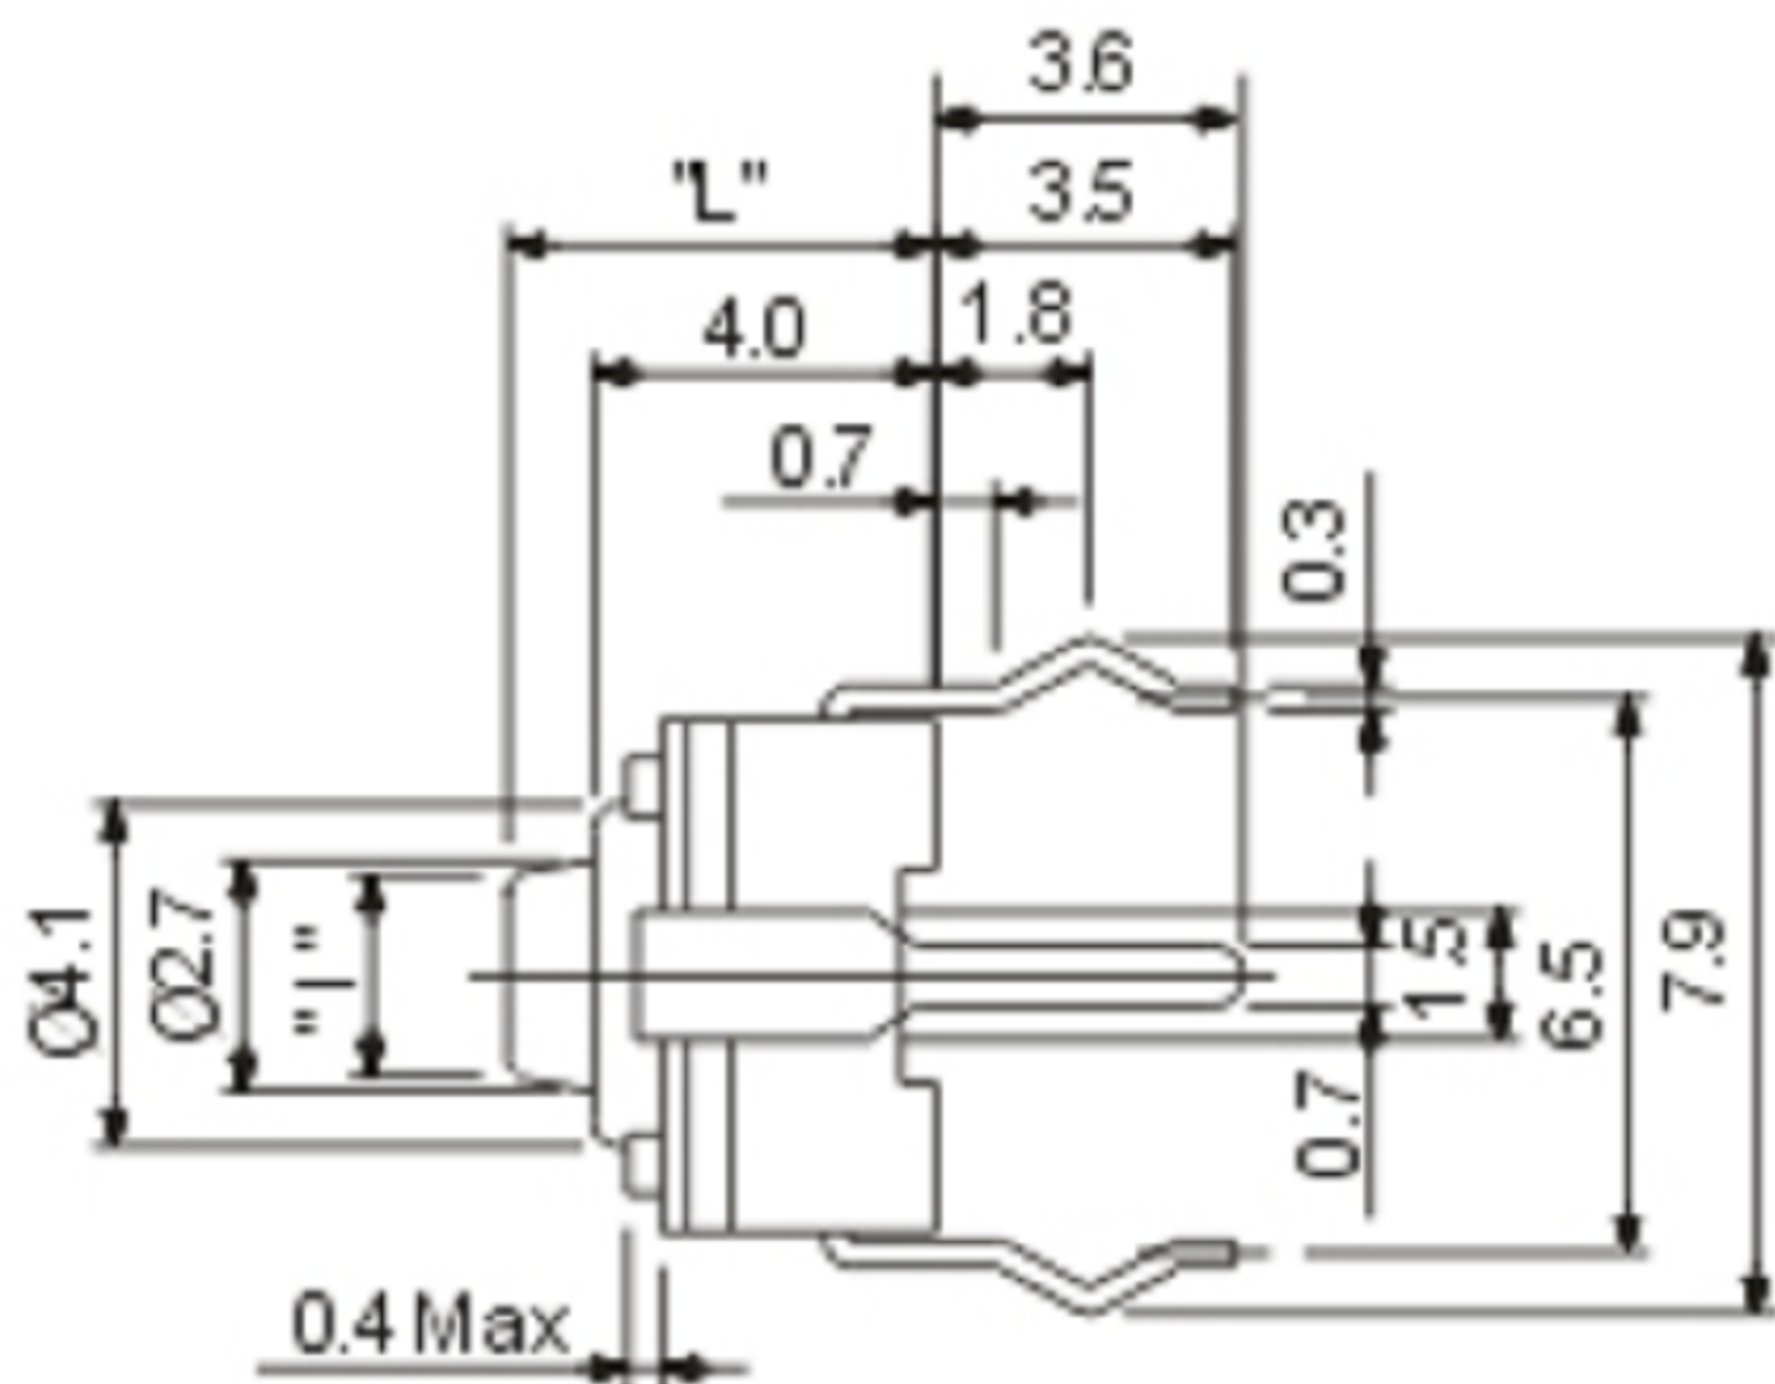

CIRCUIT DIAGRAM

1. Contact : Mechanical Contact
2. Travel : 0.35 ± 0.2 mm
3. Operating Force : 160 ± 50 gf, 250 ± 50 gf
4. Life : 100,000 Cycles Min.
5. Contact Resistance : $30\text{m}\Omega$ Max.
6. Stem Color: Black
7. L6.0mm 8.0mm

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Tact Switch			UNIT : mm	DRWG NO.: XB-TS-1232
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-1232			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					