


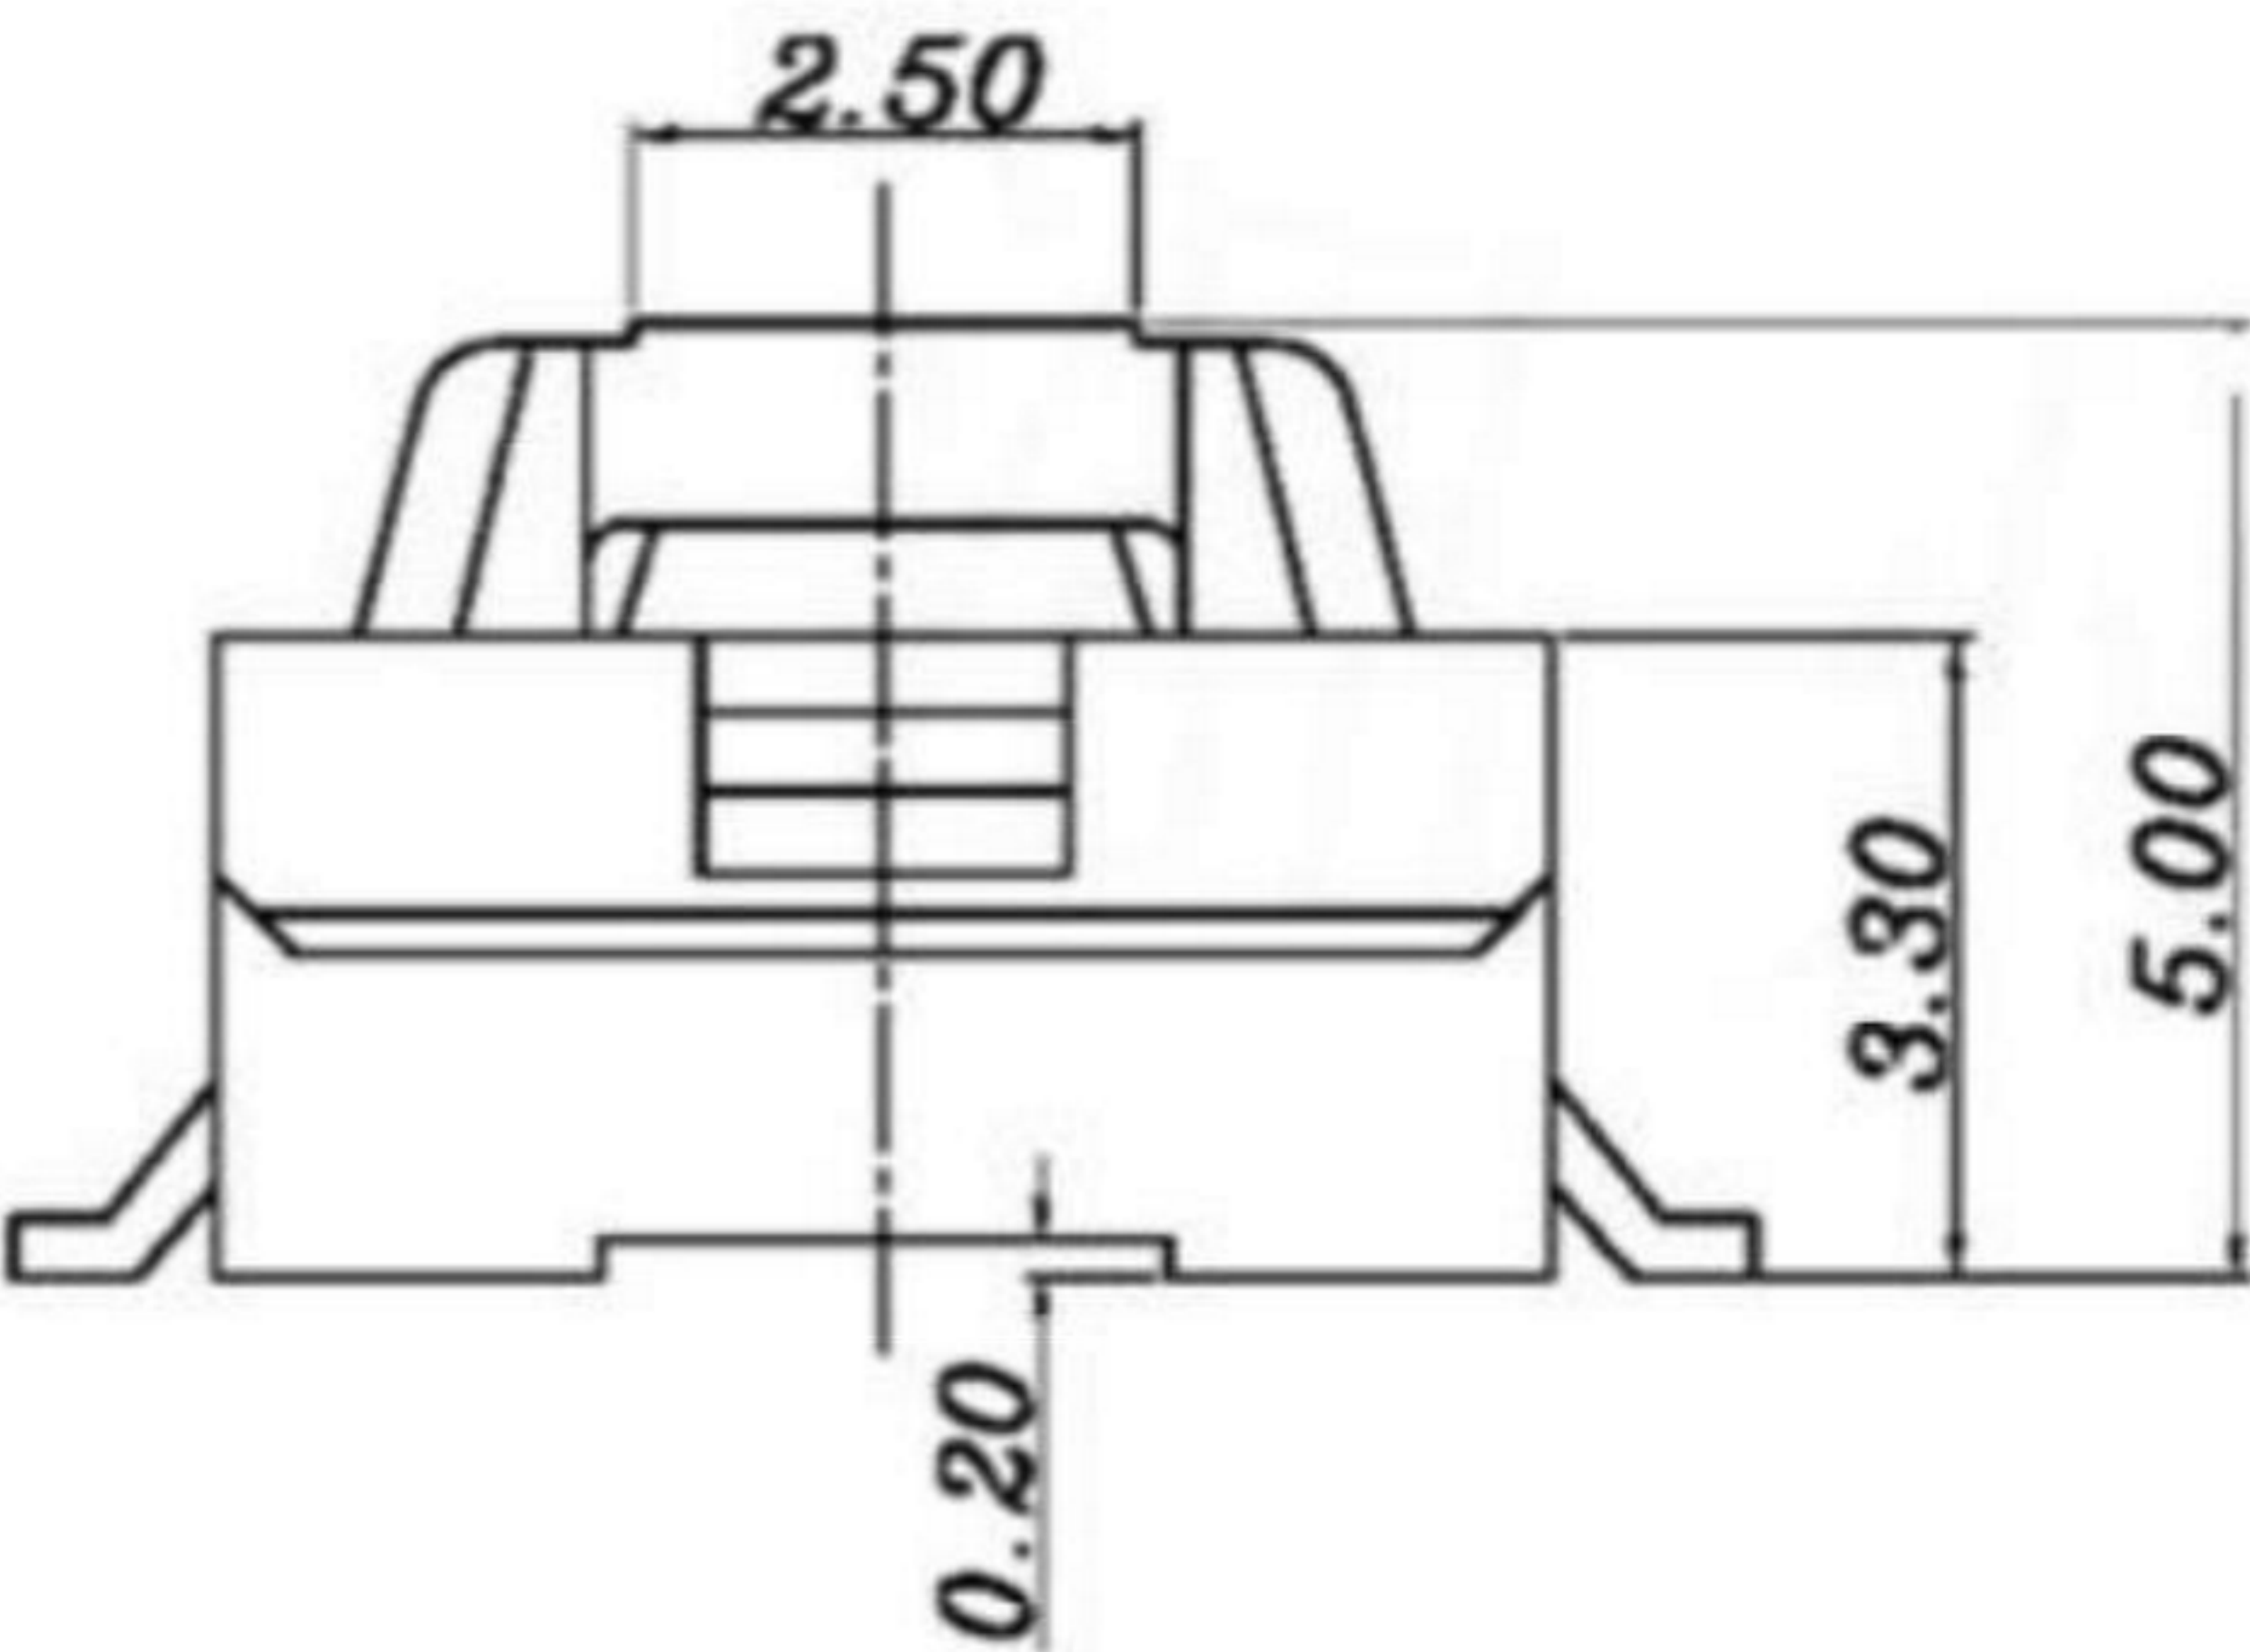


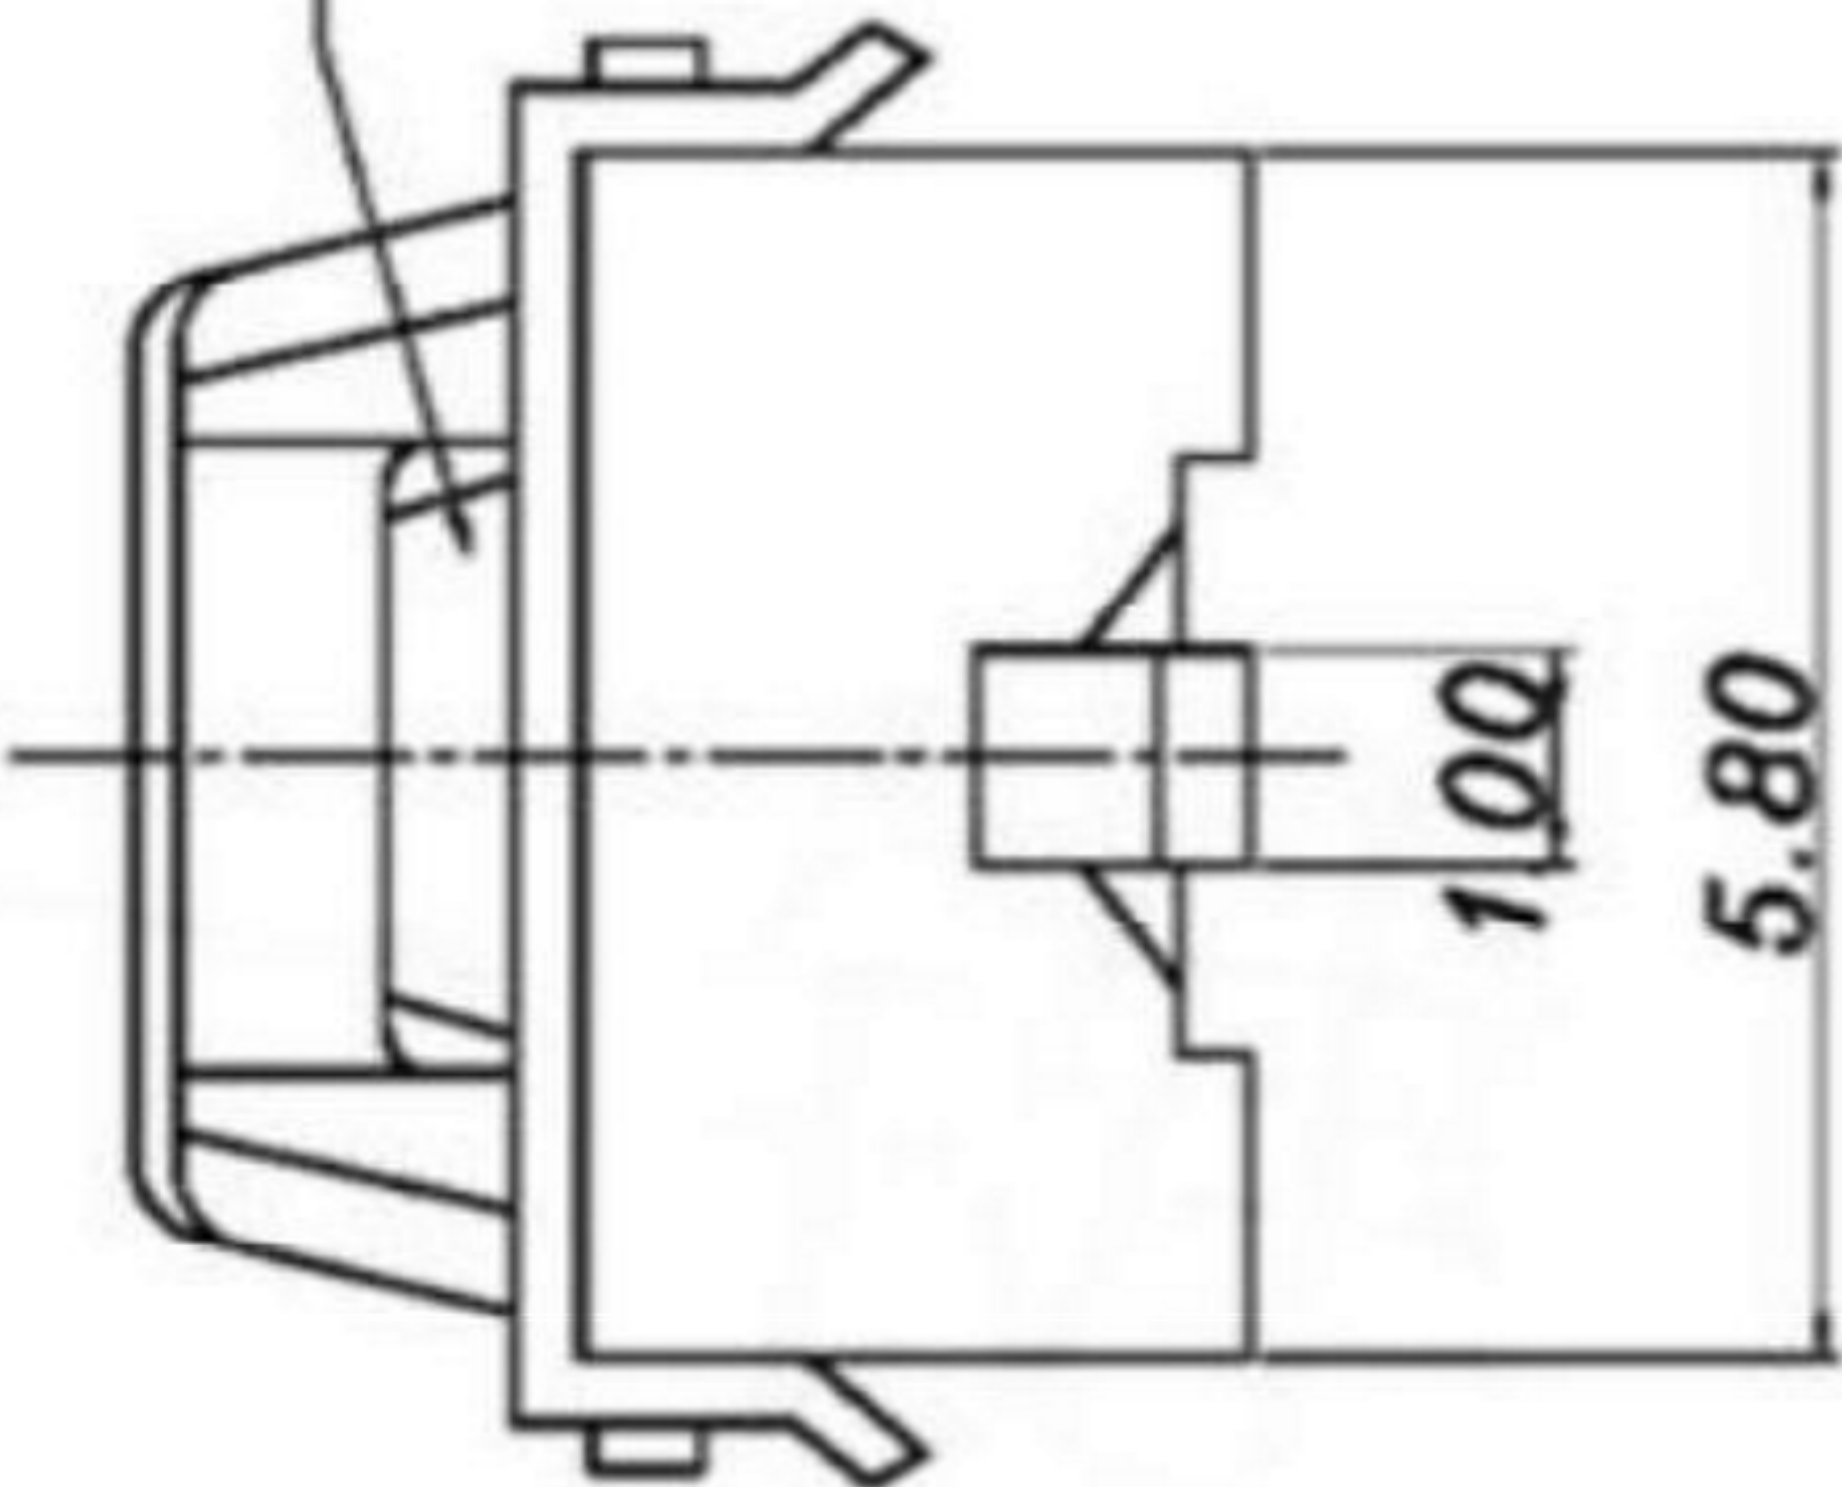

Rubber dome

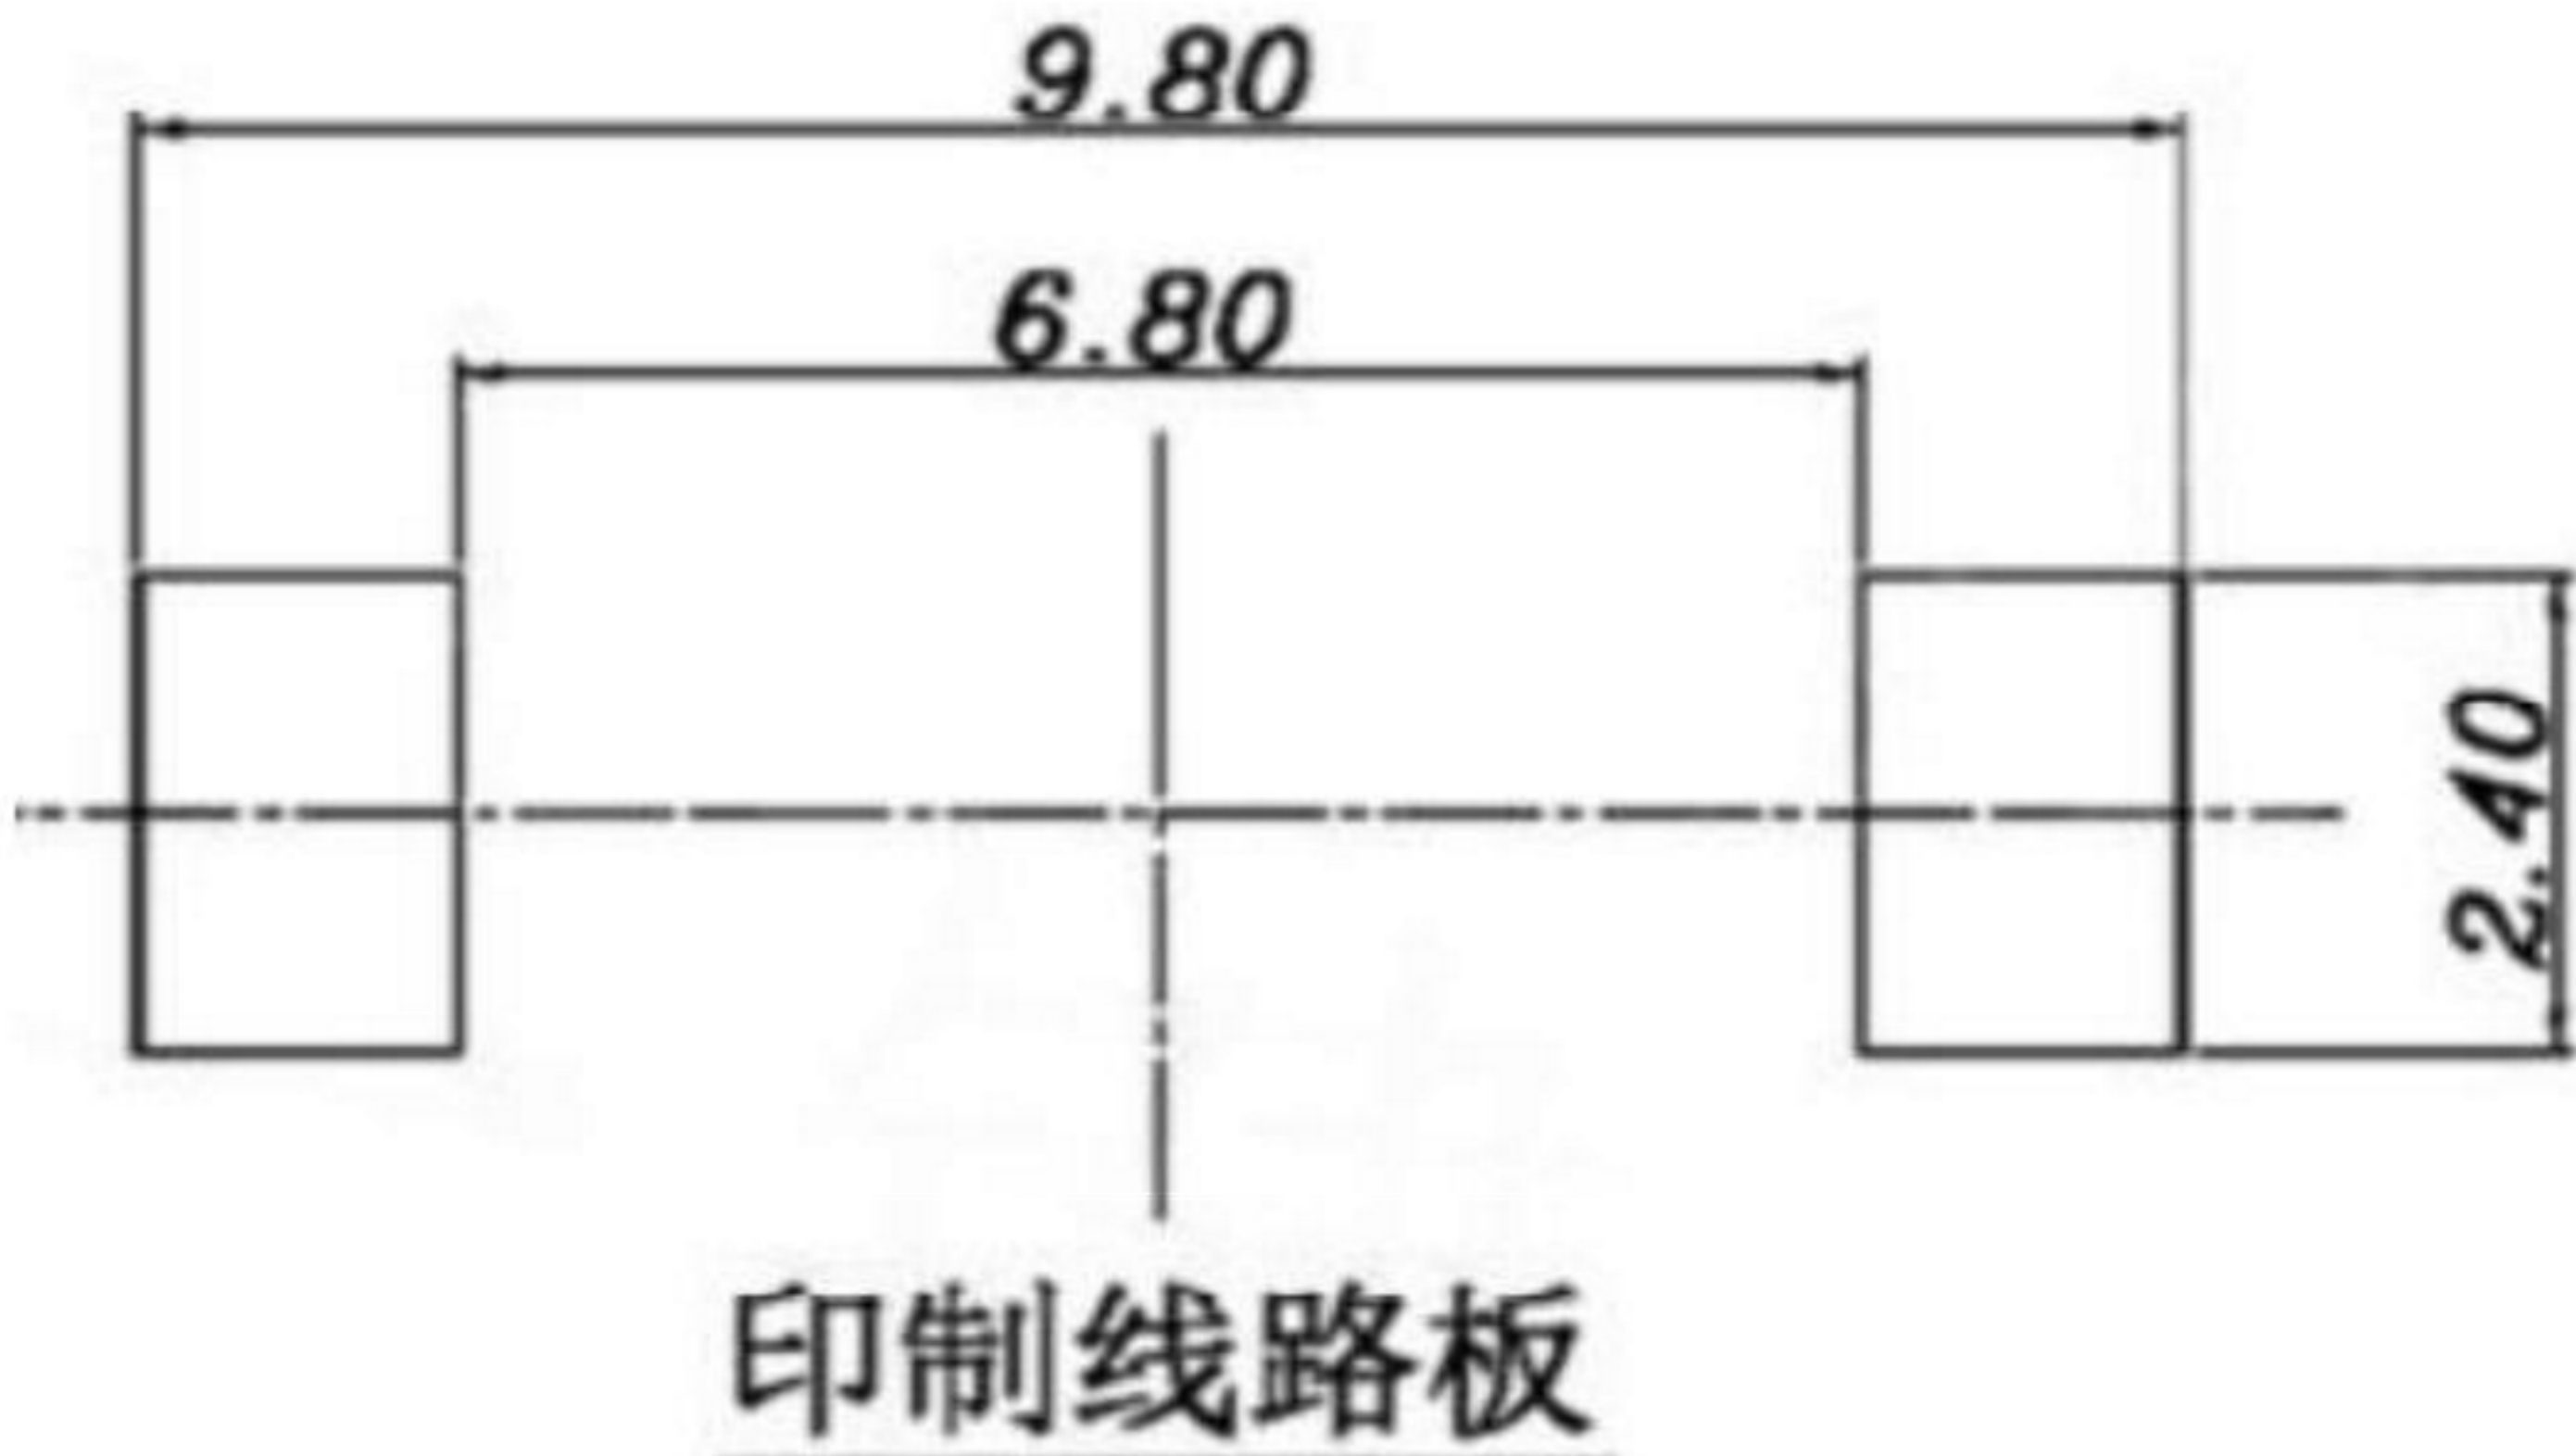

工作方式:	瞬时接触	
接触方式:	单刀单投掷, 常开	
安装方式:	直立无声贴片	
额定电负荷:	50mA,DC12V	
接触电阻:	≤50mΩ	≤100mΩ
绝缘电阻:	≥100m	
绝缘强度:	AC250V for 1 Minute	
行程:	0.25mm±0.1mm	

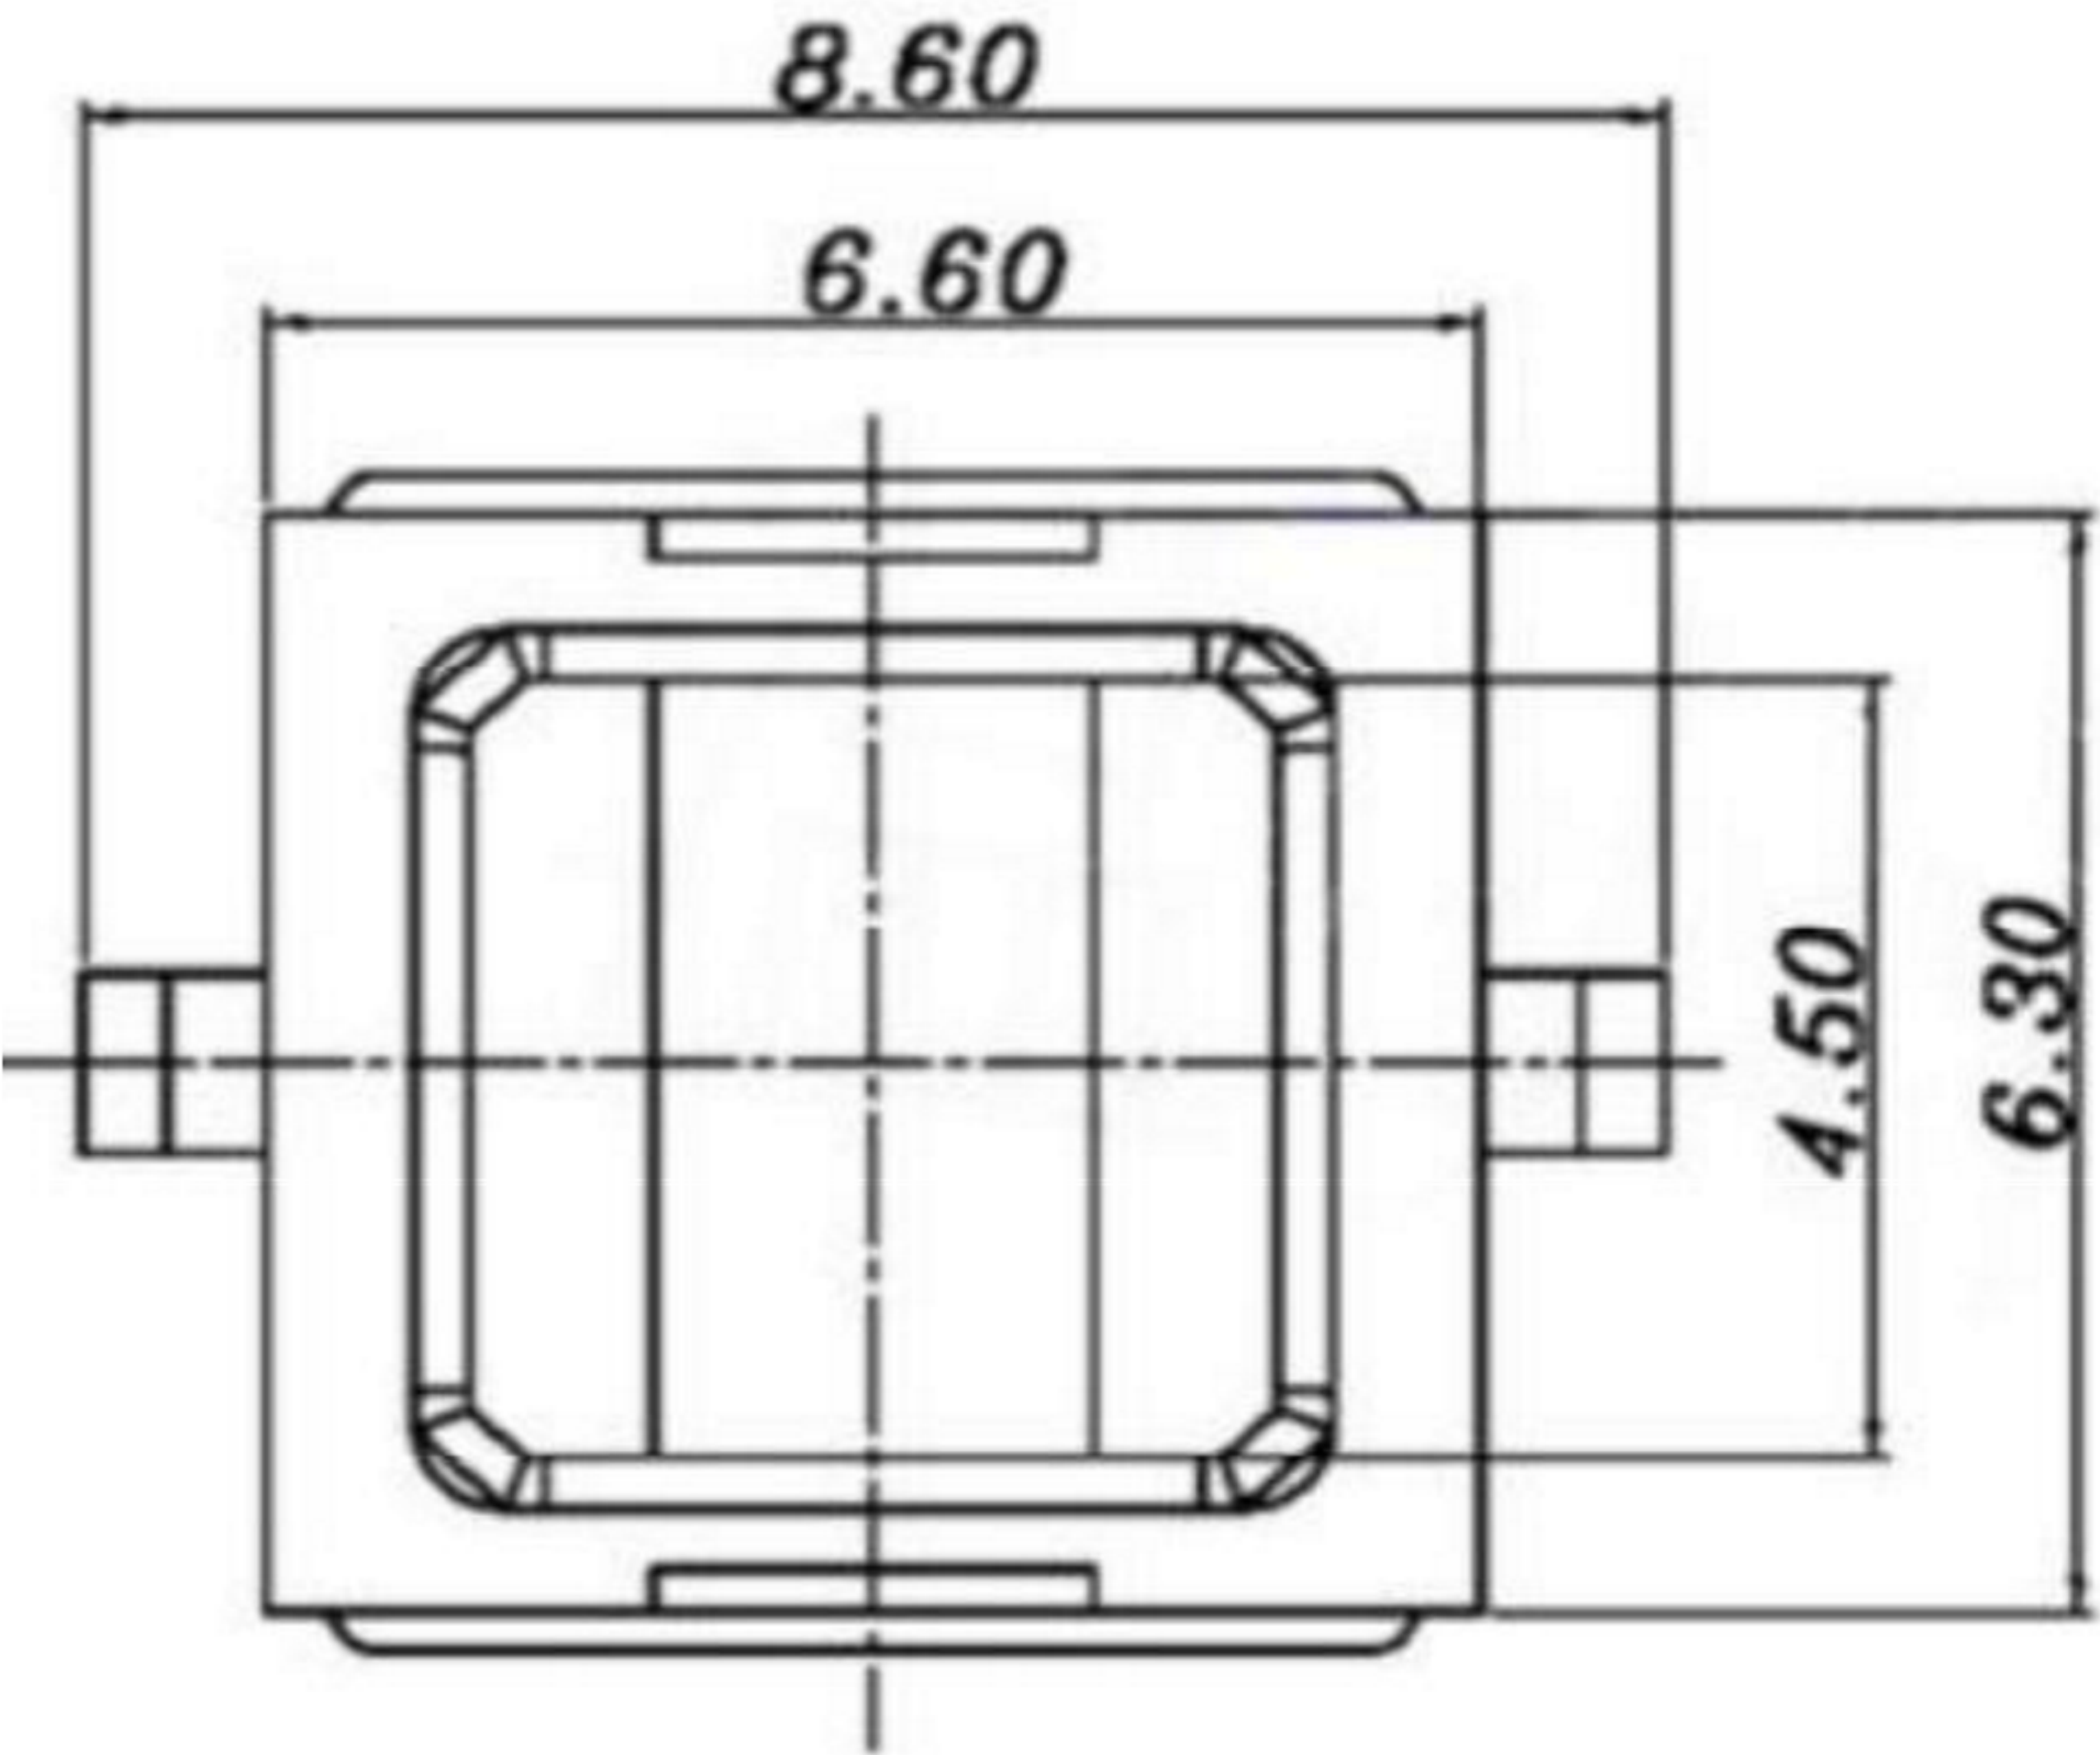

注：“*”表示关键尺寸(4个).

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-1199S	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL:				CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK					APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.					