

NOTE:

1.MATERIAL:

a.HOUSING:PPA

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:



a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION

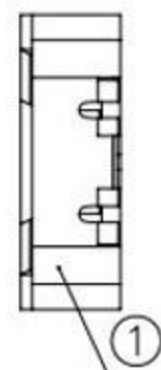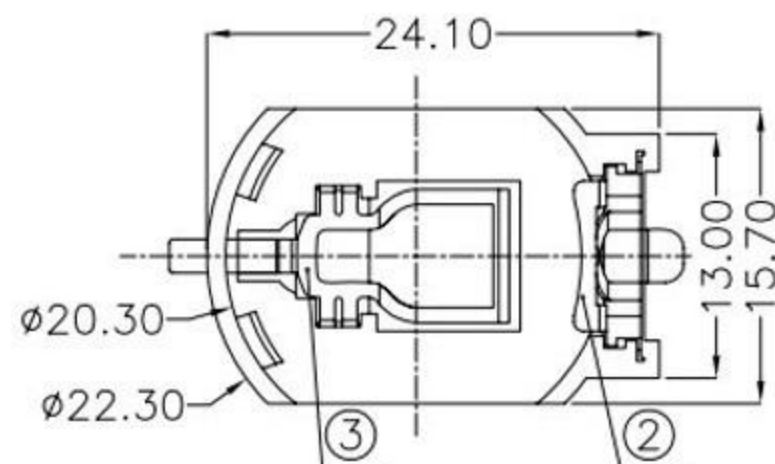

电池座系列

SMT 180° TYPE

PLATING:

A-Au1u"

J-Ni100U"~120U"

K-Sn100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK

4A-LCP WHITE

4B-LCP BLACK

PCB Layout Diagram
Top View

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.30 X :±1°
X.X :±0.25 X.X :±0.5°
X.XX :±0.20
X.XXX :±0.10

WEIGHT: 0.86g

SHEET 1 OF 1



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

DSND DATE 2017-06-28

CHKD DATE 2017-06-28

APVD DATE 2017-06-28

SCALE: 2:1 SIZE: A4 VIEW: ② ③

UNIT: mm REV.: A/0 OBJECT: MY

TITLE:

PART NO.:

DRAW NO.:

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR