
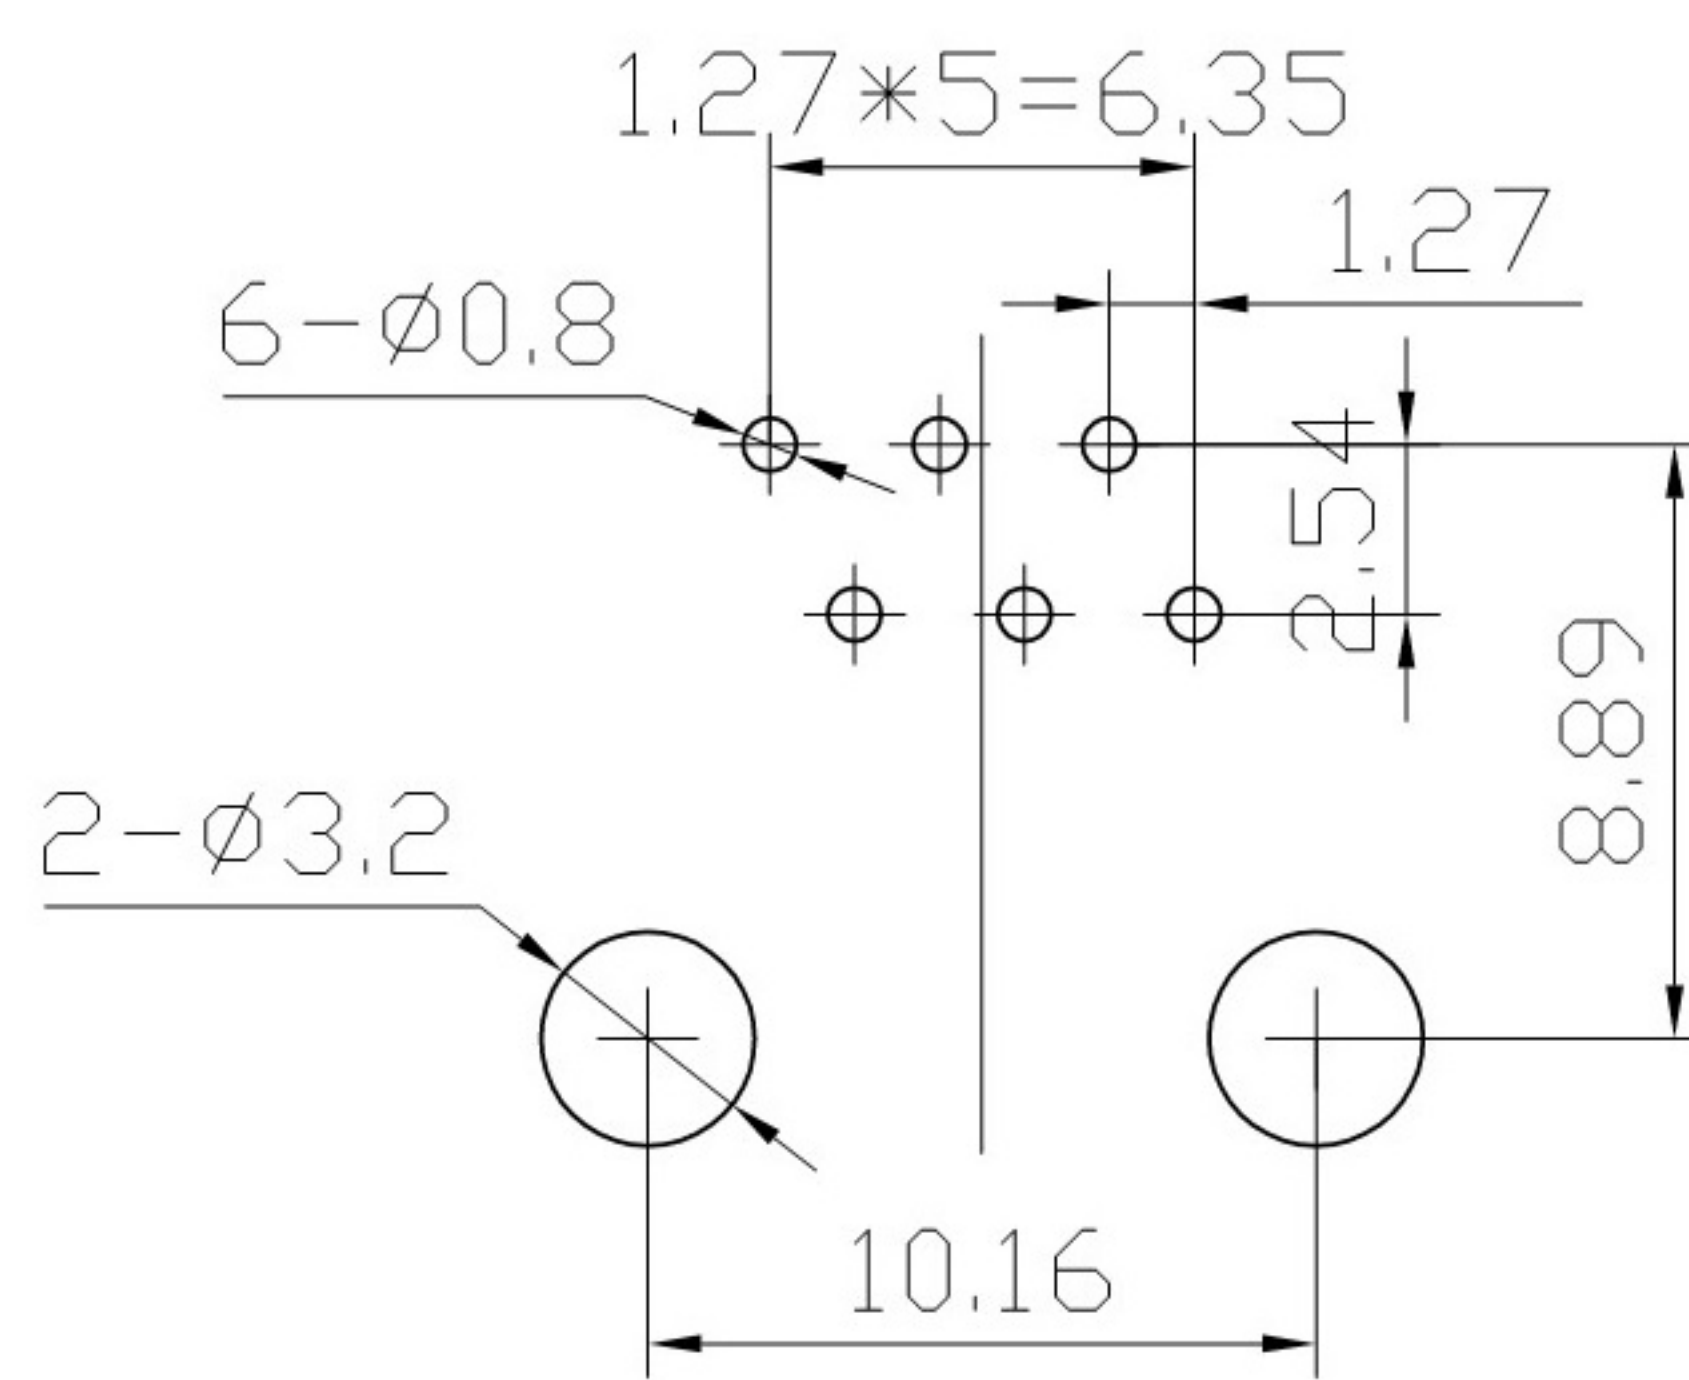
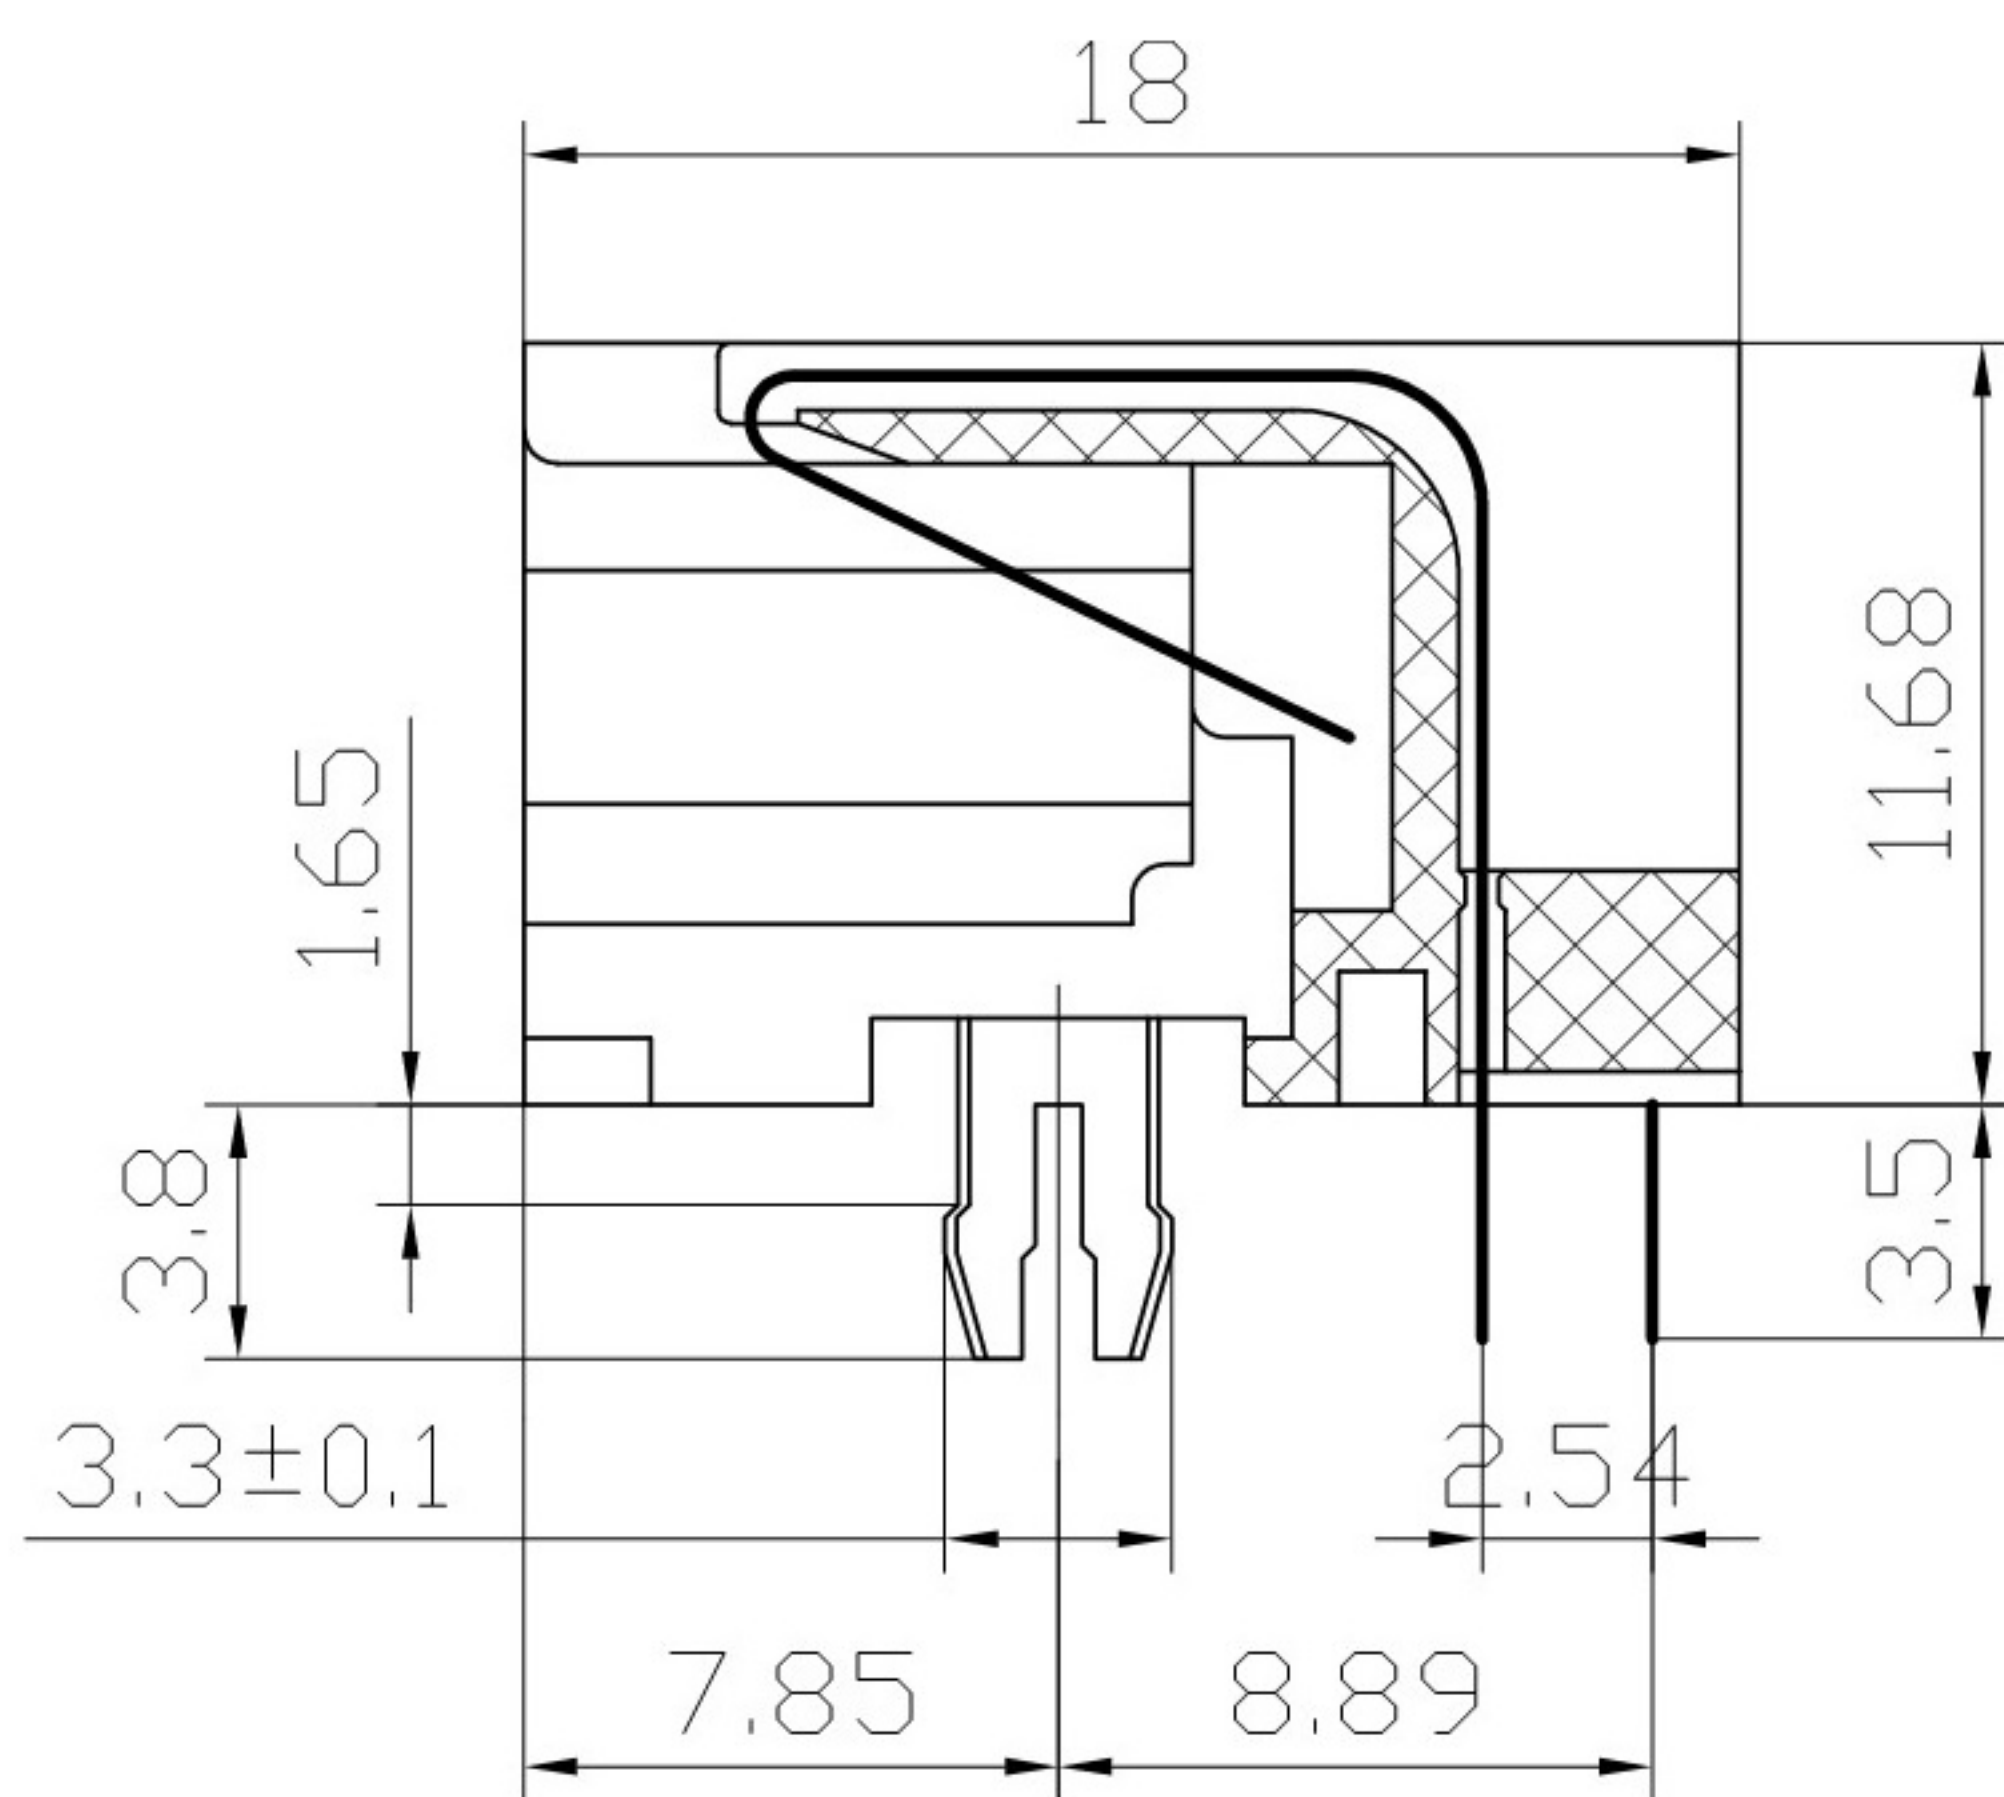
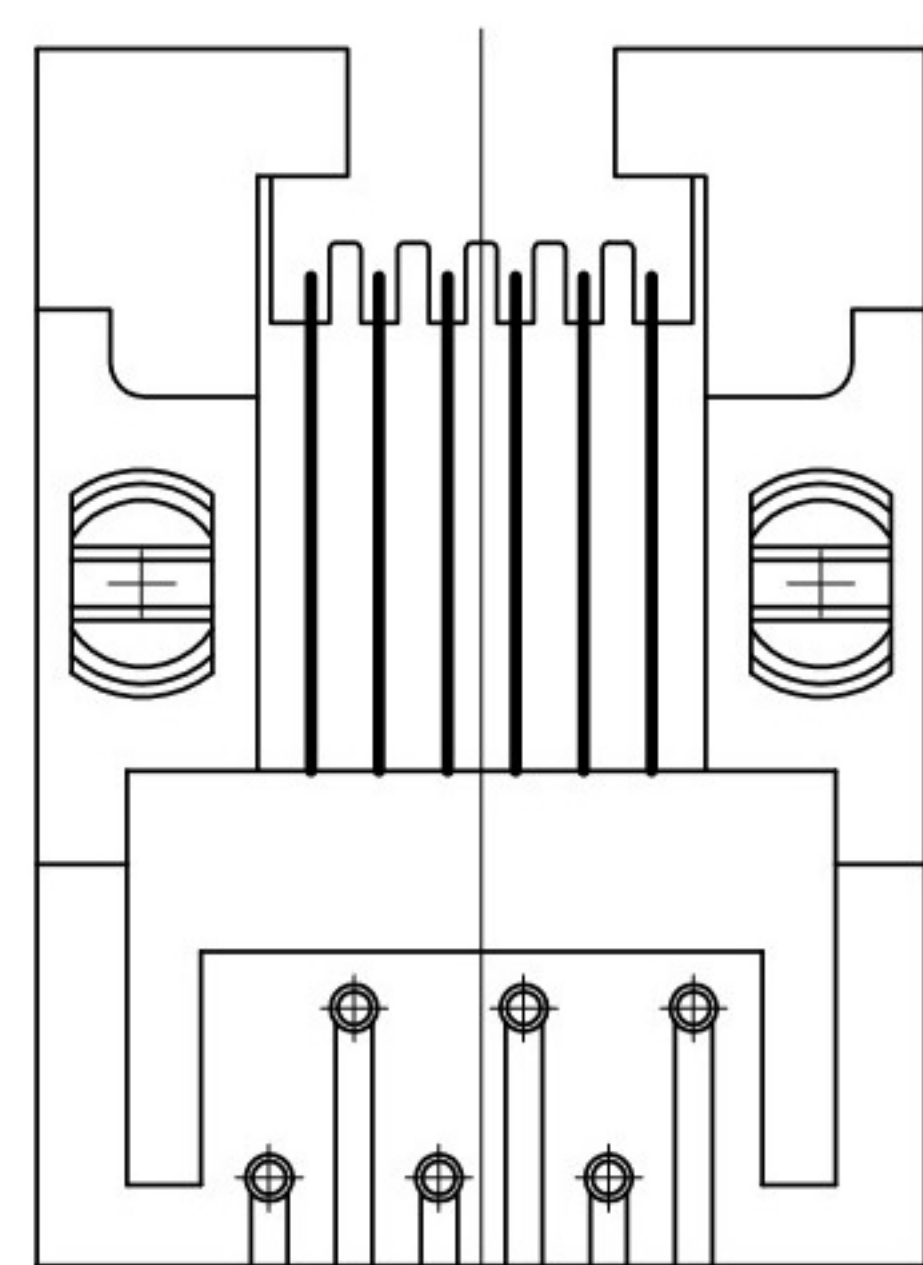


RoHS

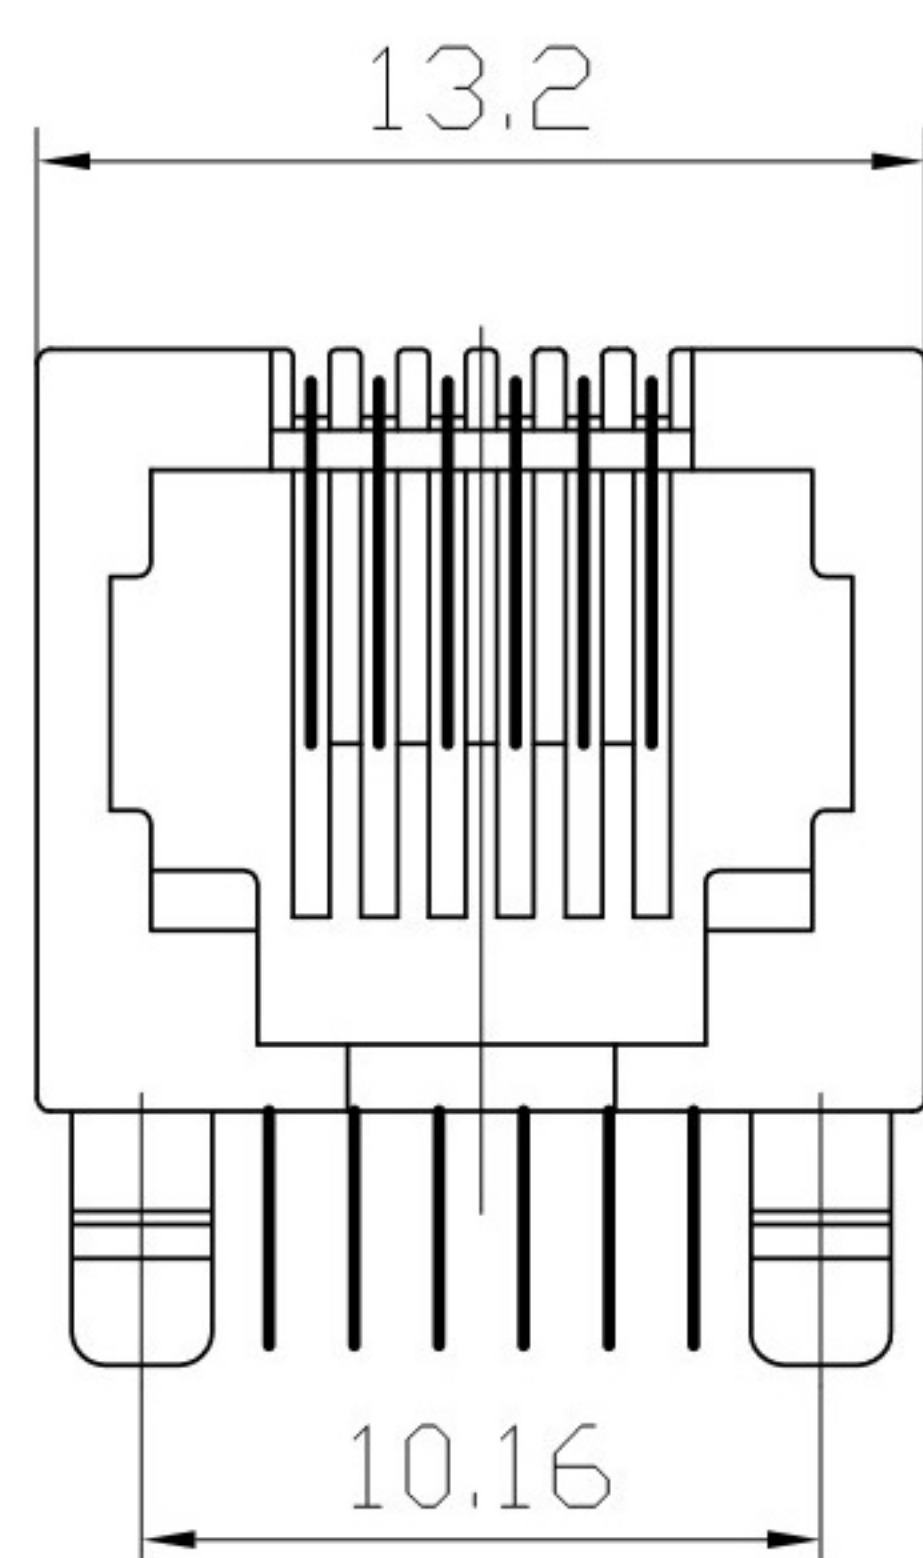

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL :PHOSPHOR BRONZE t=0.35mm.
3.PLATING : GOLD PLATING 3u"~50u"OVER NICKEL

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
2.CURRENT RATING :1.5 AMP.
3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY: :750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40°C TO 85°C.
2.OPERATION : 0°C TO 70°C.

PART NUMBER:

53A SERIES JACK		ZP53A	6	X - X	X	X	X	X
POSITIONS	CONTACTS	SHIELD	HOUSING PEG	PLASTIC	LOGO	GOLD PLATING		
4-4 POSITIONS	2-2 CONTACTS	0-W/O SHIELD	1-SPLIT LONG	1-PBT	0-W/O LOGO	1-15u"		
6-6 POSITIONS	4-4 CONTACTS	1-W/ SHIELD	2-SPLIT SHORT	2-NYLON66	1-W/ ZPY	2-3u"		
8-8 POSITIONS	6-6 CONTACTS			3-NYLON46	2-W/ UL	3-6u"		
	8-8 CONTACTS			4-ABS	3-W/ ZPY&UL	4-15u"		
						5-30u"		
						6-50u"		

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0

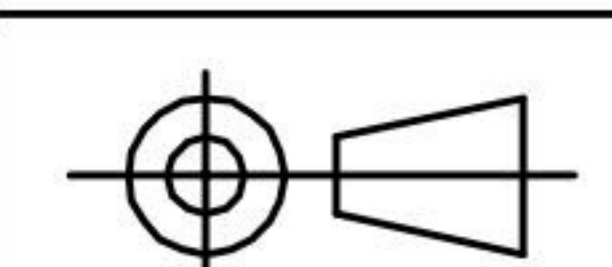

GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu