
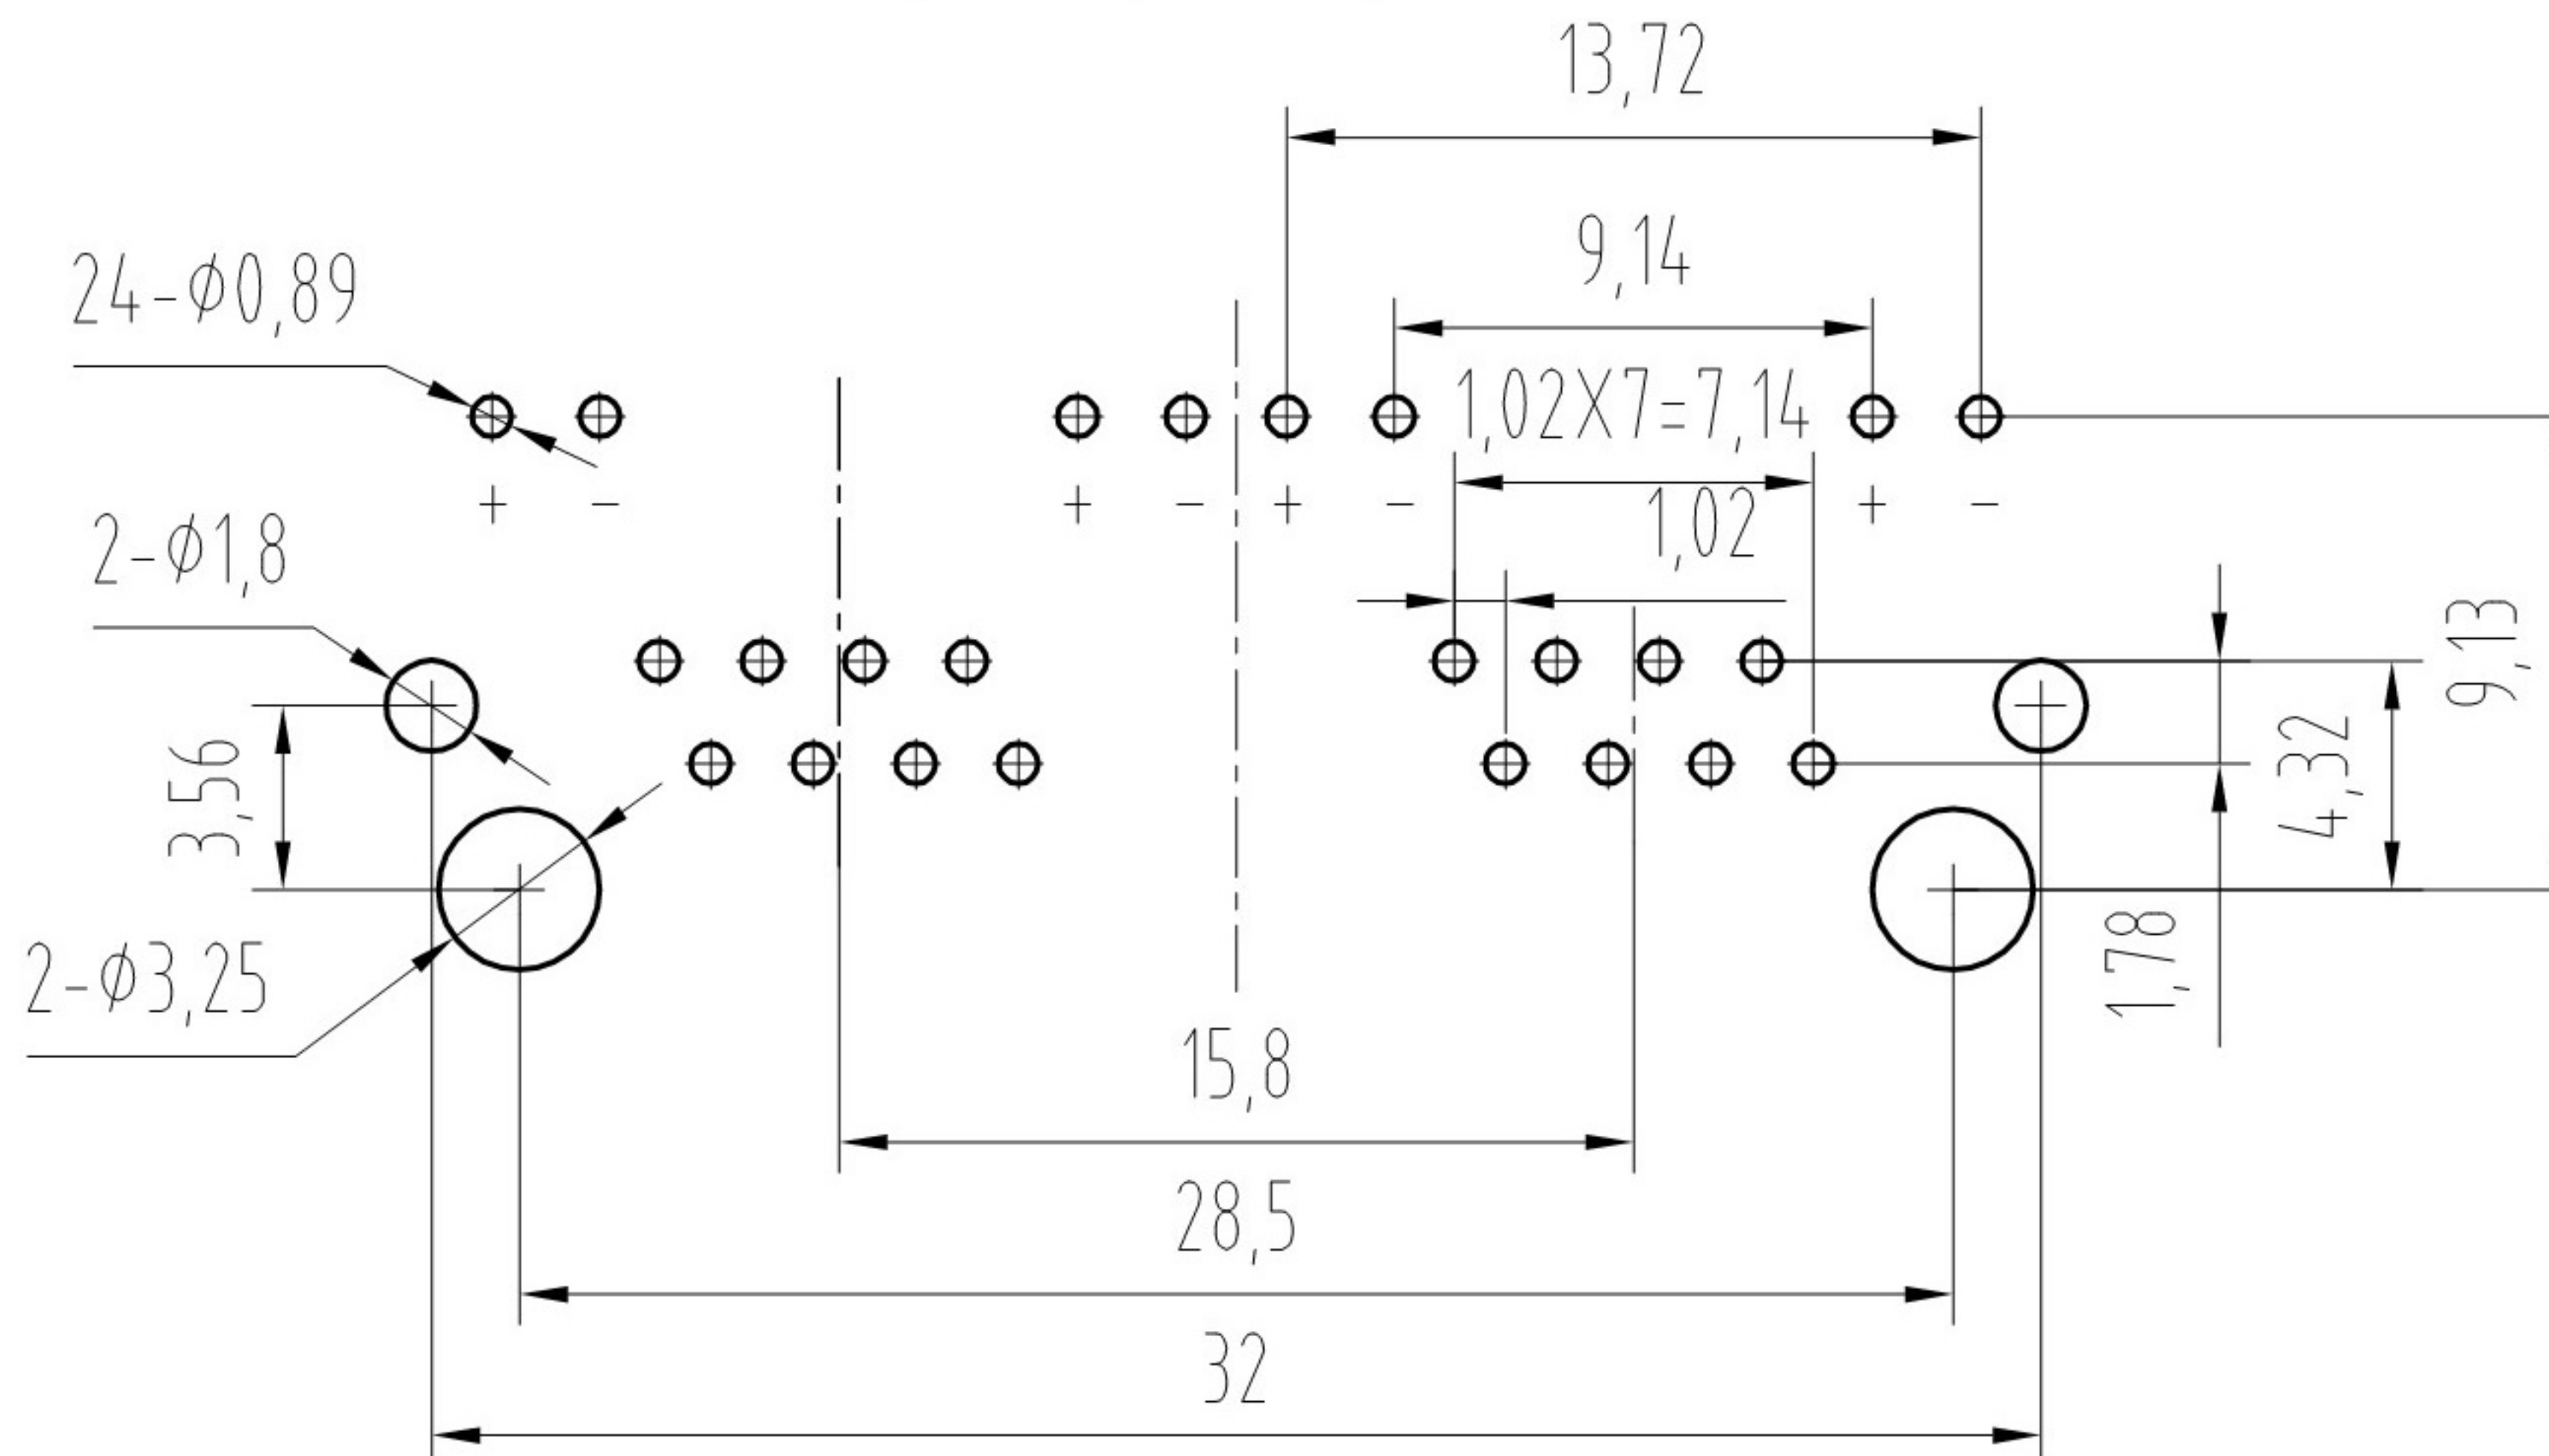
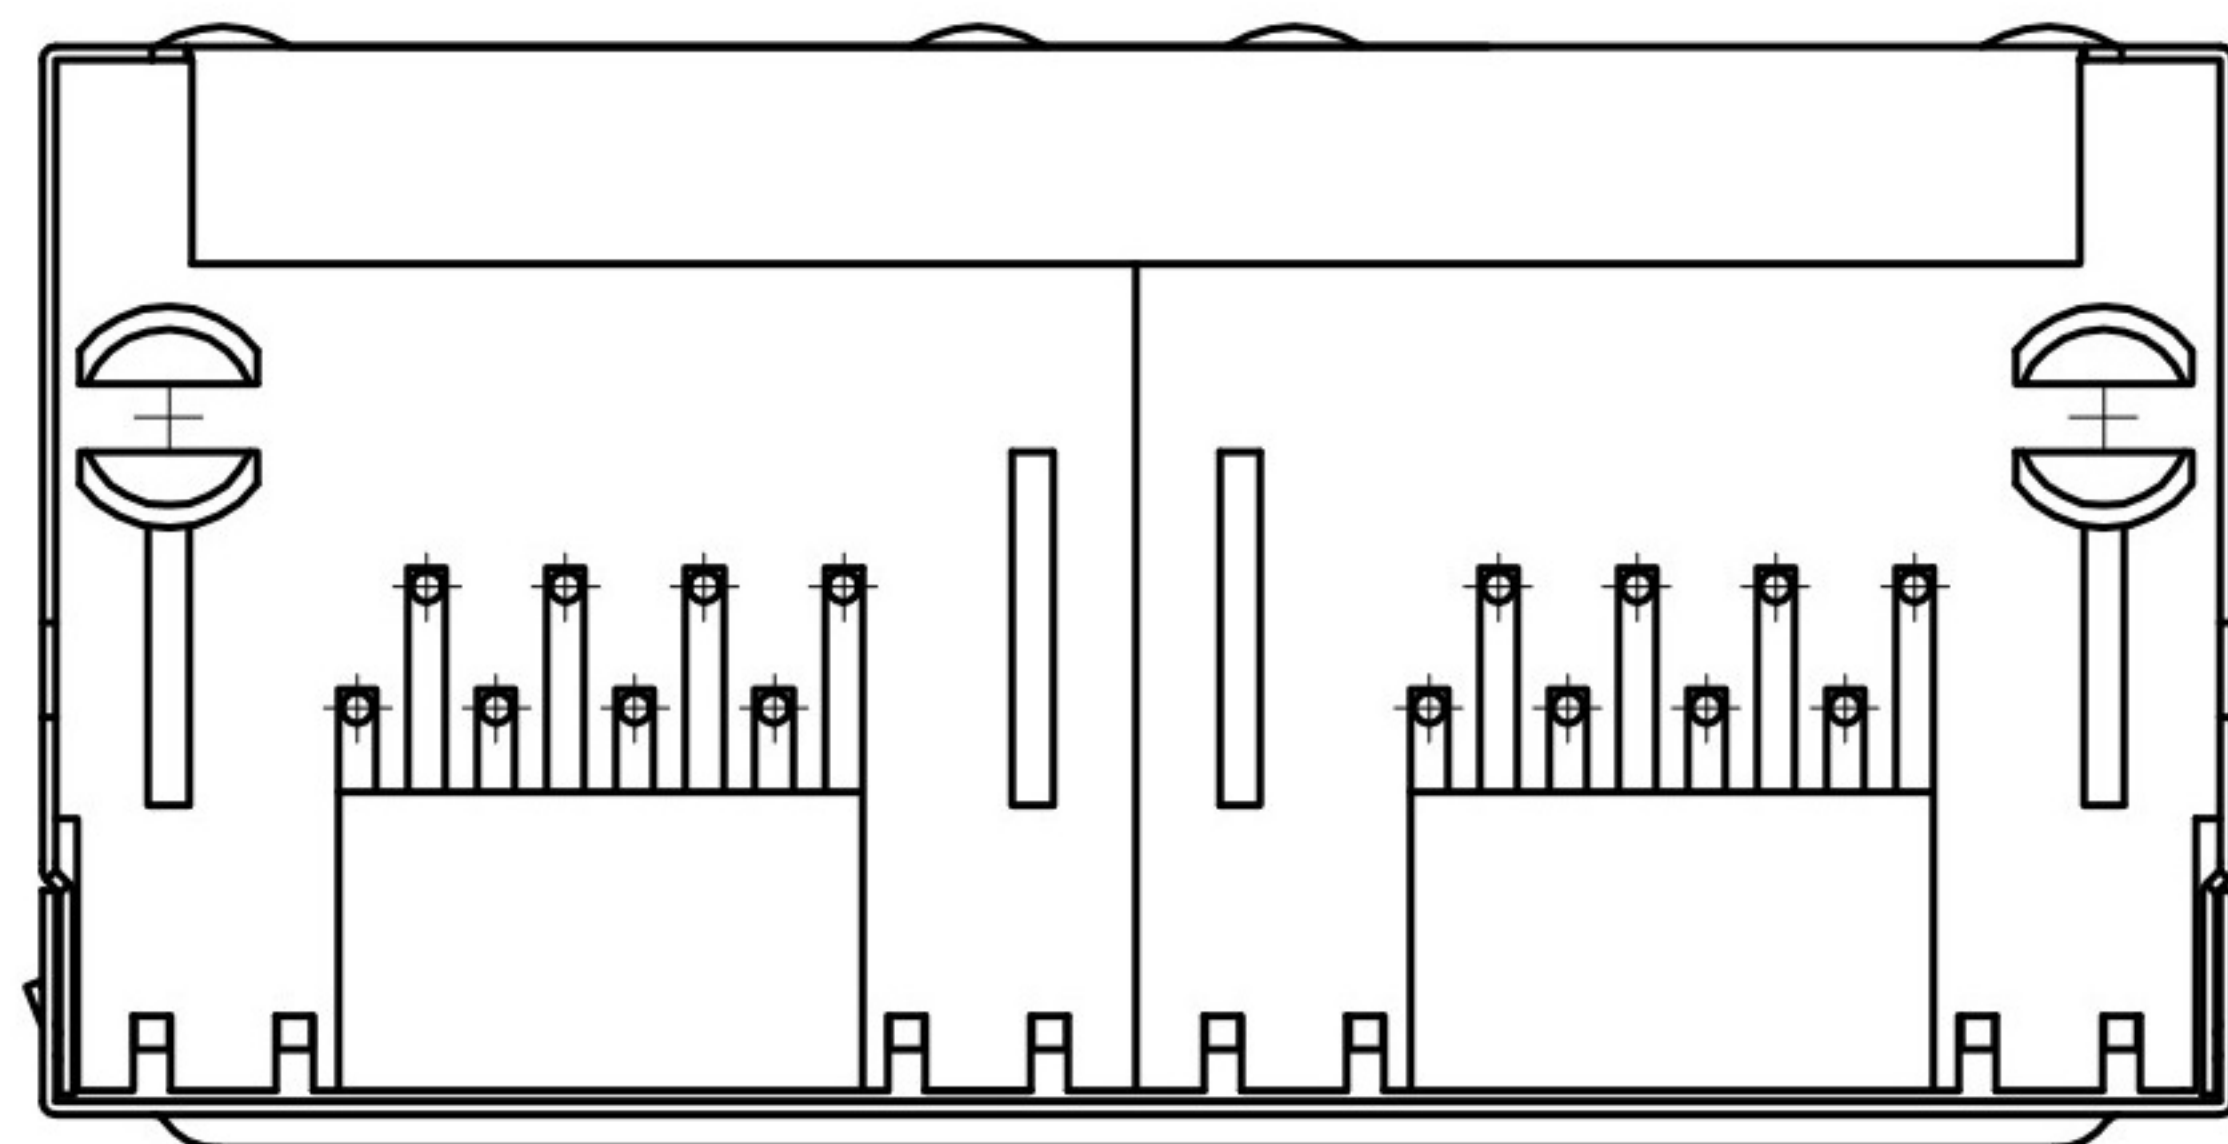
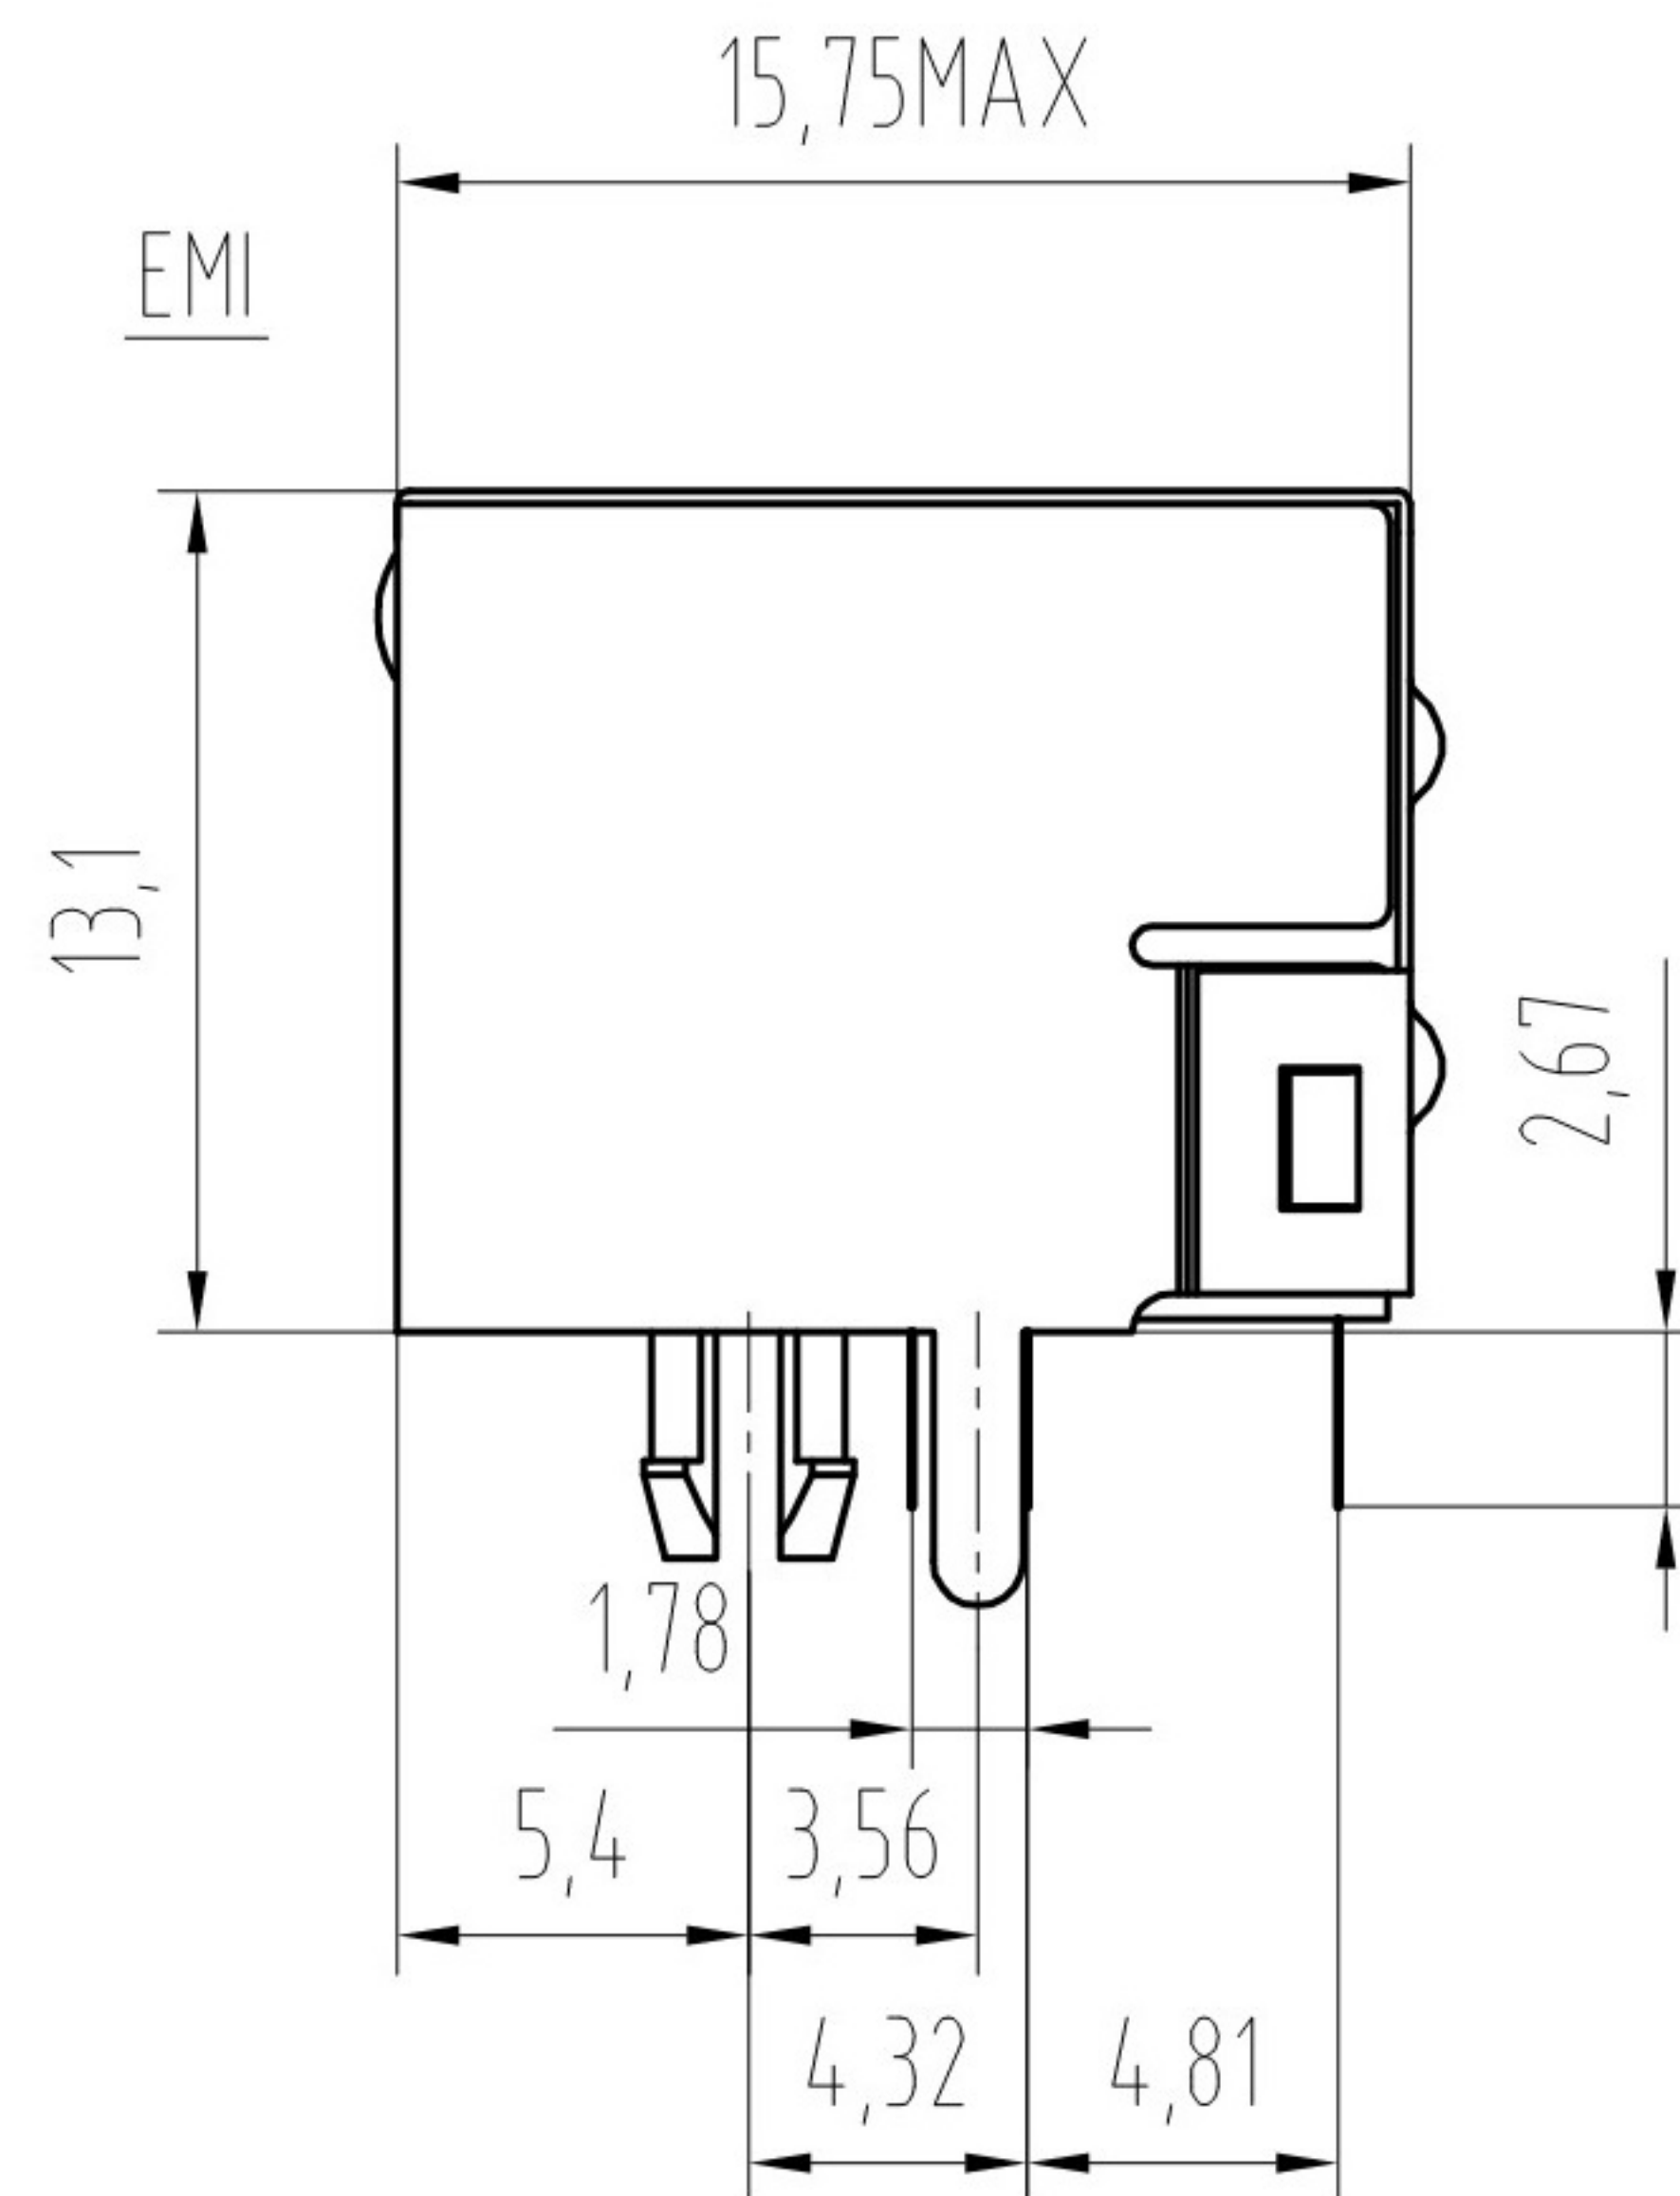


RoHS

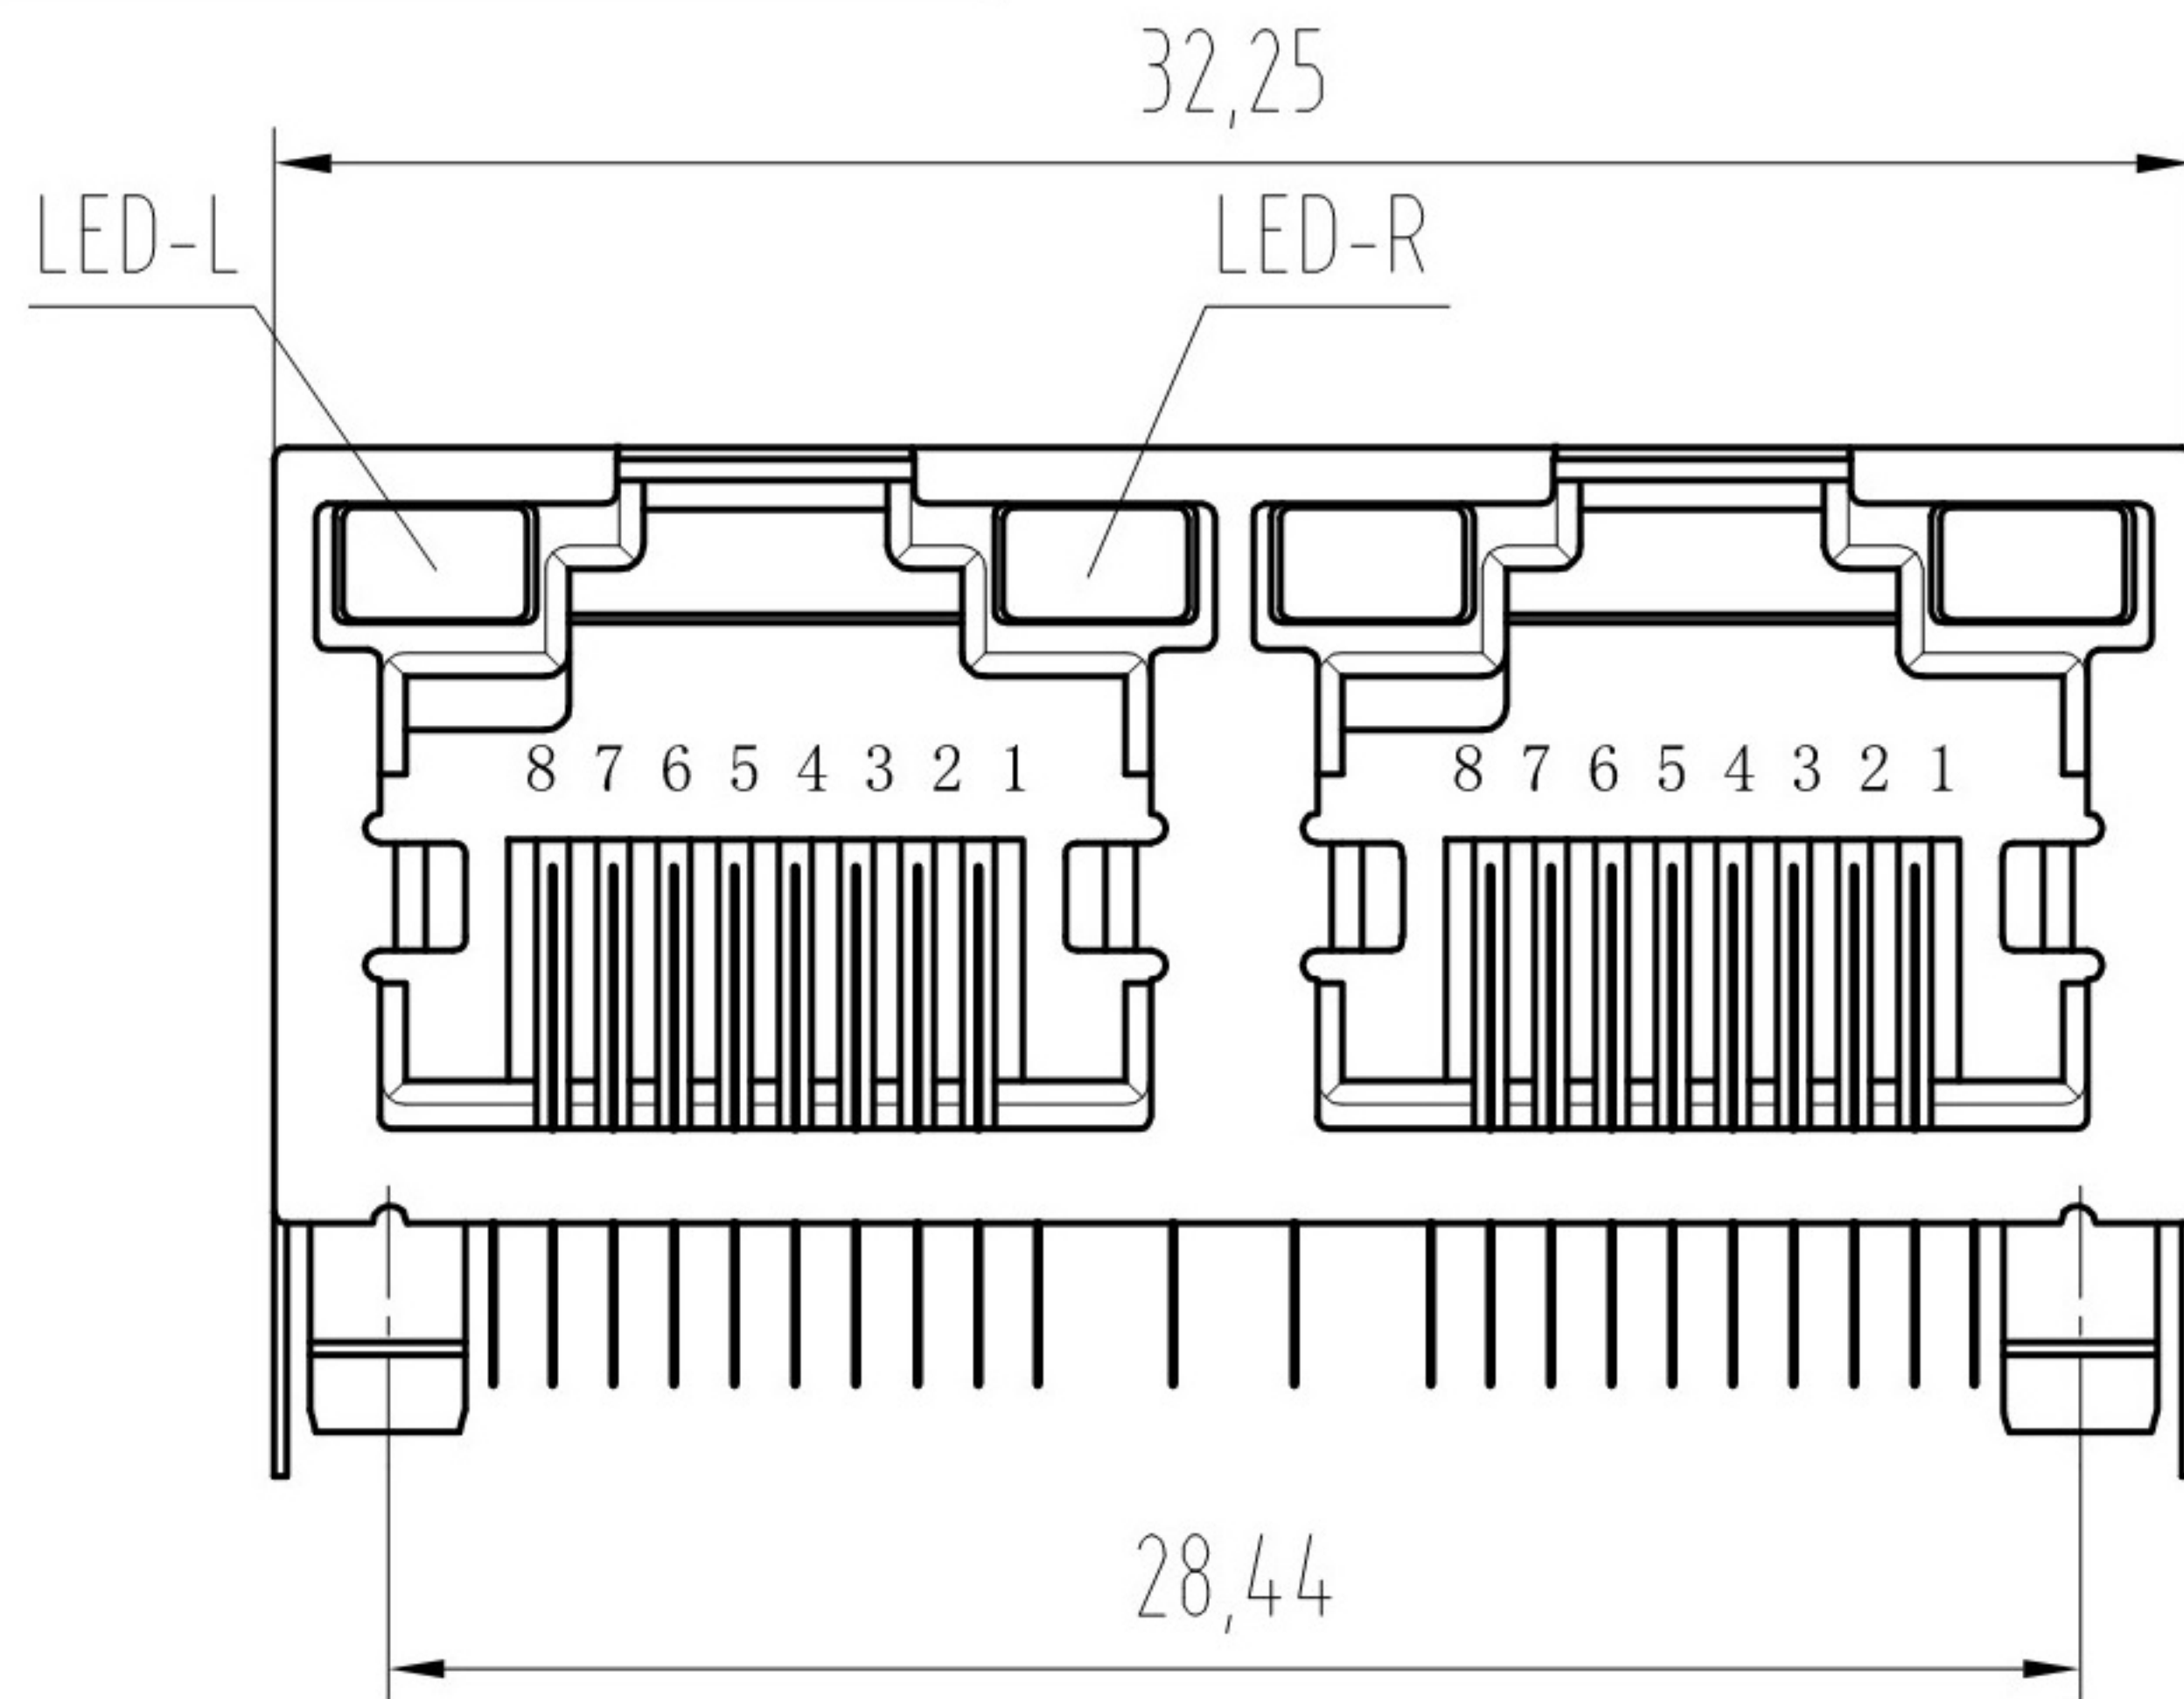

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- 1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE 60/40MM
- 3. PLATING: GOLD PLATING OVER NICKEL
- 4. SHIELD: 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED
- 5. LED: OPTION

ELECTRICAL:

- 1. VOLTAGE RATING: 125 VAC RMS
- 2. CURRENT RATING: 1.5 AMP
- 3. CONTACT RESISTANCE: 30 MILIOHMS MAX
- 4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC
- 5. DIELECTRIC WITHSTANDING RESISTANCE: 1000V AC RMS 50Hz 1MIN


MECHANICAL:

- 1. DURABILITY: 750 CYCLES MIN
- 2. PCB RETENTION PRE-SOLDER: 1 LB MIN

ENVIRONMENTAL:


- 1. STORAGE: -40°C~+35°C
- 2. OPERATION: 0°C~70°C

PART NUMBER

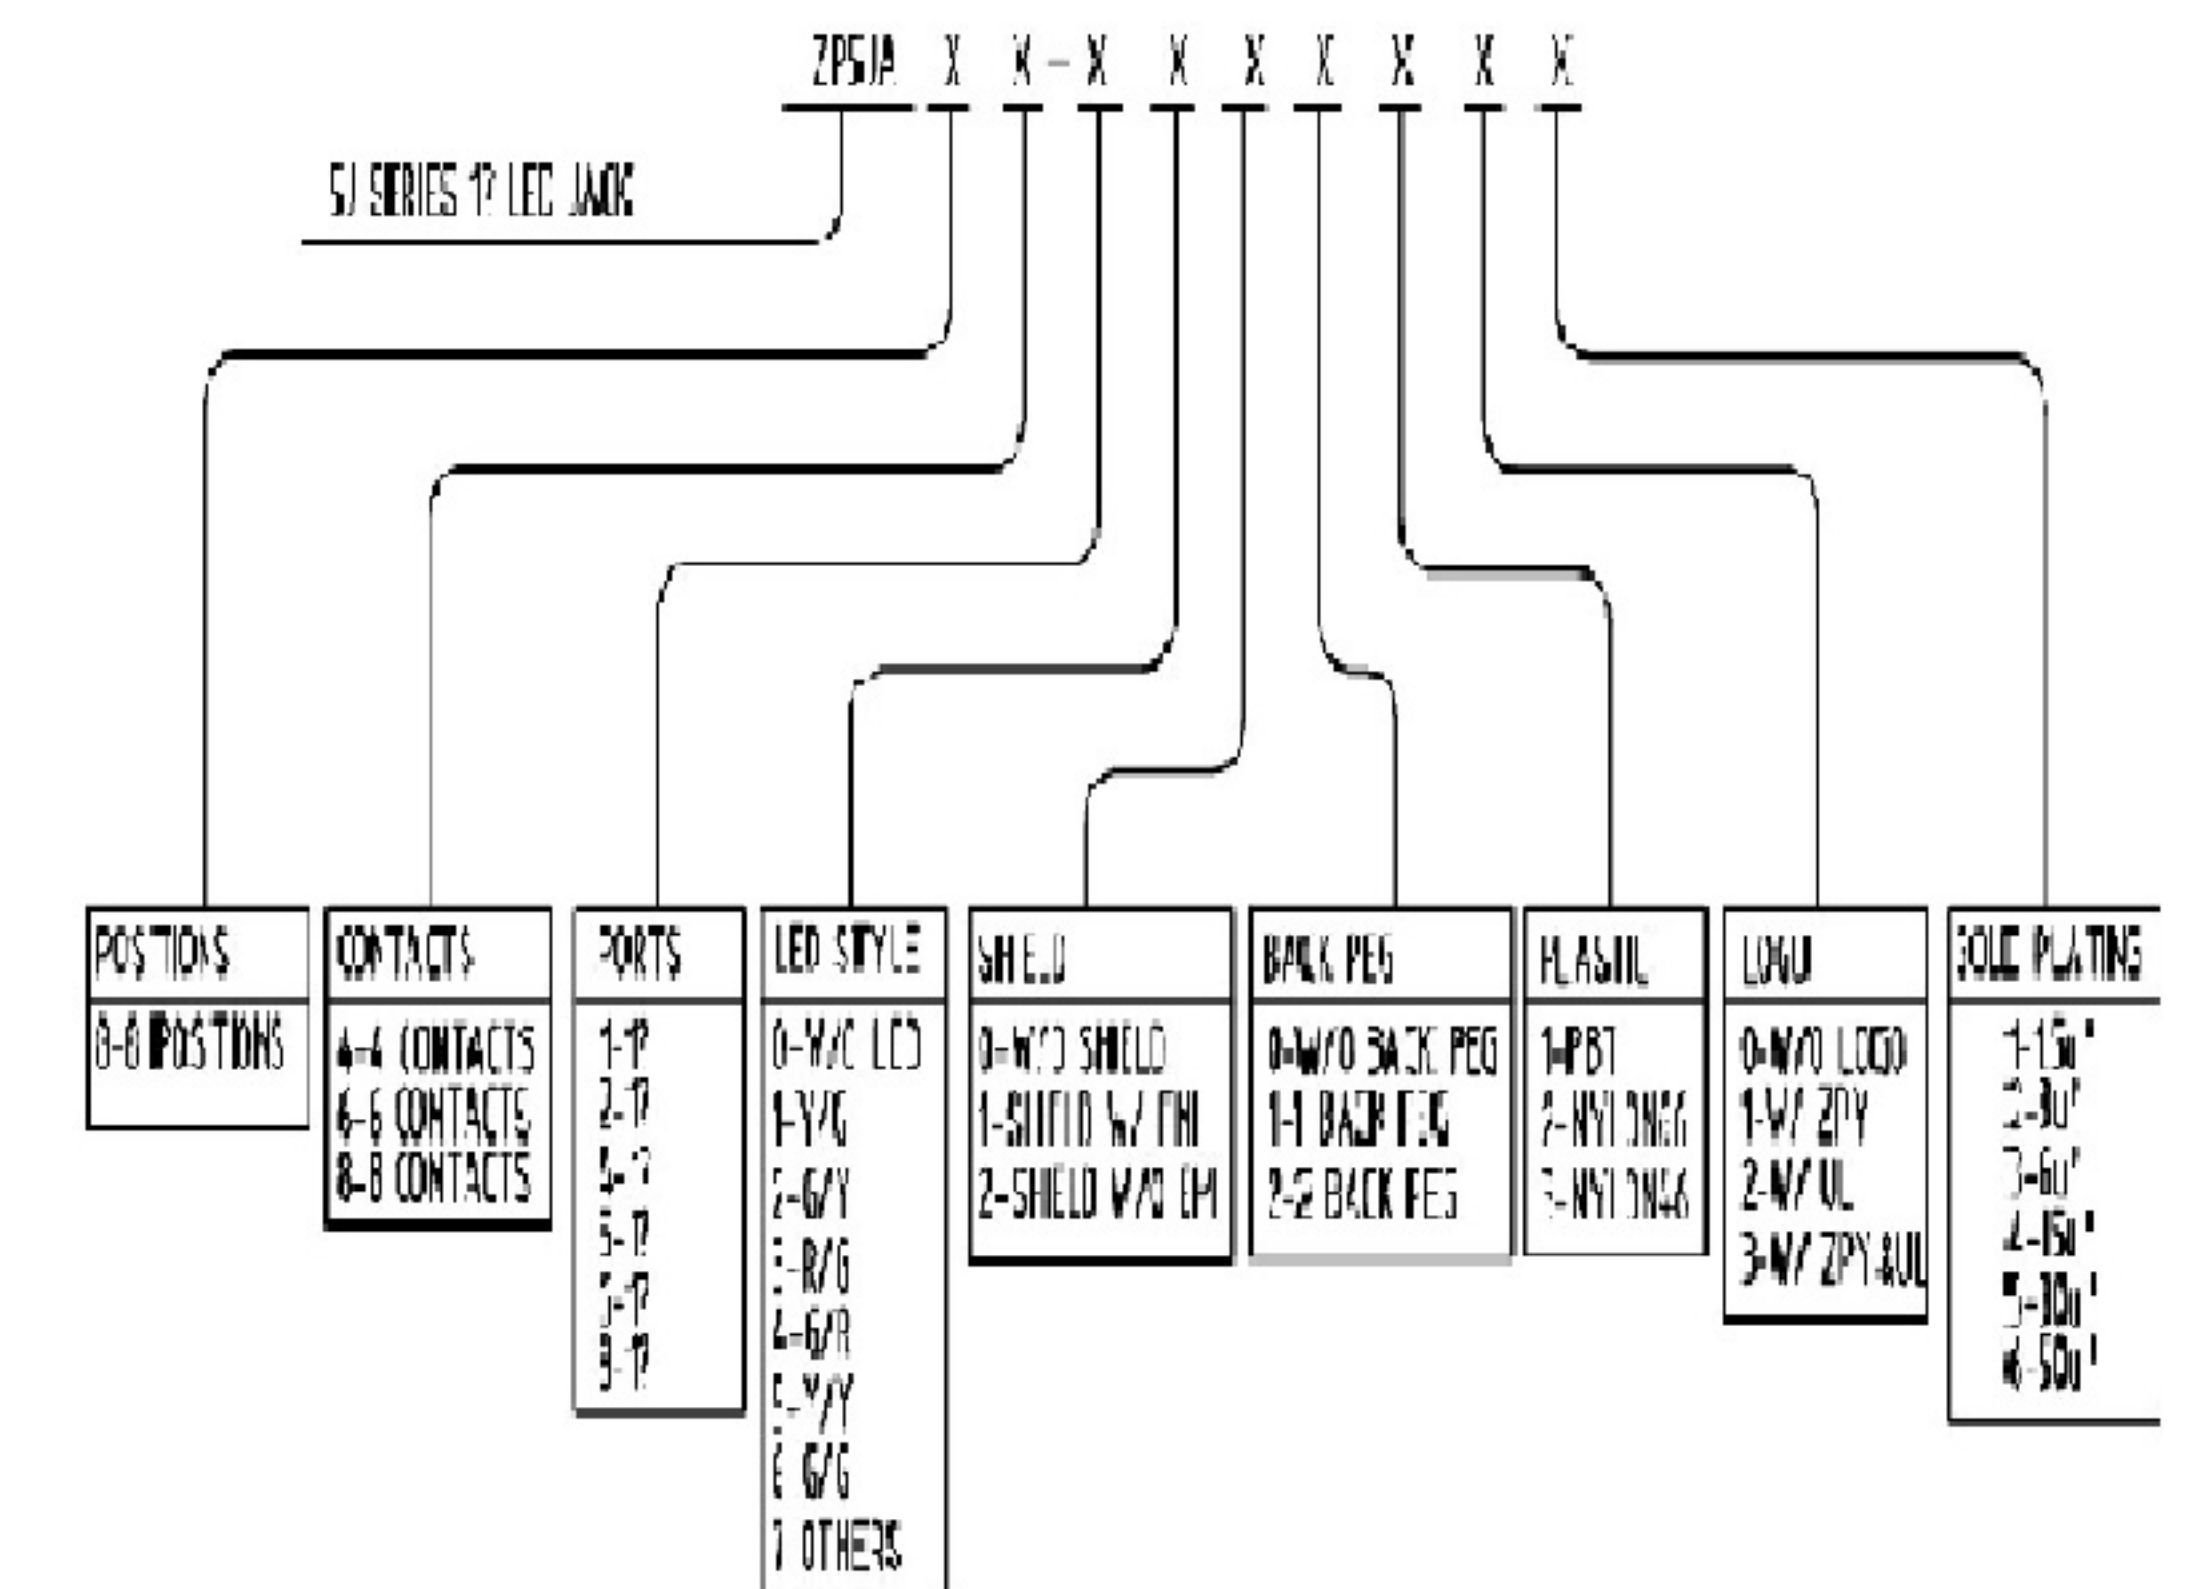

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

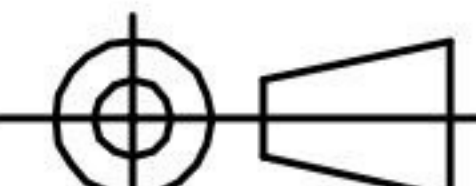TITLE: RJ45	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: JP.Gong
PART NO.:	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: TW.Xu
			.x±0.30	.x°±2.0°	
REMARK:	SHEET 1/2		.xx±0.25	.xx°±1.5°	DESIGND BY: ZG.Hu
			.xxx±0.10	.xxx°±1.0°	