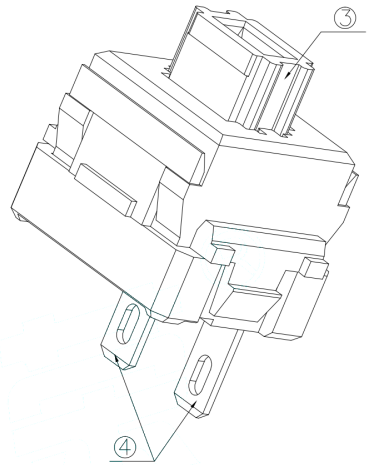
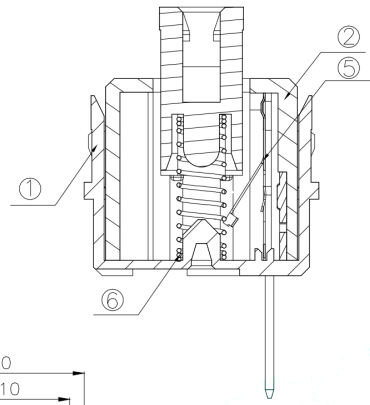
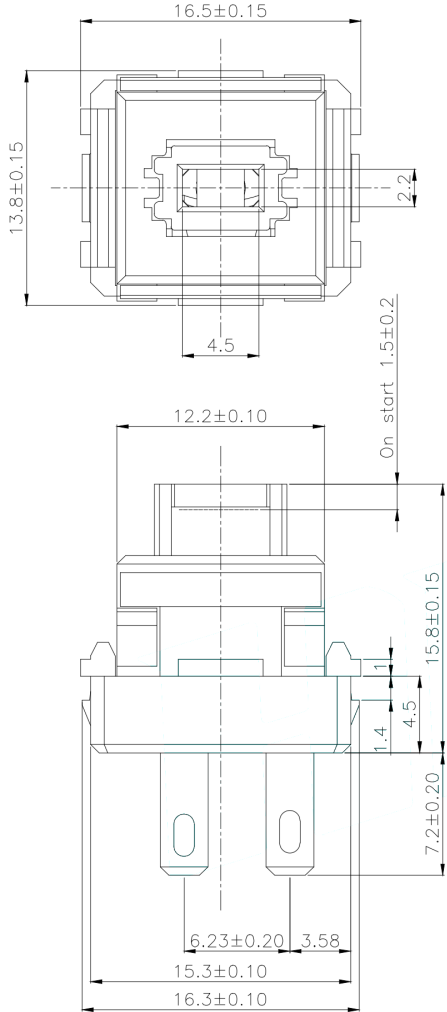


Circuit Diagram

NOTE:
1.Rating: DC 12V 10mA.
2.Dielectric withstanding : AC 110V for 1minute.
3.Contact resistance : 1Ω Max.
4.Insulation Resistance : 50mΩ Min.
5.Operating Force: 110gf±30gf.
6.Mechanical Life: 3,000,000 CYCLES.

⑥	Spring	—	1	SUS	Natural	—
⑤	Contact	—	1	SUS	Natural	—
④	Terminal	—	2	Brass	Plating silver	—
③	Knob	—	1	POM	Green	—
②	Cover	—	1	POM	Black	—
①	Base	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
DRAWN	LIUCAN		2021.01.12			
CHECKED				TITLE:	PUSHBUTTON SWITCHES	
APPROVALS				PART NO.	K8-1613D	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
				DRAWING NO.	_____	SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.