


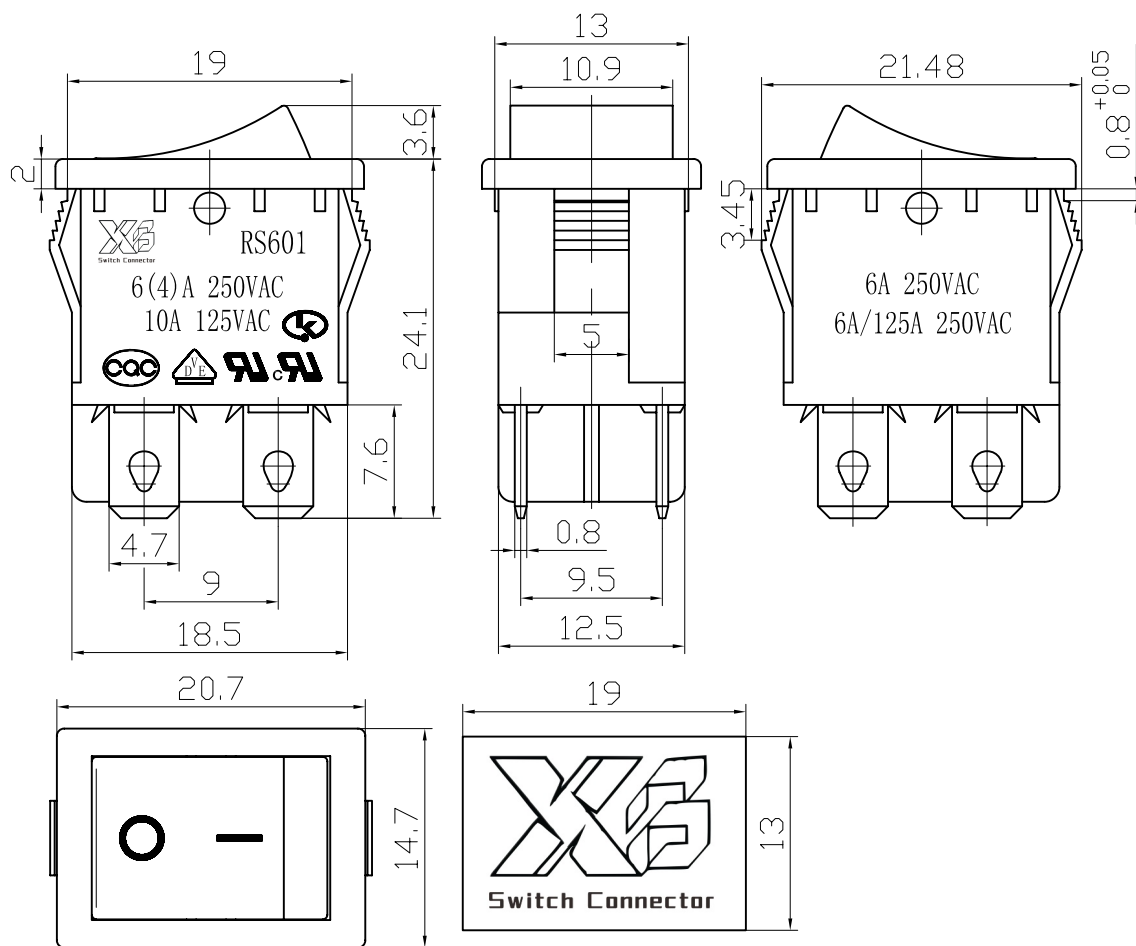

主要技术参数、性能
Main technical parameter, performance

项 目 Project	参 数 Parameter
电 路 图 Circuit diagram	4P ON-OFF
额定电流、电压 Rating	VDE 6(4)A 250VAC μ
	UL cUL 10A 125VAC
	UL cUL 6A 250VAC
	CQC 6A 250VAC T85
	CQC 6A/125A 250VAC
	EK 6(4)A 250VAC
绝缘电阻 Insulation resistance	$\geq 100M\Omega$
接触电阻 Contact resistance	$\leq 20m\Omega$
耐电压(端子与端子) Withstand voltage	$\geq 1500VAC/5S$
(极对按钮) Terminals to button	$\geq 3000VAC/5S$
电气寿命 Electrical life	$\geq 1 \times 10^4$ Cycles
端子强度 Terminal strength	$\geq 80N$

版 本 Addition	修 改 Revision	核 准 Approval	日 期 Date	普通公差: 0~3 ± 0.05 ; 3~6 ± 0.10 ; Common Tolerance 6~30 ± 0.20 ; 30~~ ± 0.30 ;			东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			成 品 图 Product's Drawing	
							比 例 Scale	Free	名 称 Name	跷板开关	
				设 计 Drawn by	周益强	日 期 Date	2008.06.18	单 位 Units	mm	型 号 Model	RS601
				审 核 Checked by	周培雷	核 准 Approved by	张光良	投 影 Projected		图 号 File No.	RS601D-201011BB