
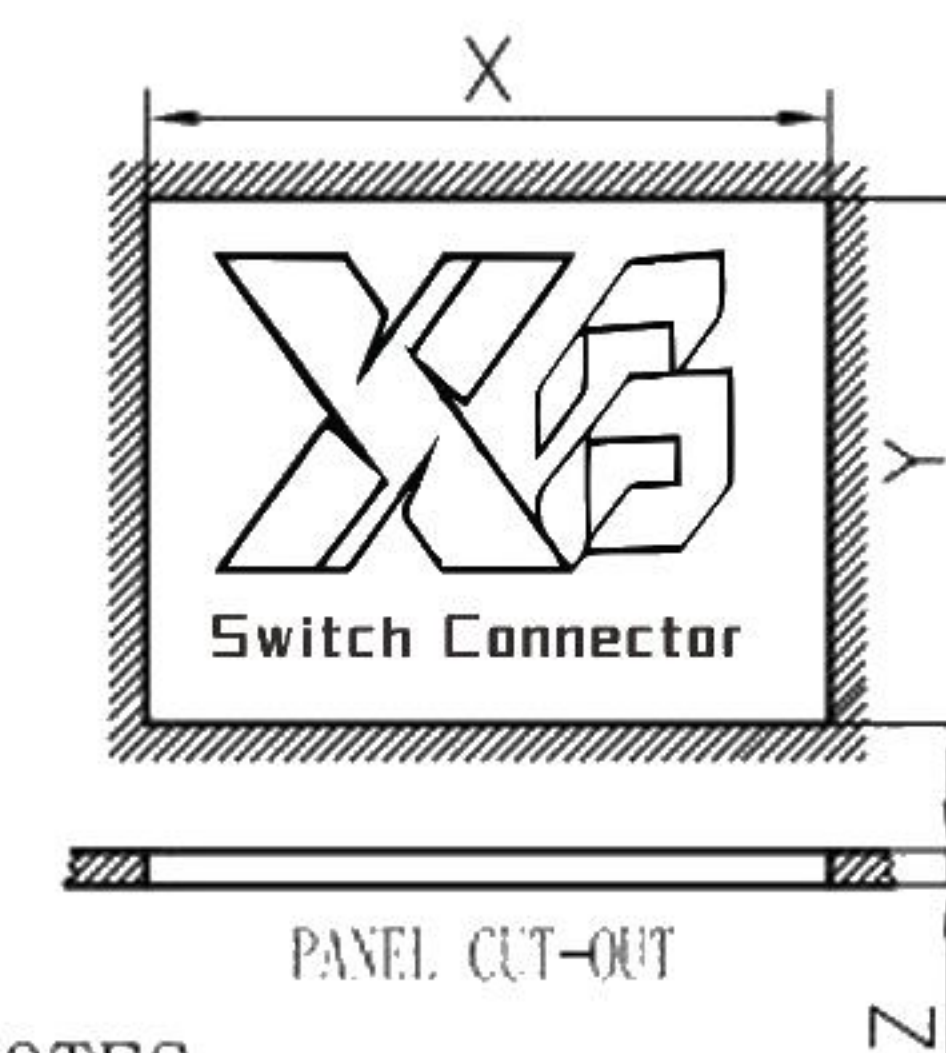


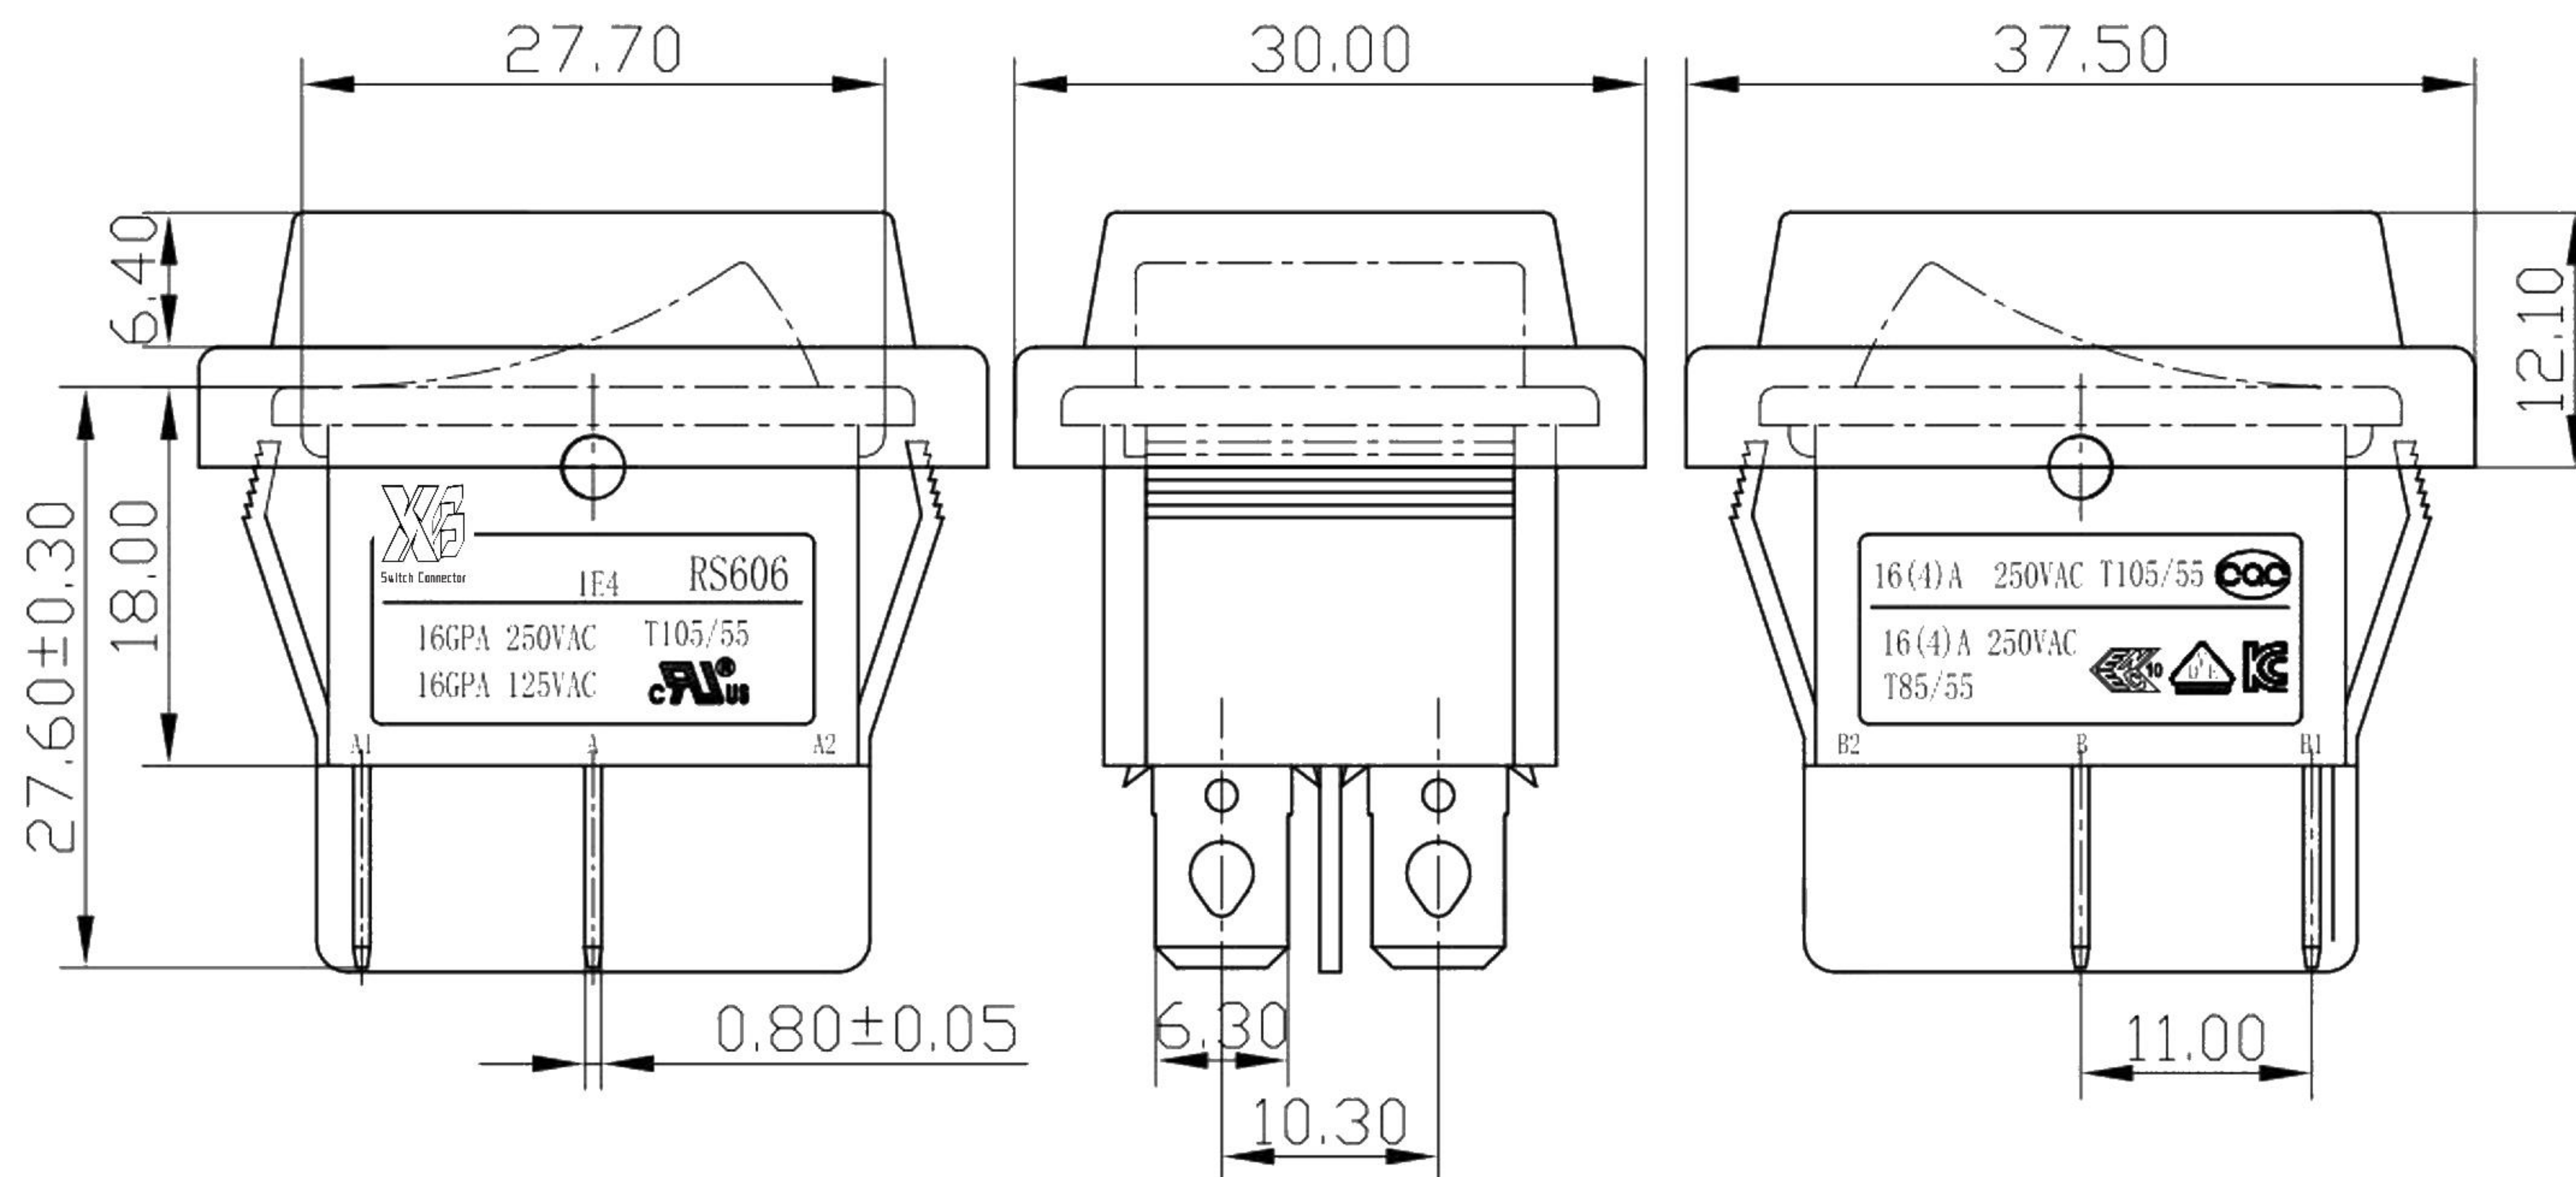

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	21.90~22.10	28.9~29.1
1.25~2.00	21.90~22.10	29.1~29.2

NOTES:

1. Rating:

KC 16(4)A 250VAC T85/55

VDE ENEC 16(4)A 250VAC T85/55

CQC 16(4)A 250VAC T105/55

UL cUL 16GPA 125VAC

16GPA 250VAC T105/55

2. Circuit Diagram: 4P ON-OFF

3. Terminal Strength: $\geq 80N$

4. Electrical life: ≥ 10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min

Terminals to Button: 3000VAC 1min


Leakage Current: 1mA

6. Current resistance: $\leq 50m\Omega$ (initial)

7. Insulation resistance: $\geq 100M\Omega$

8. Body Material: NYLON 66 94V-0~2

SWITCHING CIRCUIT

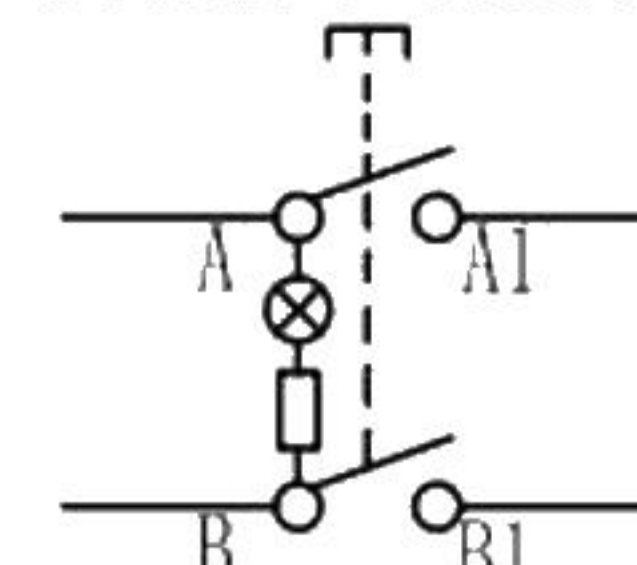

10	防水帽	1	PVC		
9	基座	1	环保阻燃PA66		
8	弯端	2	0.8mm黄铜带 +复合银触点	镀锡	
7	中端	2	0.8mm黄铜带	镀锡	
6	接触桥	2	0.8mm黄铜带 +复合银触点	镀银	
5	套管	2	0.3mm拉伸钢	镀镍	
4	弹簧	2	∅0.45弹簧钢丝	发黑	
3	内套	1	环保阻燃PA66		
2	灯泡	1			绿灯
1	按钮	1	环保阻燃PC		
序号	名称	数量	材料	处理	备注

50*38*31cm箱, 50只*20袋装=1K件, 净重: 16.1 KG, 毛重: 18.5=KG,

A4				普通公差：		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	干 方 毅	核 对 CHECKED BY	吴 飞	型 号 MODEL NO.	/RS606		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	±0.50	日 期 DATE	2022. 07. 06	核 准 APPROVAL BY	周 培 雷	图 号 DWG NO.	RS606-201A011G1B+防水帽-ZP		
				ANGULAR	±5°								