

RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

规格尺寸: 型号	DIM:A	DIM:B	DIM:C
XB-D01F-A-2P-S1	9.50	7.50	3.00
XB-D01F-A-3P-S1	12.50	10.50	6.00
XB-D01F-A-4P-S1	15.50	13.50	9.00
XB-D01F-A-5P-S1	18.50	16.50	12.00
XB-D01F-A-6P-S1	21.50	19.50	15.00
XB-D01F-A-7P-S1	24.50	22.50	18.00
XB-D01F-A-8P-S1	27.50	25.50	21.00
XB-D01F-A-9P-S1	30.50	28.50	24.00
XB-D01F-A-10P-S1	33.50	31.50	27.00
XB-D01F-A-11P-S1	36.50	34.50	30.00
XB-D01F-A-12P-S1	39.50	37.50	33.00


SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 15A / Pin
 - 1-2. CONTACT RESISTANCE: 30m Ω
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500M Ω ,
MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.
- TEMPERATURE RISE : 30° C MAX

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	C70250	7	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	CONNECTOR		DRAWING	ZENQ. CHEN	DWG. No.	3.0母座
PART NO.	XB-D01F-A-S1系列		CHECK	JUN. YANG	REV.	A1
	UNIT :	TOLERANCE	ANGLE	APPROVAL	DATE	2023.5.8
	mm	OTHERWISE	0° ±3°	SCALE	PAGE	1 OF 1

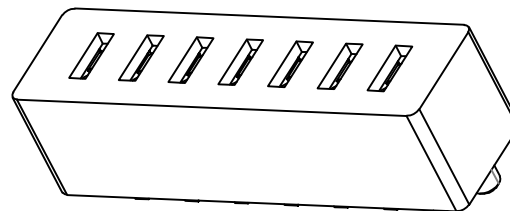

3D VIEW

