

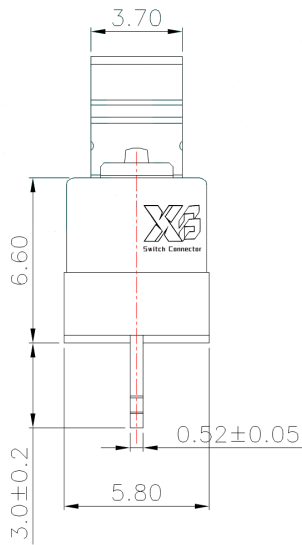
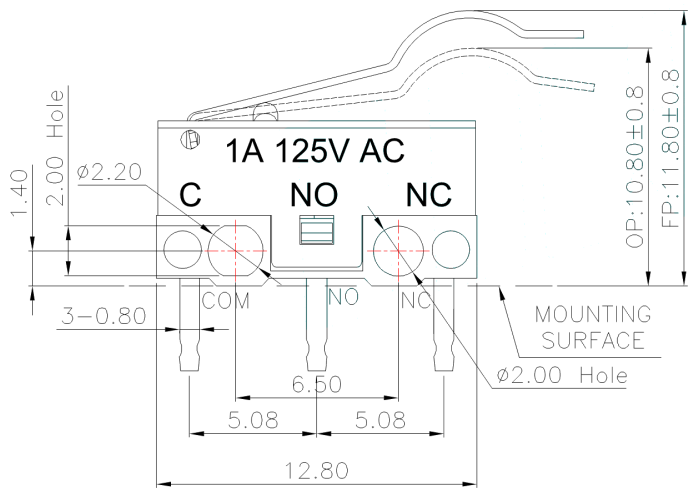


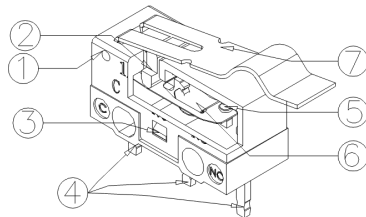


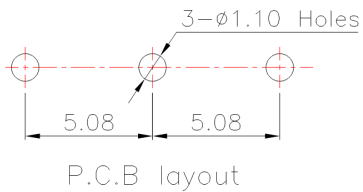

- NOTE:
- 1.Rating:DC30V 1A
 - 2.OP:10.80±0.8
 - 3.Operating froce:30±15gf
 - 4.Mechanical Life:1,000,000

⑦	Lever	—	1	SUS	—	—
⑥	Shrapnel	—	1	Beryllium Copper	—	—
⑤	Contact	—	1	Silver Alloy	—	—
④	Terminal	—	3	Brass(0.52t)	Plating silver	—
③	Housing	—	1	PBT	White	—
②	Knob	—	1	PBT	White	—
①	Cover	—	1	PBT	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

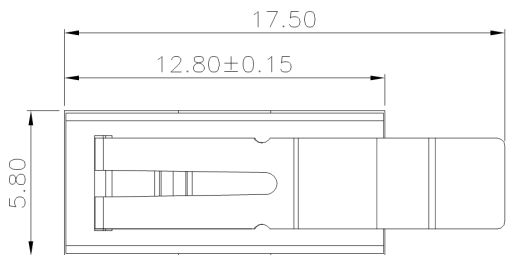

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

CHECKED			TITLE:	MICRO SWITCHS		
APPROVALS			PART NO.	K9-1267G-G166		
TOLERANCES ARE			30~45L ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1
			DRAWING NO.		PROJ:	SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.