

Housing Material: PBT UL94V-0, black/White  
 Contact Terminal: C2680  
 Metallic Shell: Spcc430

CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL  
 OVER 100u" MIN. TIN IN SOLDERING  
 AREA GOLD PLATED IN CONTACT AREA.

Salt Spray Test Requirements: Test 12H


High temperature resistance of gelatinous heart: 200°~220°

Contact Resistance:  
 30 milliohms MAX

Dielectric Withstanding Voitage:  
 500 V AC AT Sea Level

Insulation Resistance:  
 1000MEGA ohms MIN

U221-04XN-1BU07-X1

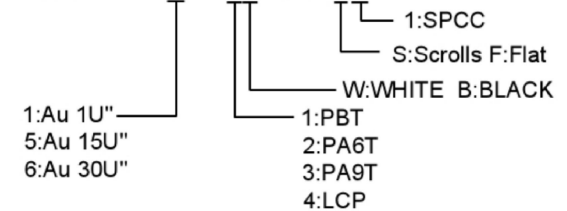

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES
	DATE	REVISED	APPROVED		
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE:	USB 2.0		
DWN	VIEW:	PART NO.:			
CHKD	UNIT: mm/in	DWG NO.:	U221-04XN-1BU07-S1		
APPD	SIZE: A4	WEIGHT	SHEET	REVISION	
			1/1	A0	