


F: Flat

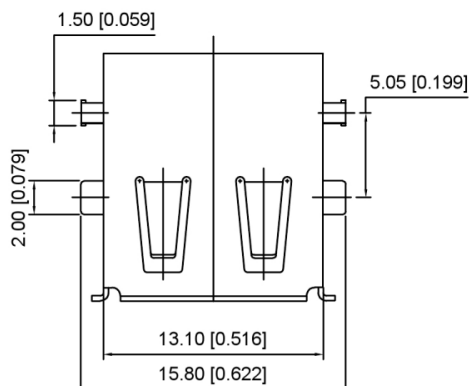

S: Scrolls


### U221-04XN-4BU02-XS

- S: SUS
- S: Scrolls F: Flat
- W: WHITE B: BLACK
- 1: Au 1U"
- 5: Au 15U"
- 6: Au 30U"
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Housing Material: LCP 94V-0, black/White  
 Contact Terminal: COPPER ALLOY. (T=0.25mm)  
 Metallic Shell: SUS

FINISH:

- 2-1. CONTACT: UNDER PLATED 50u" MIN NICKEL ALL AREA.  
 100u" MIN TIN IN SOLDER TAIL AREA.  
 30u" MIN. GOLD PLATED AT CONTACT AREA.
  - 2-2. SHELL: NICKEL 50u" MIN. PLATING OVERALL.
- ENVIRONMENTAL CHARACTERISTICS:  
 3-1. OPERATION TEMPERATURE RANGE : -10°C TO +85°C.



				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
	DATE	REVISED	APPROVED		

www.alpsr.com www.gdxdz.com www.xbswitch.com



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE: USB 2.0
DWN	VIEW:	PART NO.: U221-04XN-4BU02-XS
CHKD	UNIT: mm/in	DWG NO.: U221-04XN-4BU02-XS
APPD	SIZE: A4	WEIGHT
		SHEET
		REVISION
		1/1
		A0