

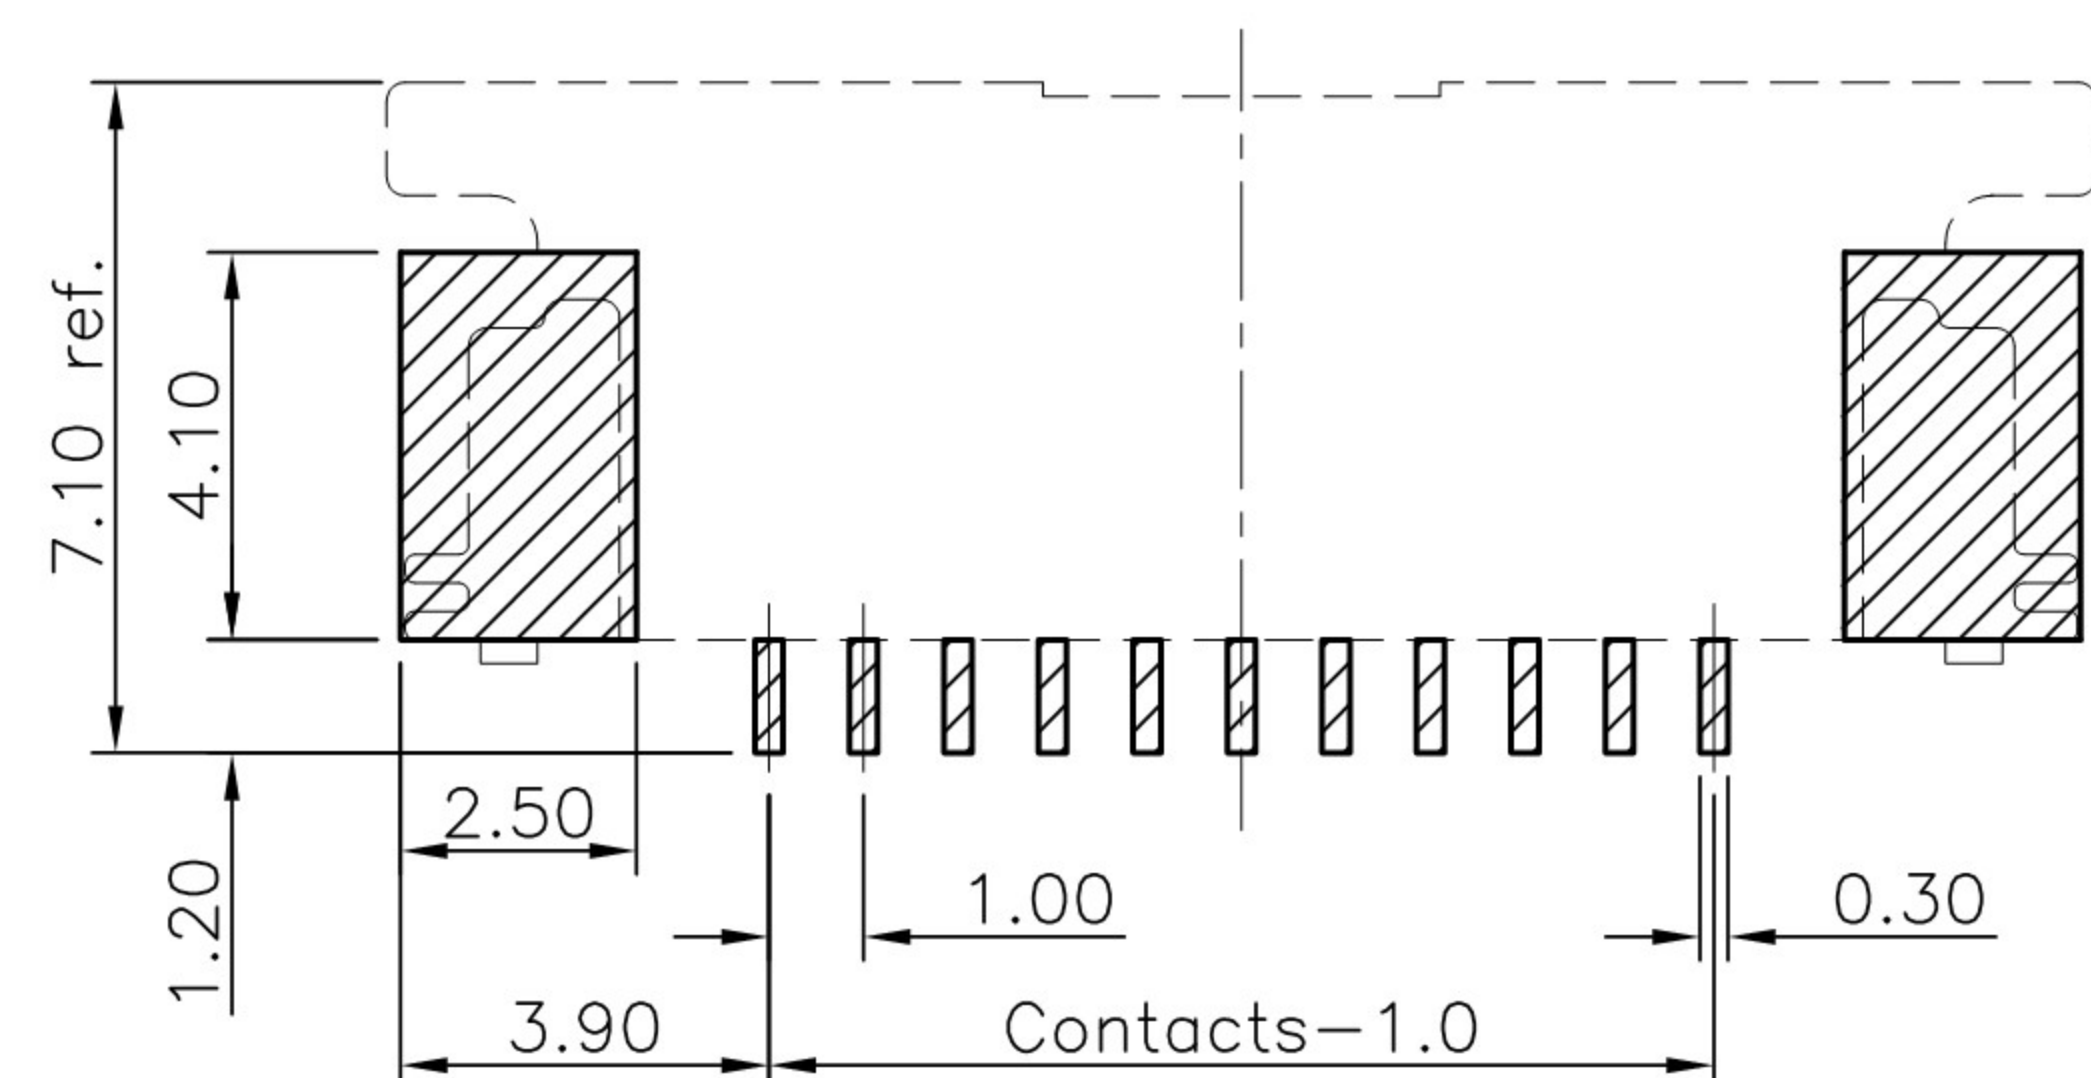


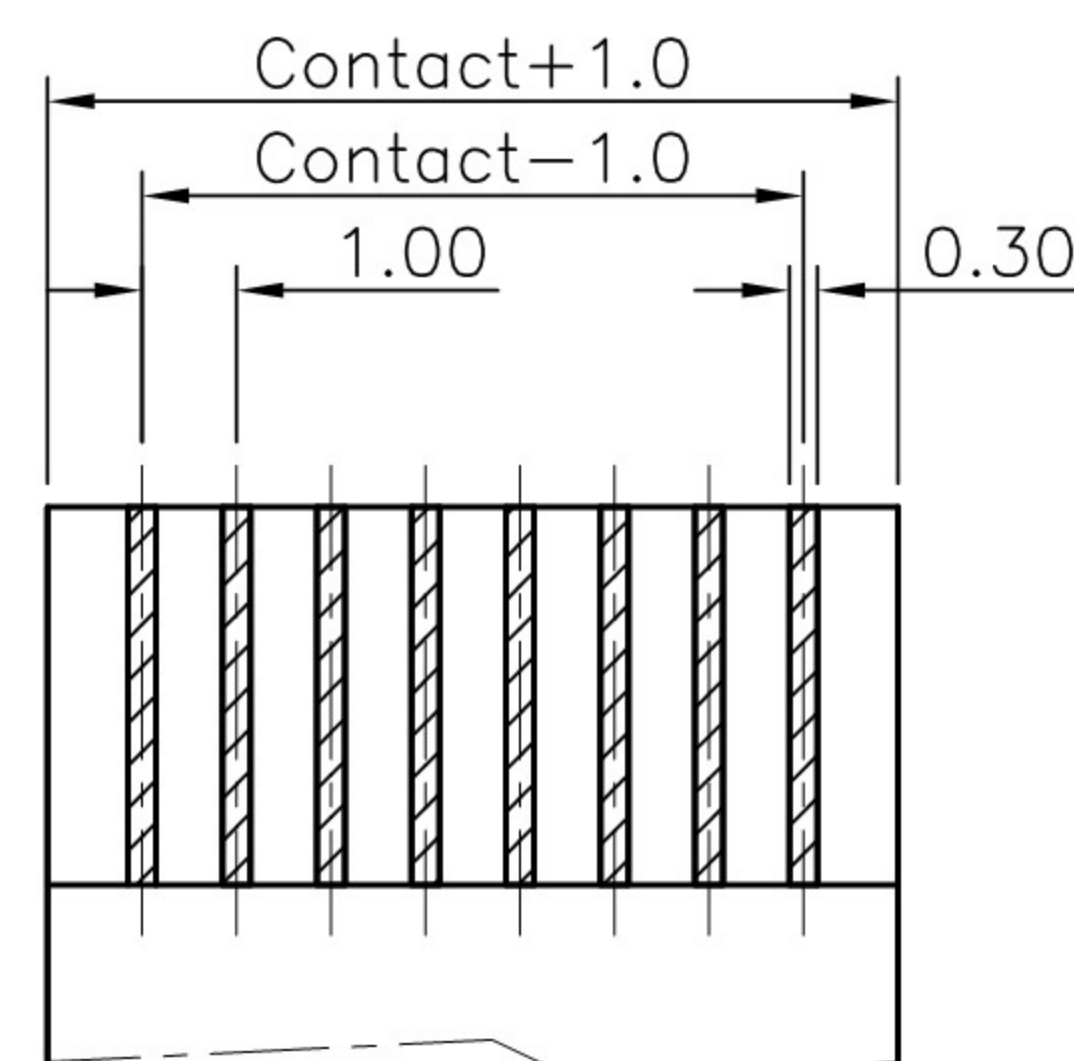

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

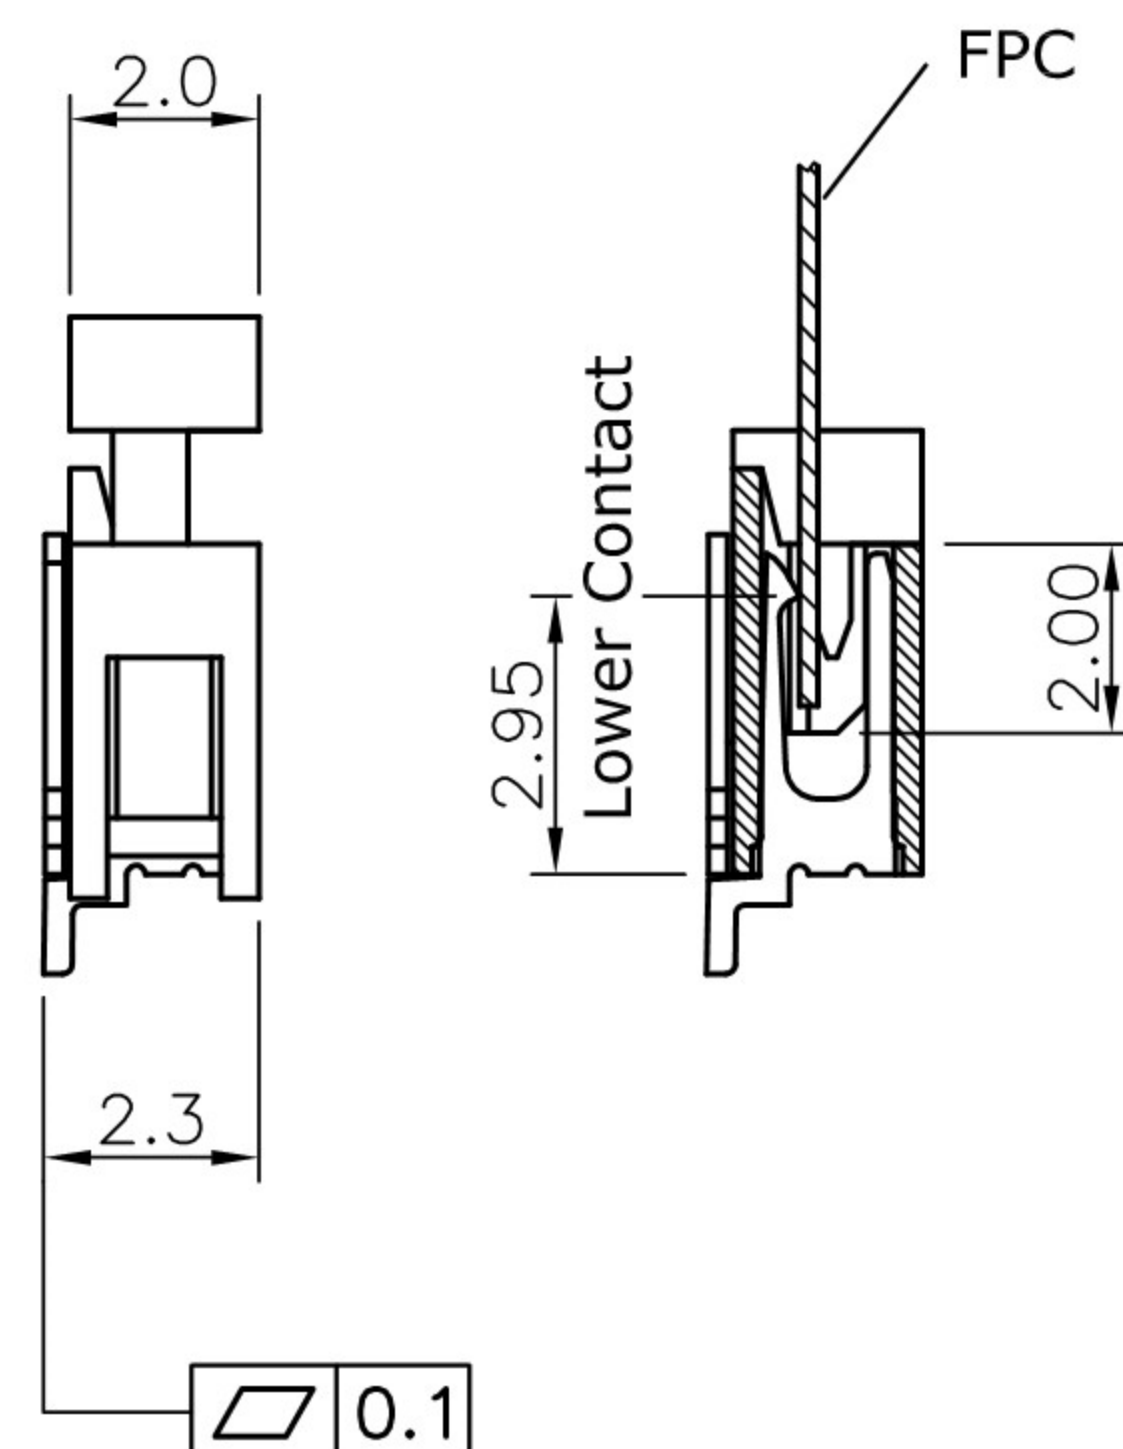

FPC DIMENSION
THICKNESS 0.30mm

REV.	DESCRIPTION	DRAWN	DATE
2	New frame, removed page 2 dims. table, add " How to order" notes	Fros	2018/01/10
3	ECR2000008	Fros	2020/07/02

- △₂
- 1 pin count: xx= 03~30
(Please contact with sales for the pins count available)
 - 2 contact type: L= Lower contact
 - 3 plating: A= Tin over Nickel plating
 - 4 packaging: A= tape and reel

4	HOLDDOWN	Brass, 100u" Tin over 50u" Ni plating
3	CONTACT	Phosphor Bronze, 100u" Tin over 50u" Ni plating
2	ACTUATOR	PPS, UL94V-0
1	HOUSING	PA46, UL94V-0
NO.	PART NAME	DESCRIPTION

DSND		SCALE: N/A	MODEL TYPE: FPC CONNECTOR		
DWN		VIEW: 	PART NO.: XB-311B-XXLAA-R		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					