

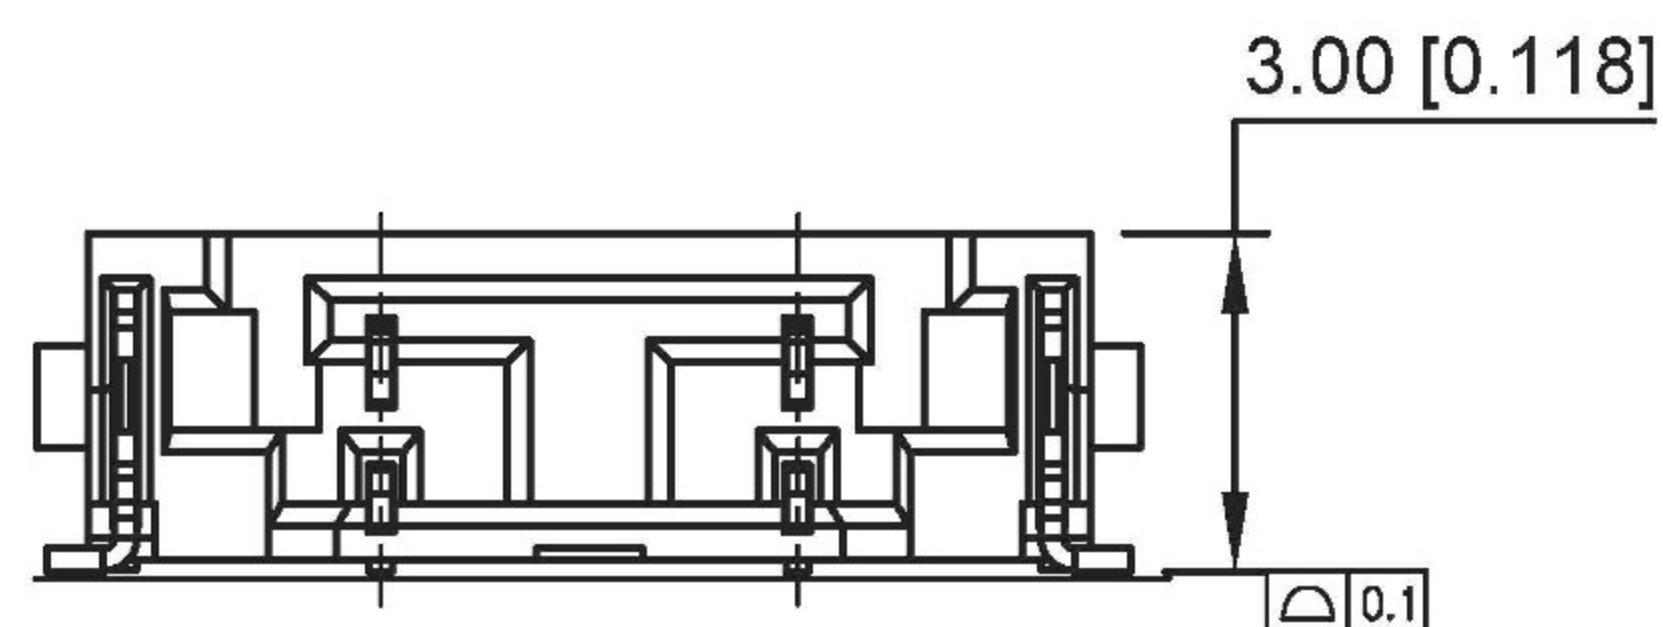
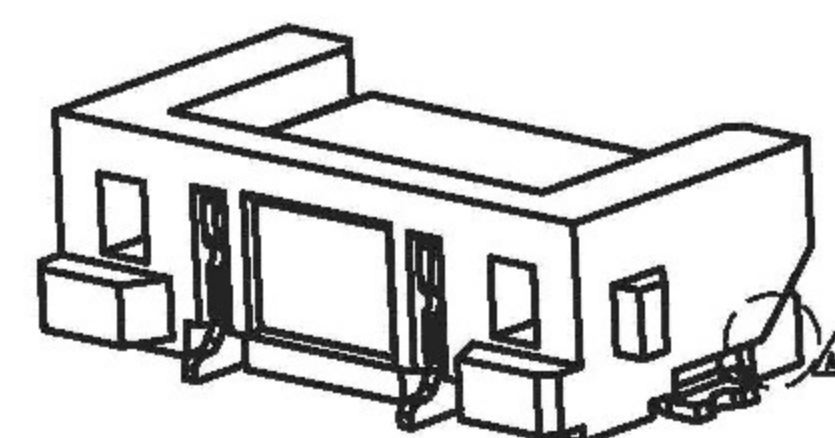
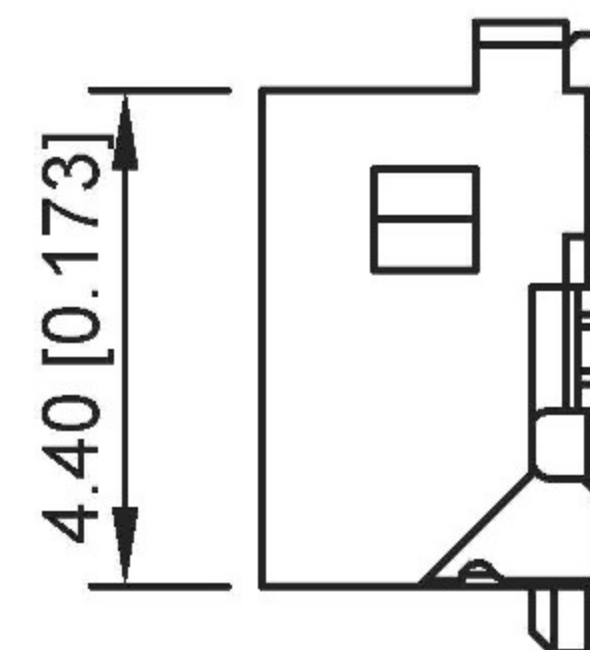


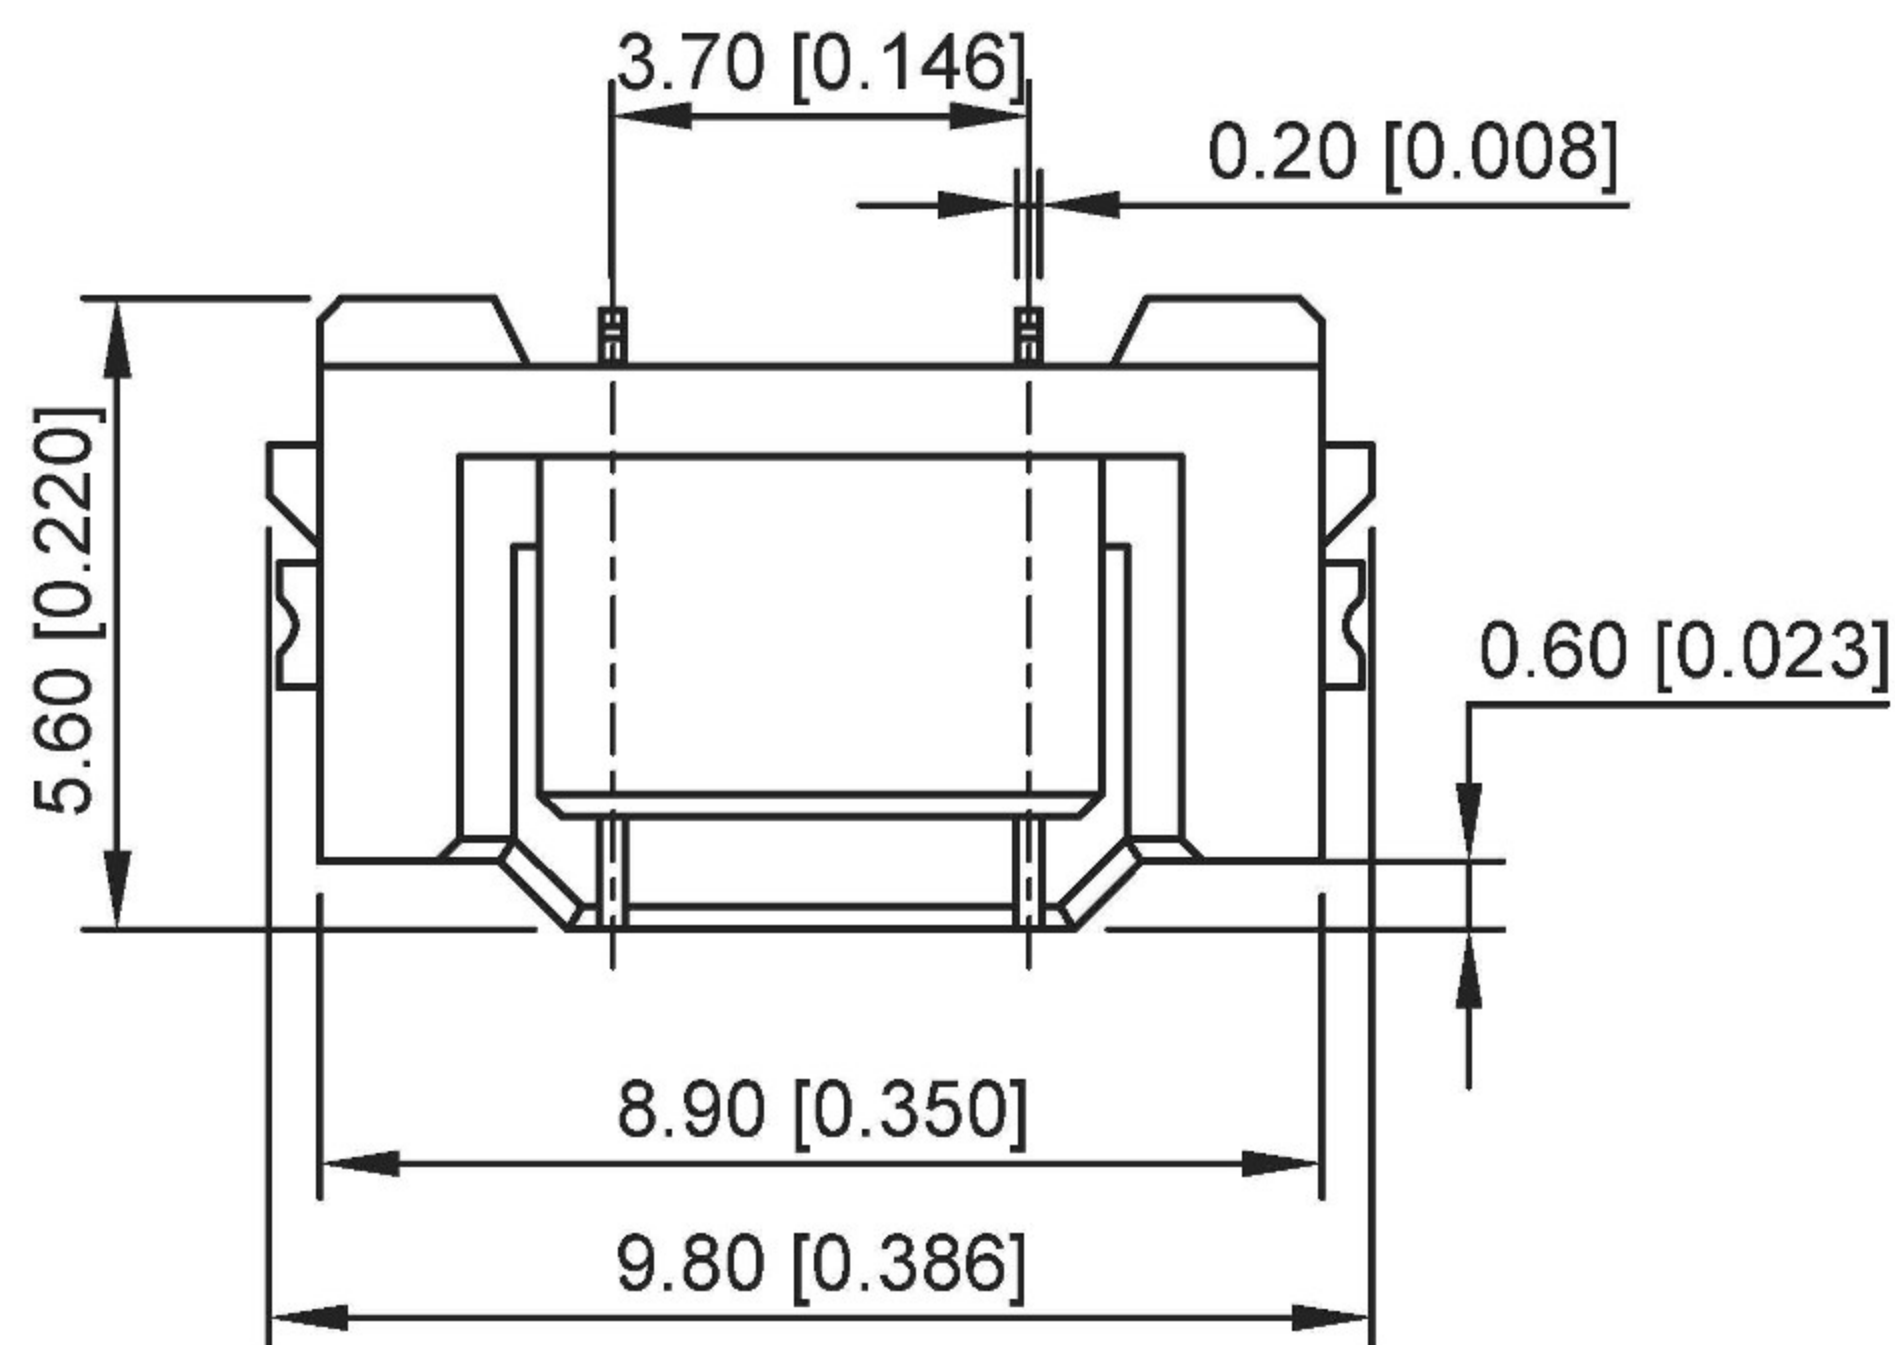

PCB LAYOUT

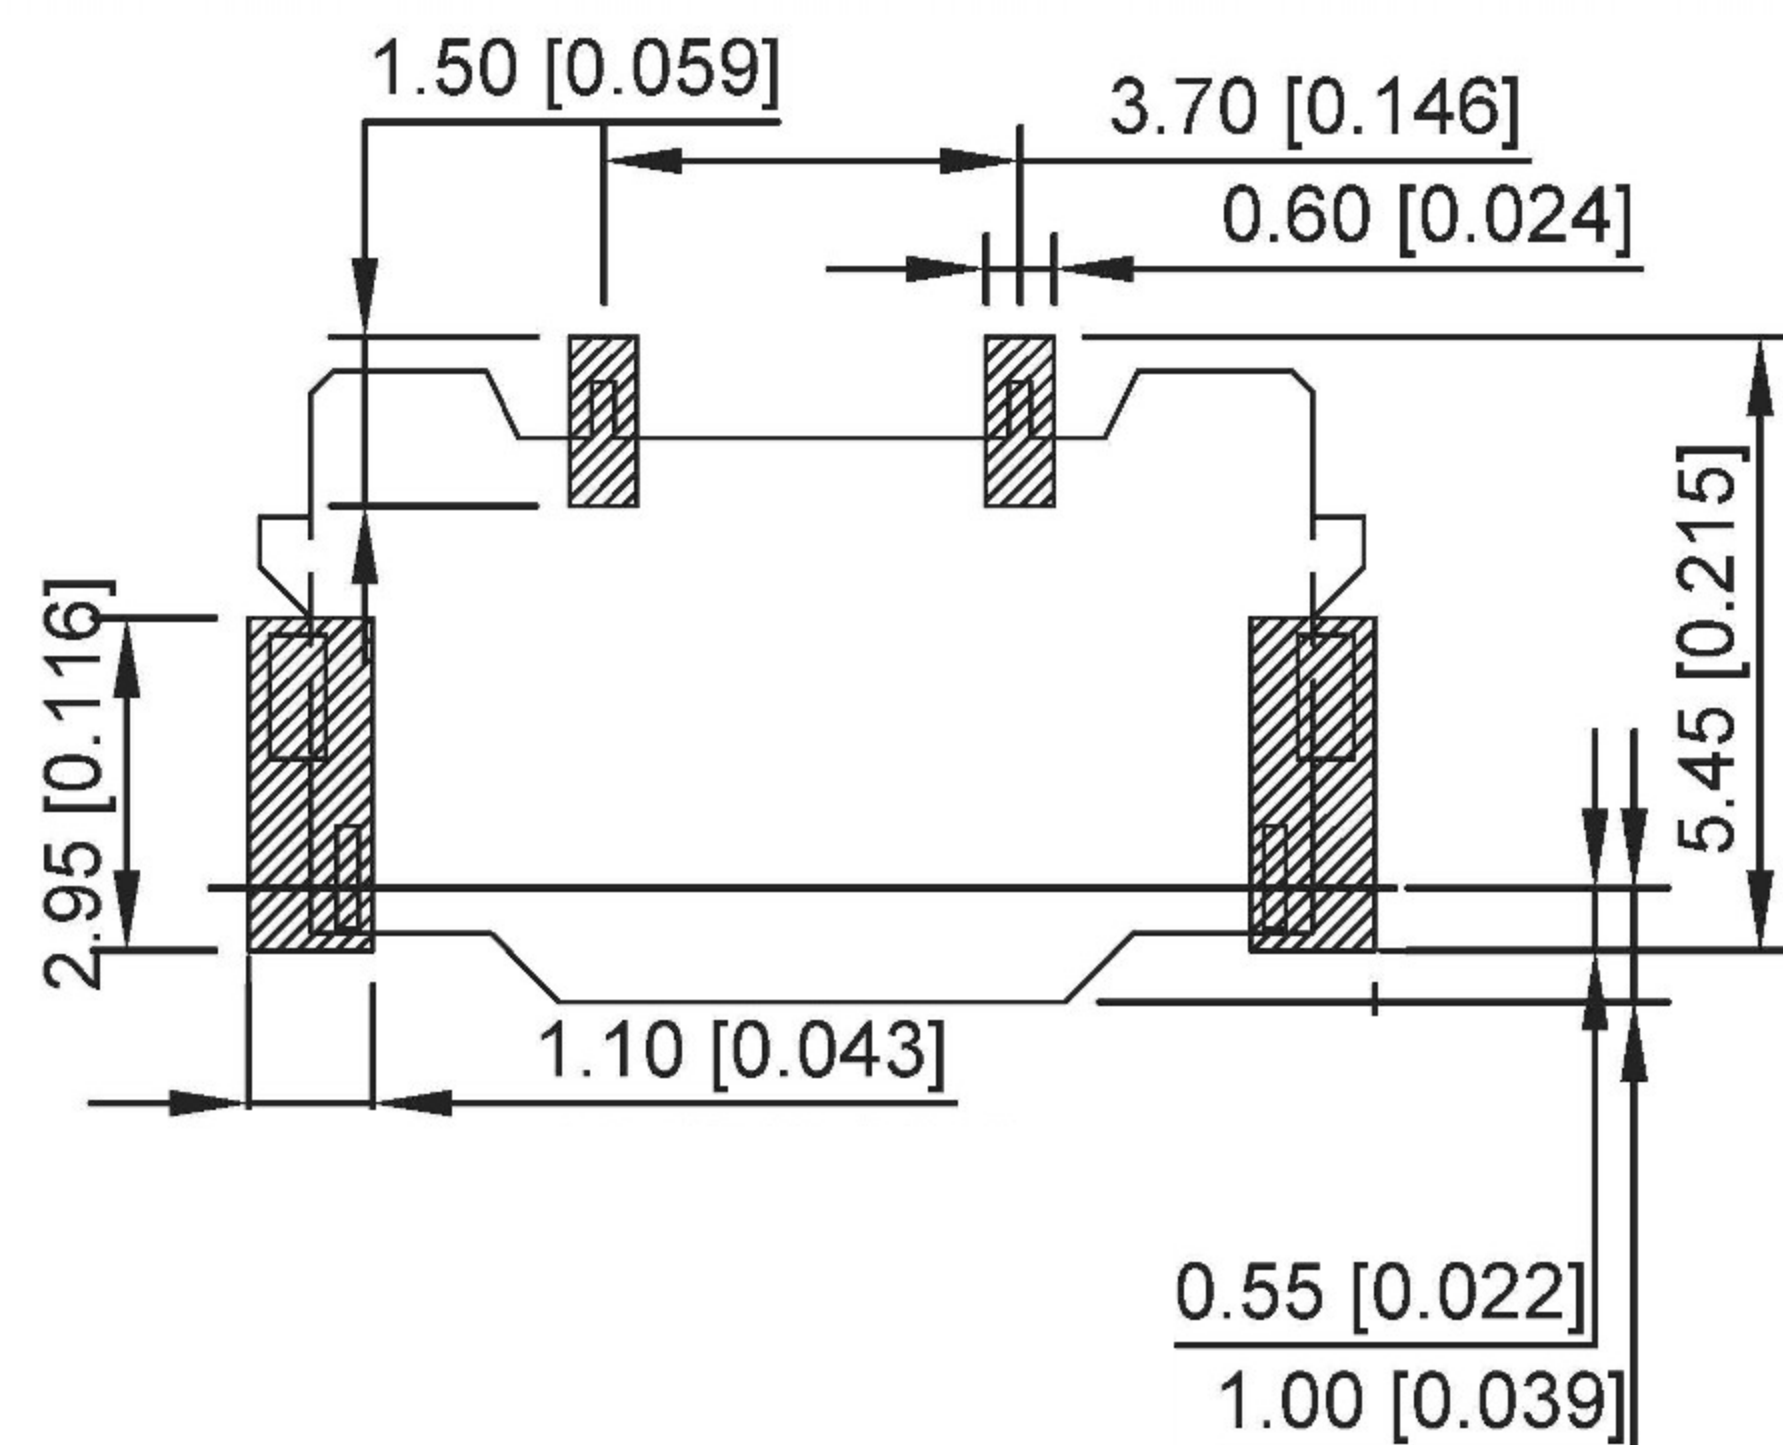

Specifications:
 Voltage rating:500V AC/DC
 Current rating:2A AC/DC
 Withstanding voltage:1500V AC/minute
 Temperature range: -40℃ ~85℃
 Insulation resistance:≥1000MΩ
 Contact resistance:≤40mΩ
 After environmental testing:≤80mΩ

X3700W F-02HF-LPSN
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-WAFER
- ③ Welding Board Angle:F-Female
- ④ Row No.-Pin No.:XX-Single Row
- ⑤ Plug the Pin&Special No.:HF-Halogen Free
- ⑥ Material:LP-LCP 94V-0
- ⑦ Plating Category:SN-Bright Tin Plating

X3700WM-02HF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze	Tin-Plated	Phosphor Bronze	Tin-Plated	X3700WM
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finsh (Solder Tab)	Mates With Housing

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X3700WF-XXHF-LPSN_1				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
DATE					REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0