
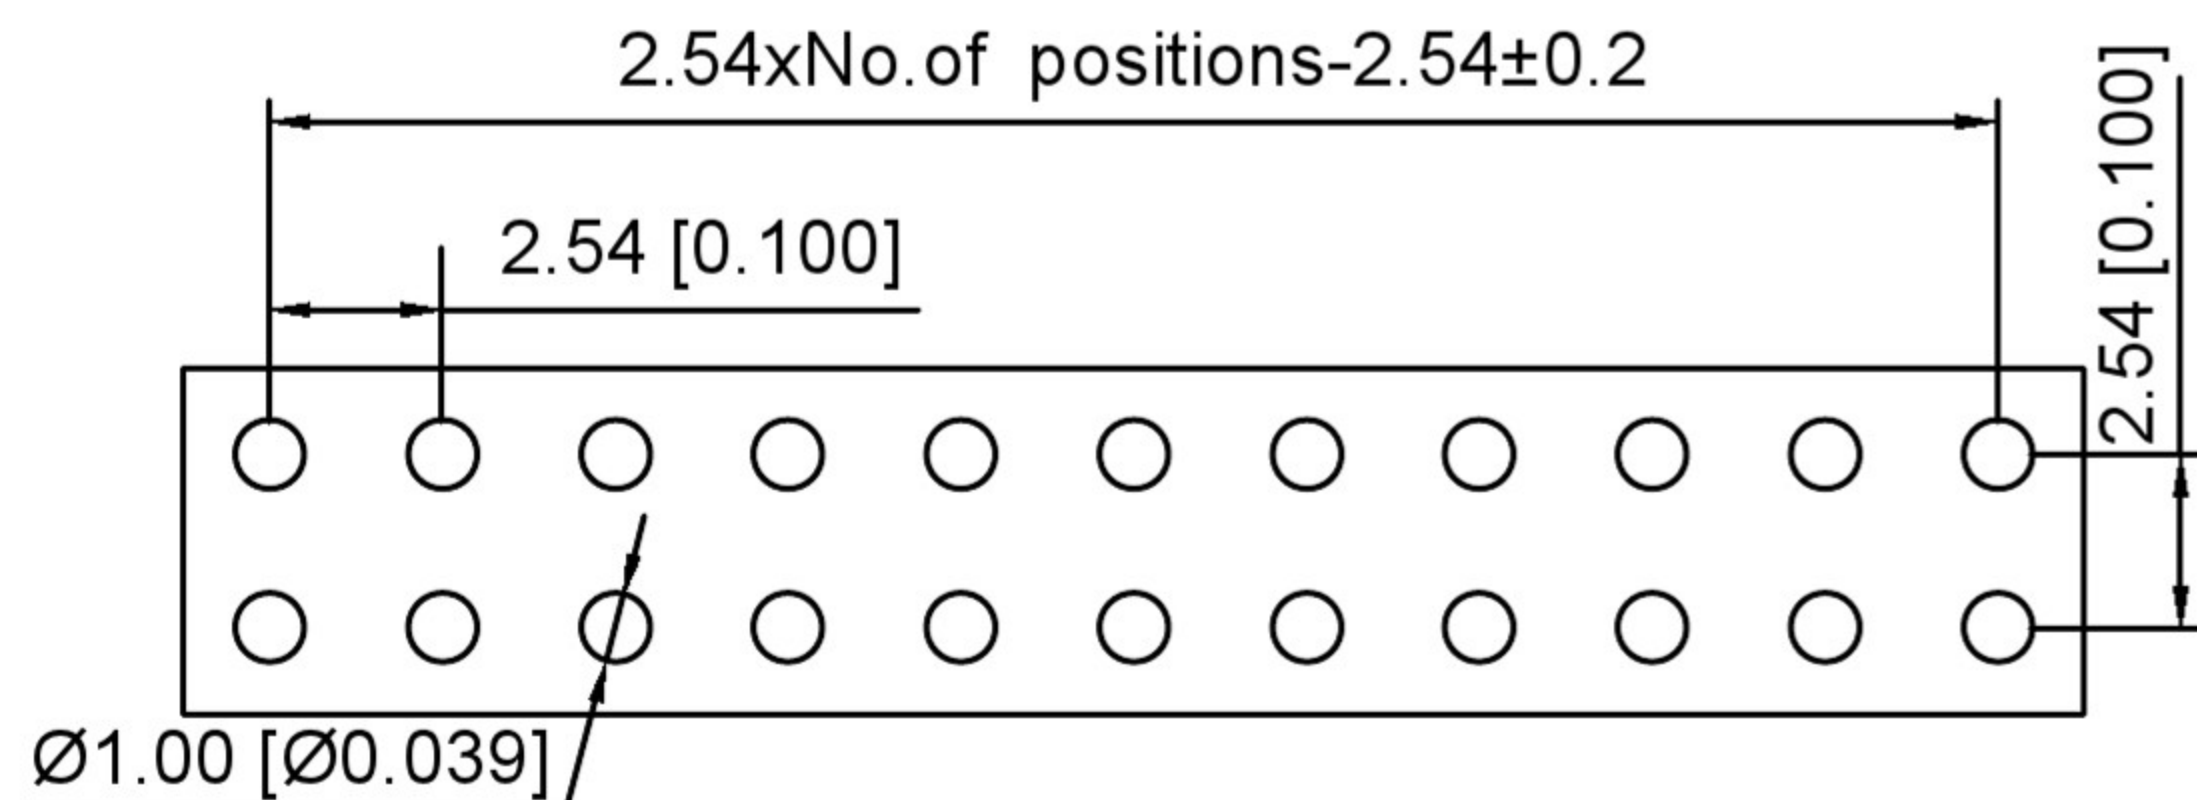
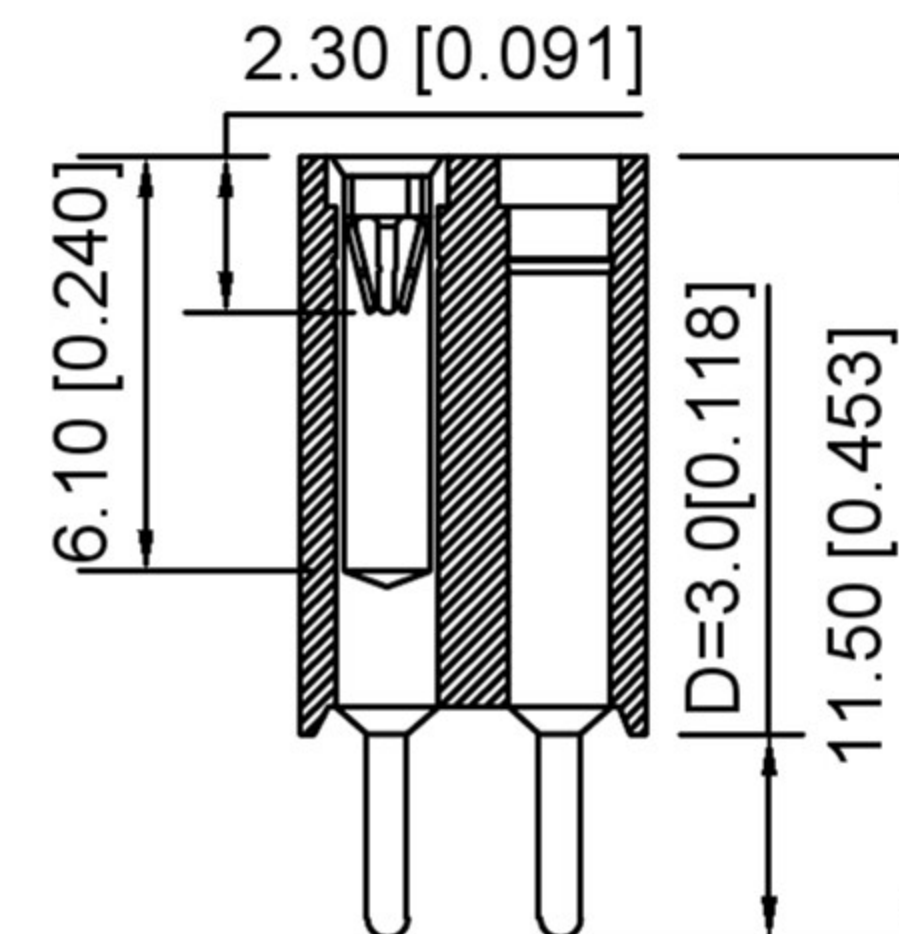
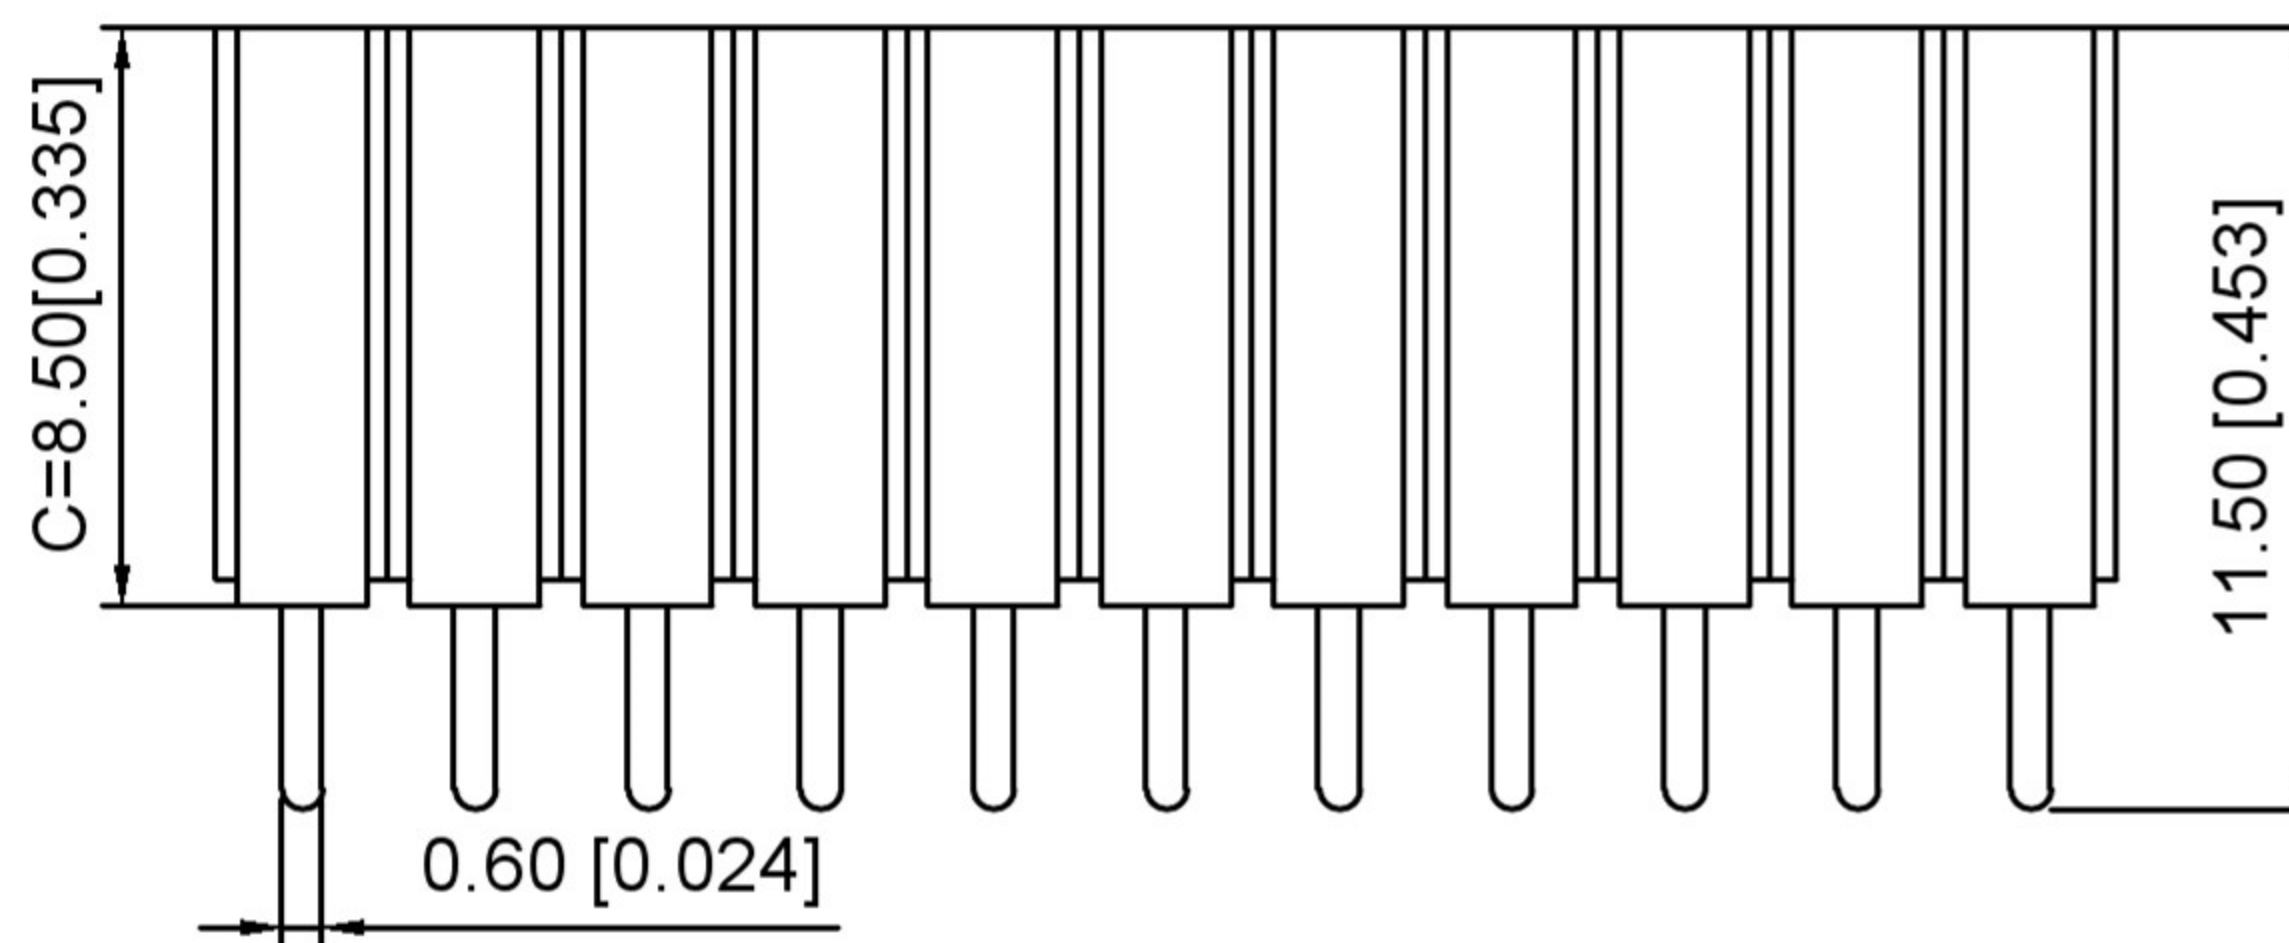


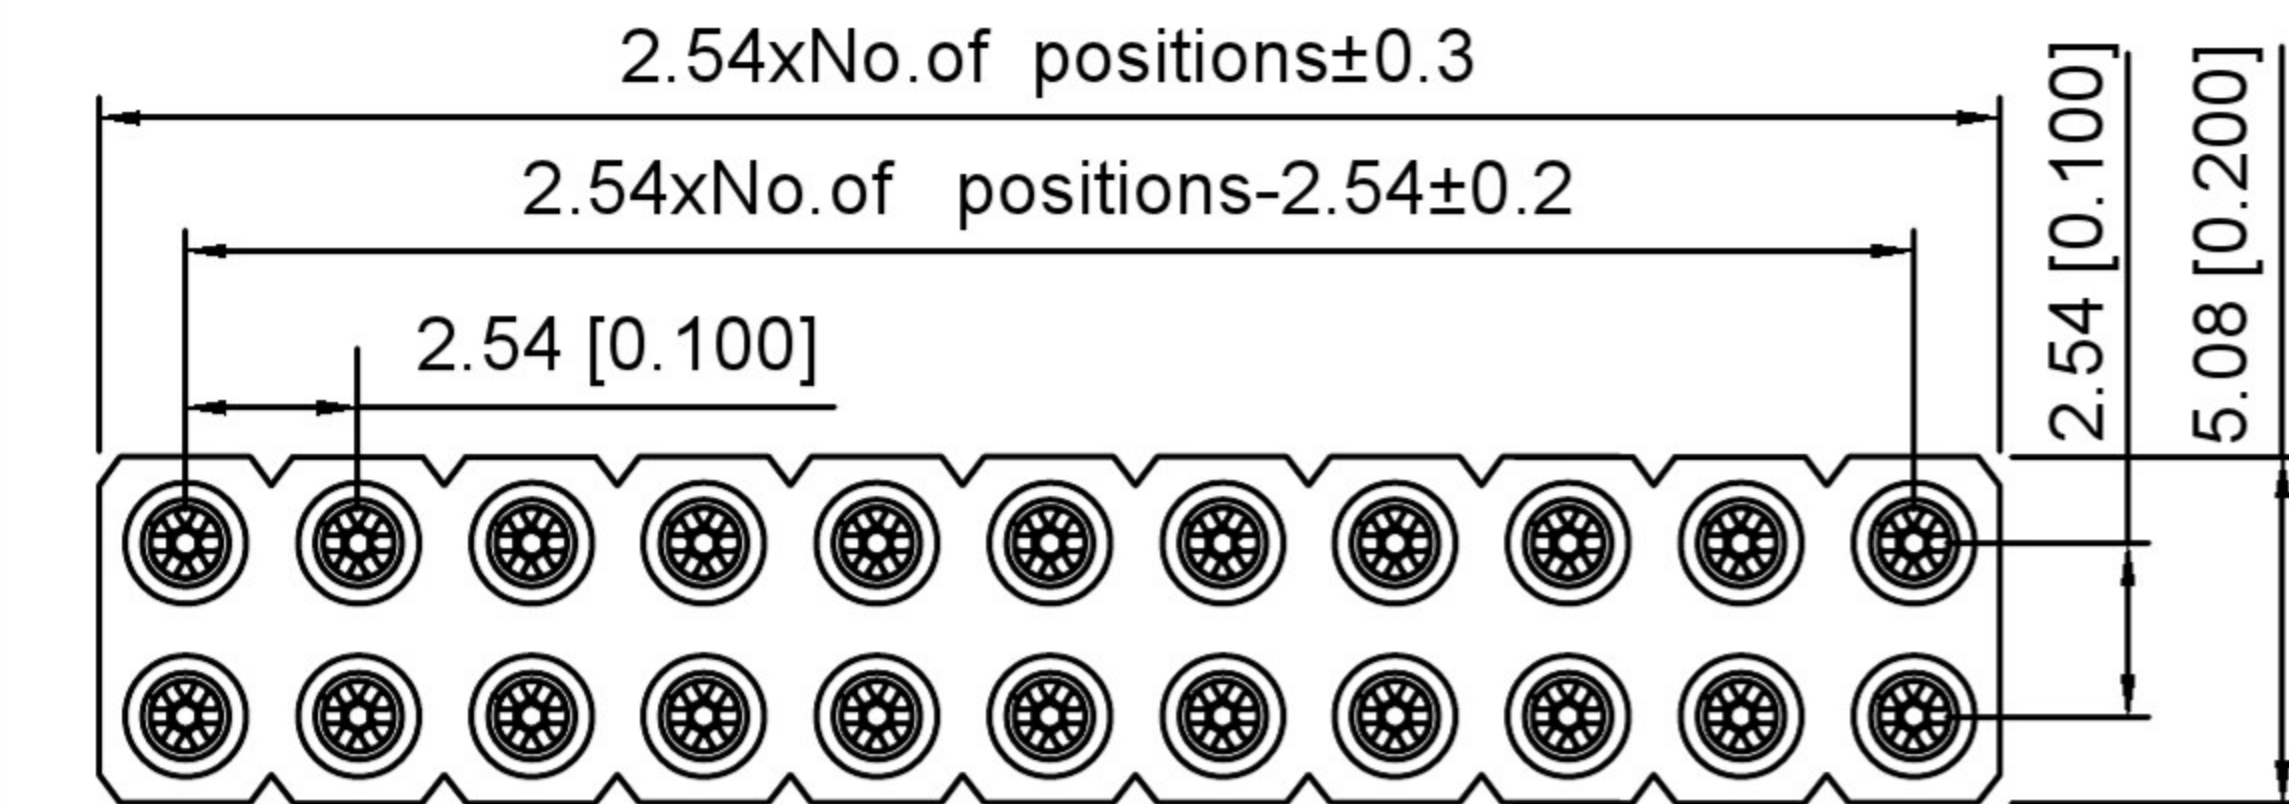

Recommended P . C . B
Layout(±0.05)


Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
ClIp (Contact 6 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating PinØ:0.635/0.889mm
Forces:(polished steel gaugeØ0.66mm)
-Insertion:1.2N typ
-Withdrawal:0.6N typ
Mechanical Life:min 500 cycles
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operating temperature:-40 °C to +105°C
Soldering temperature:+255°C

X5521 F V -2xXX- C85 D30 - 1150
① ② ③ ④ ⑤ ⑥ ⑦





- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=8.5mm
- 6.Pin Length:D=3.0mm
- 7.1150:Type1150

X5521FV-2xXX-C85D30-1150	PPS	Brass	X5521W
PART NO	Material	Material(Pin)	Suitable Wafer

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_10			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

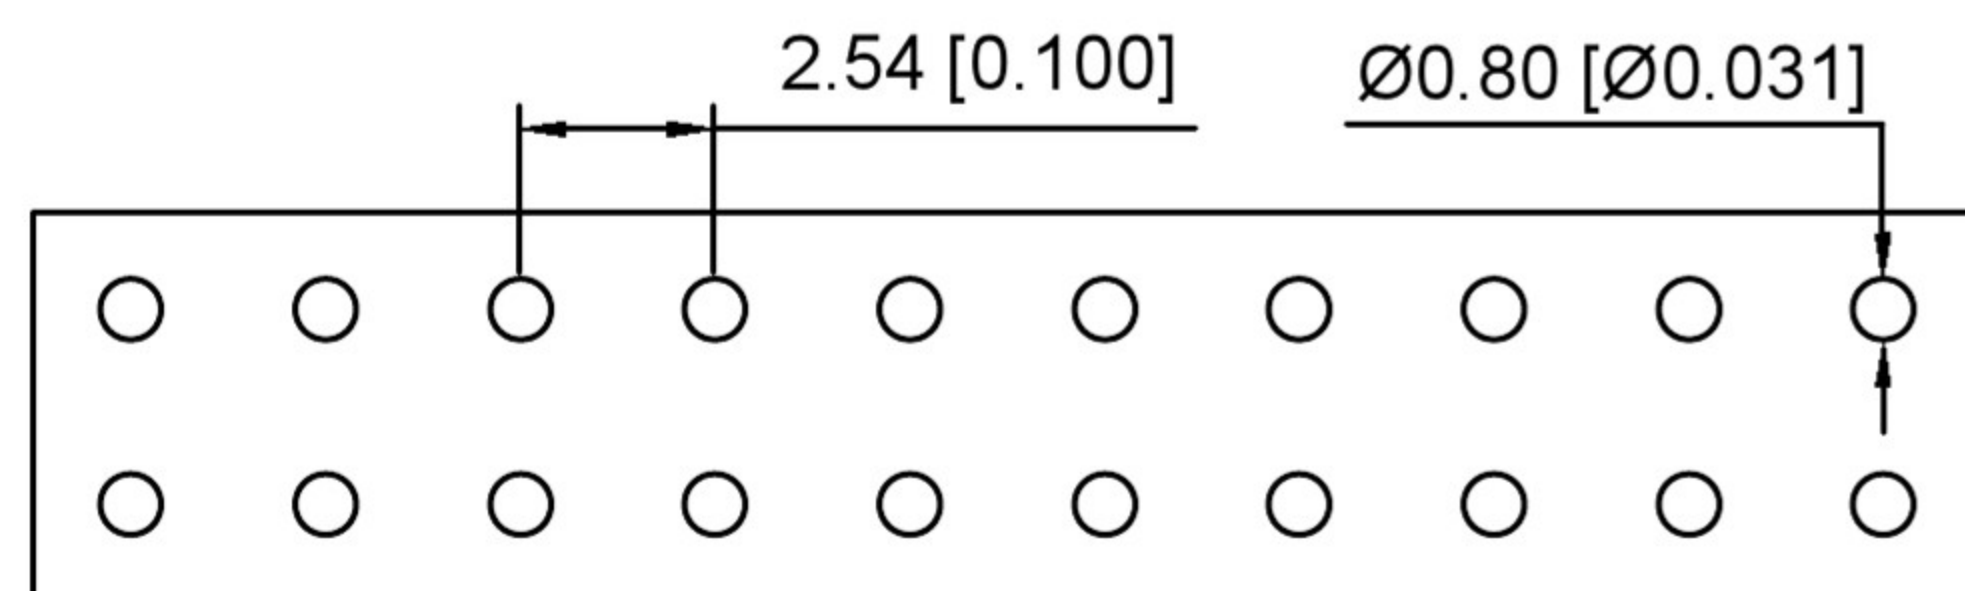

						 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_11			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

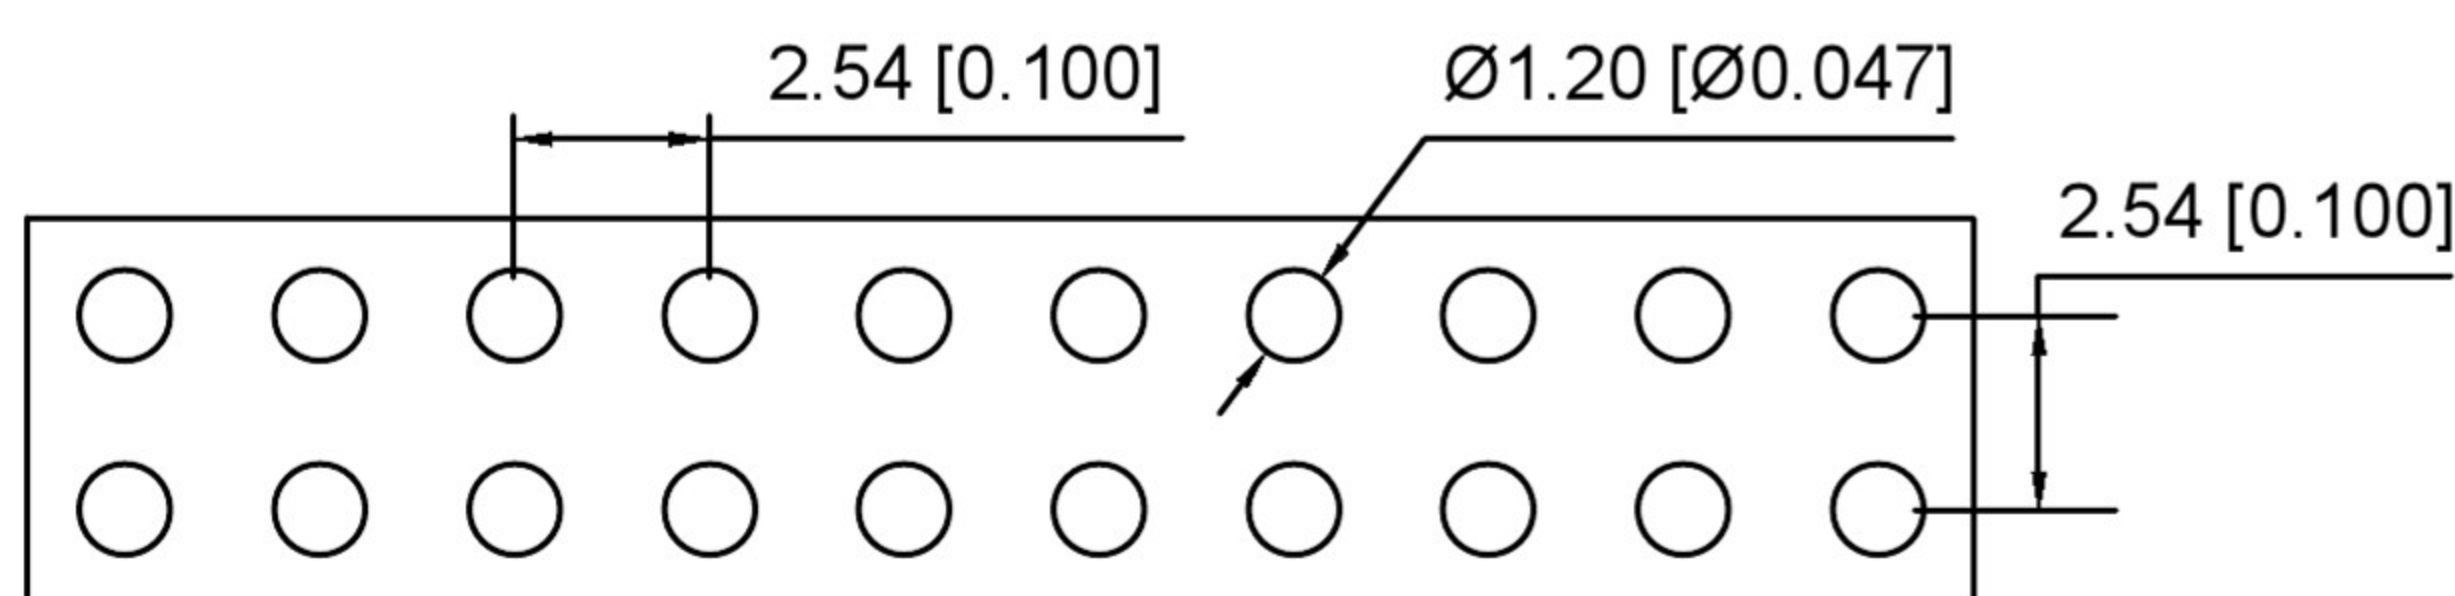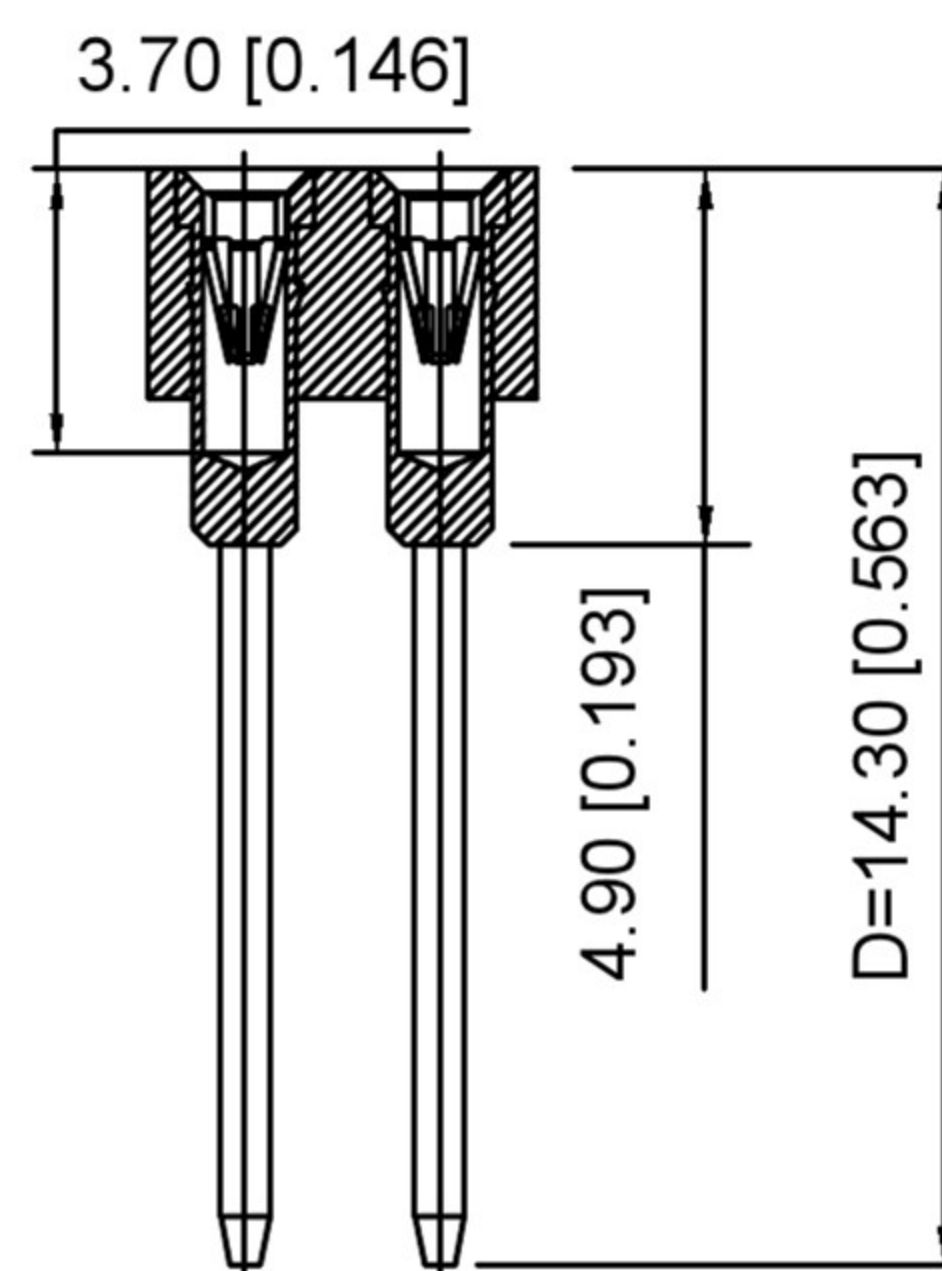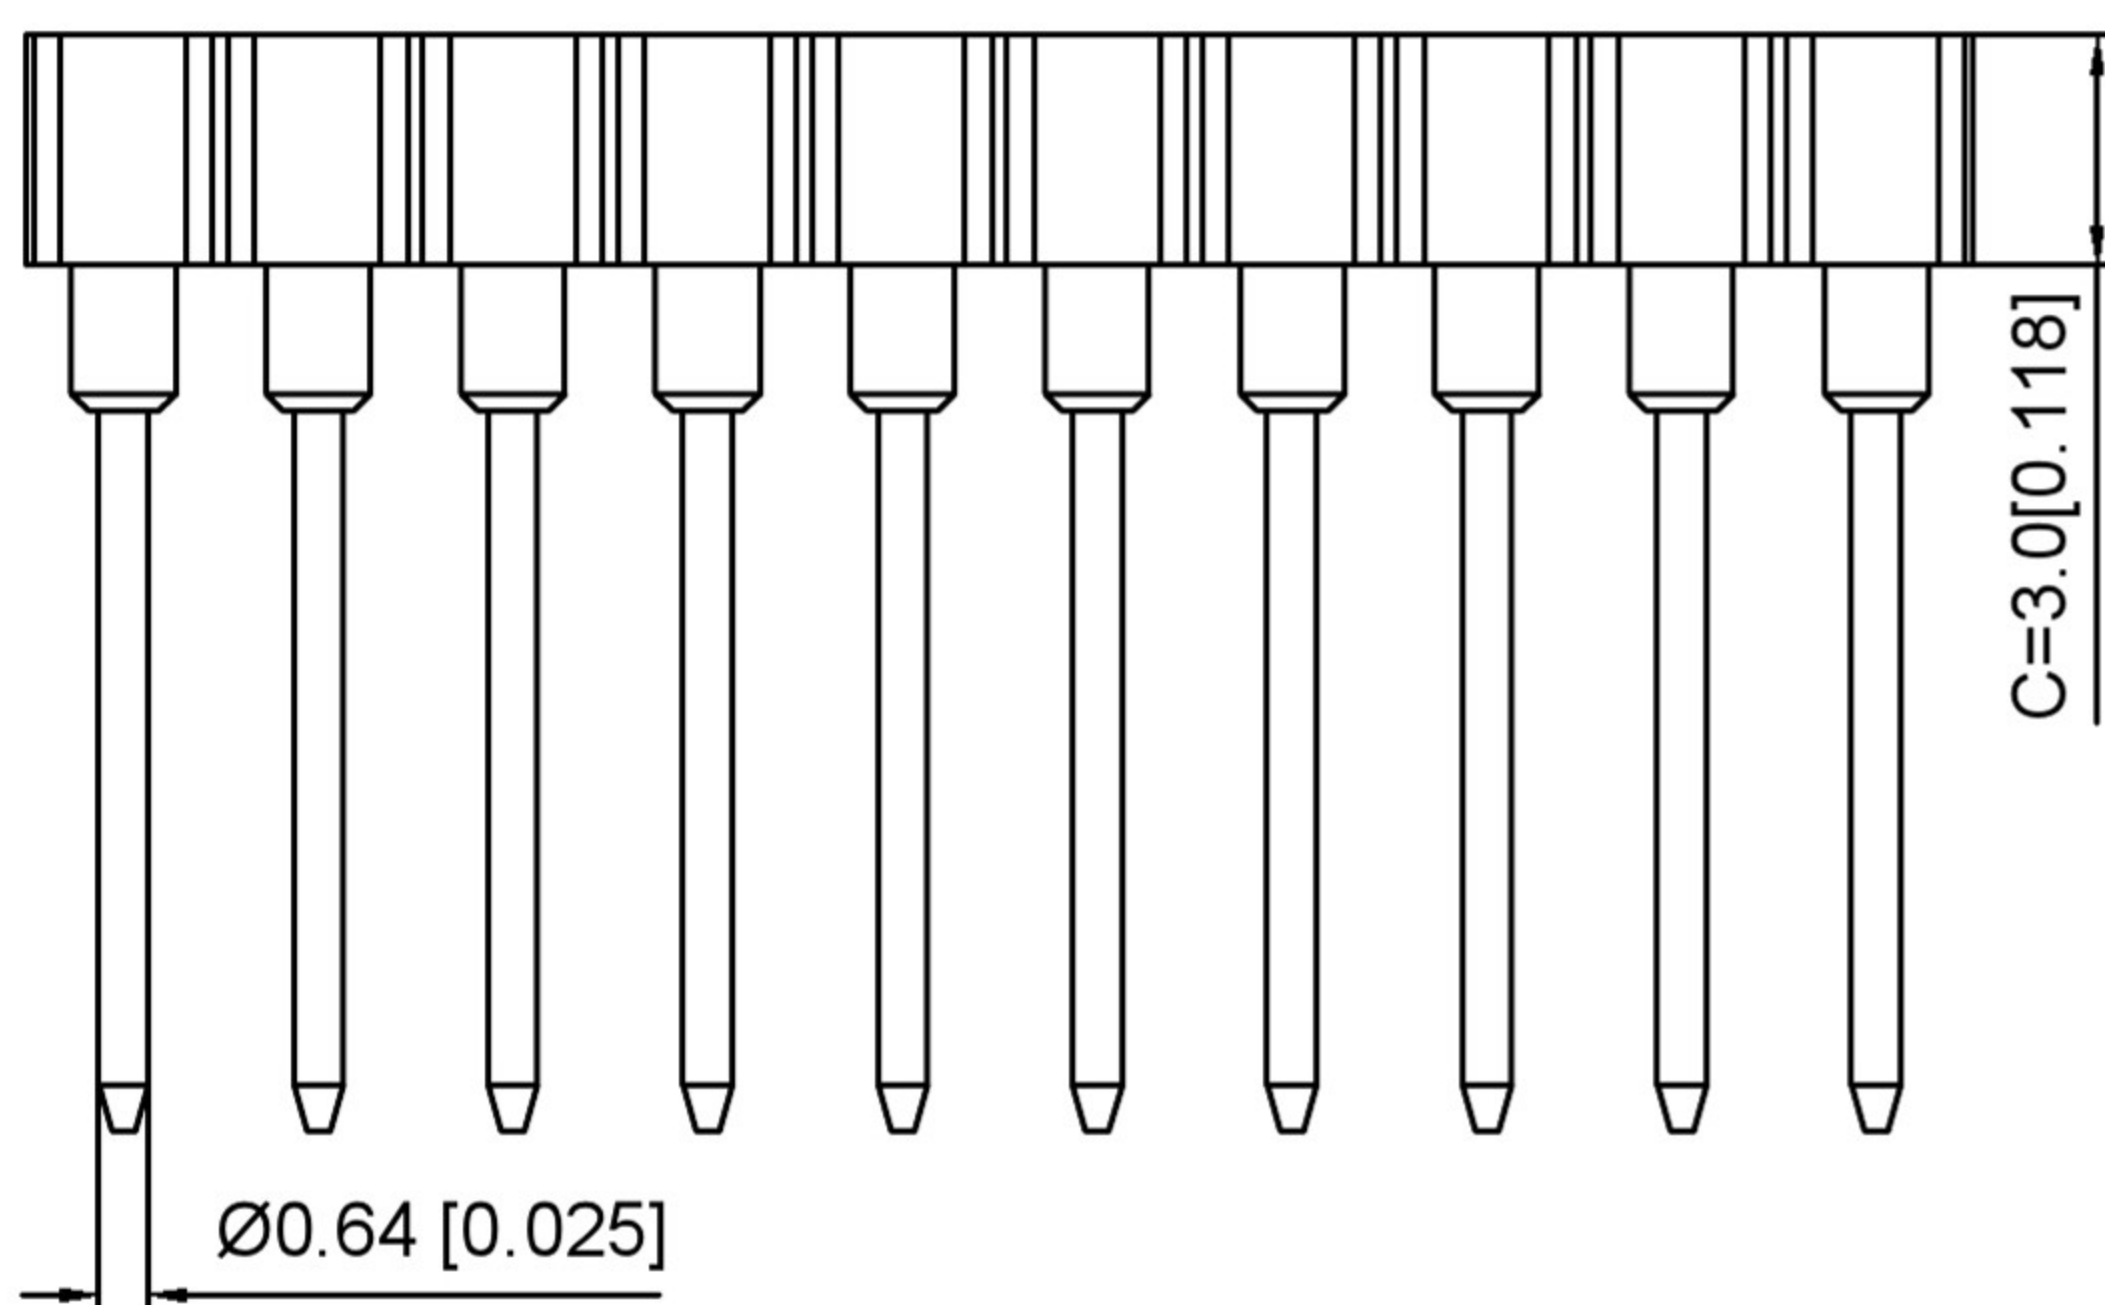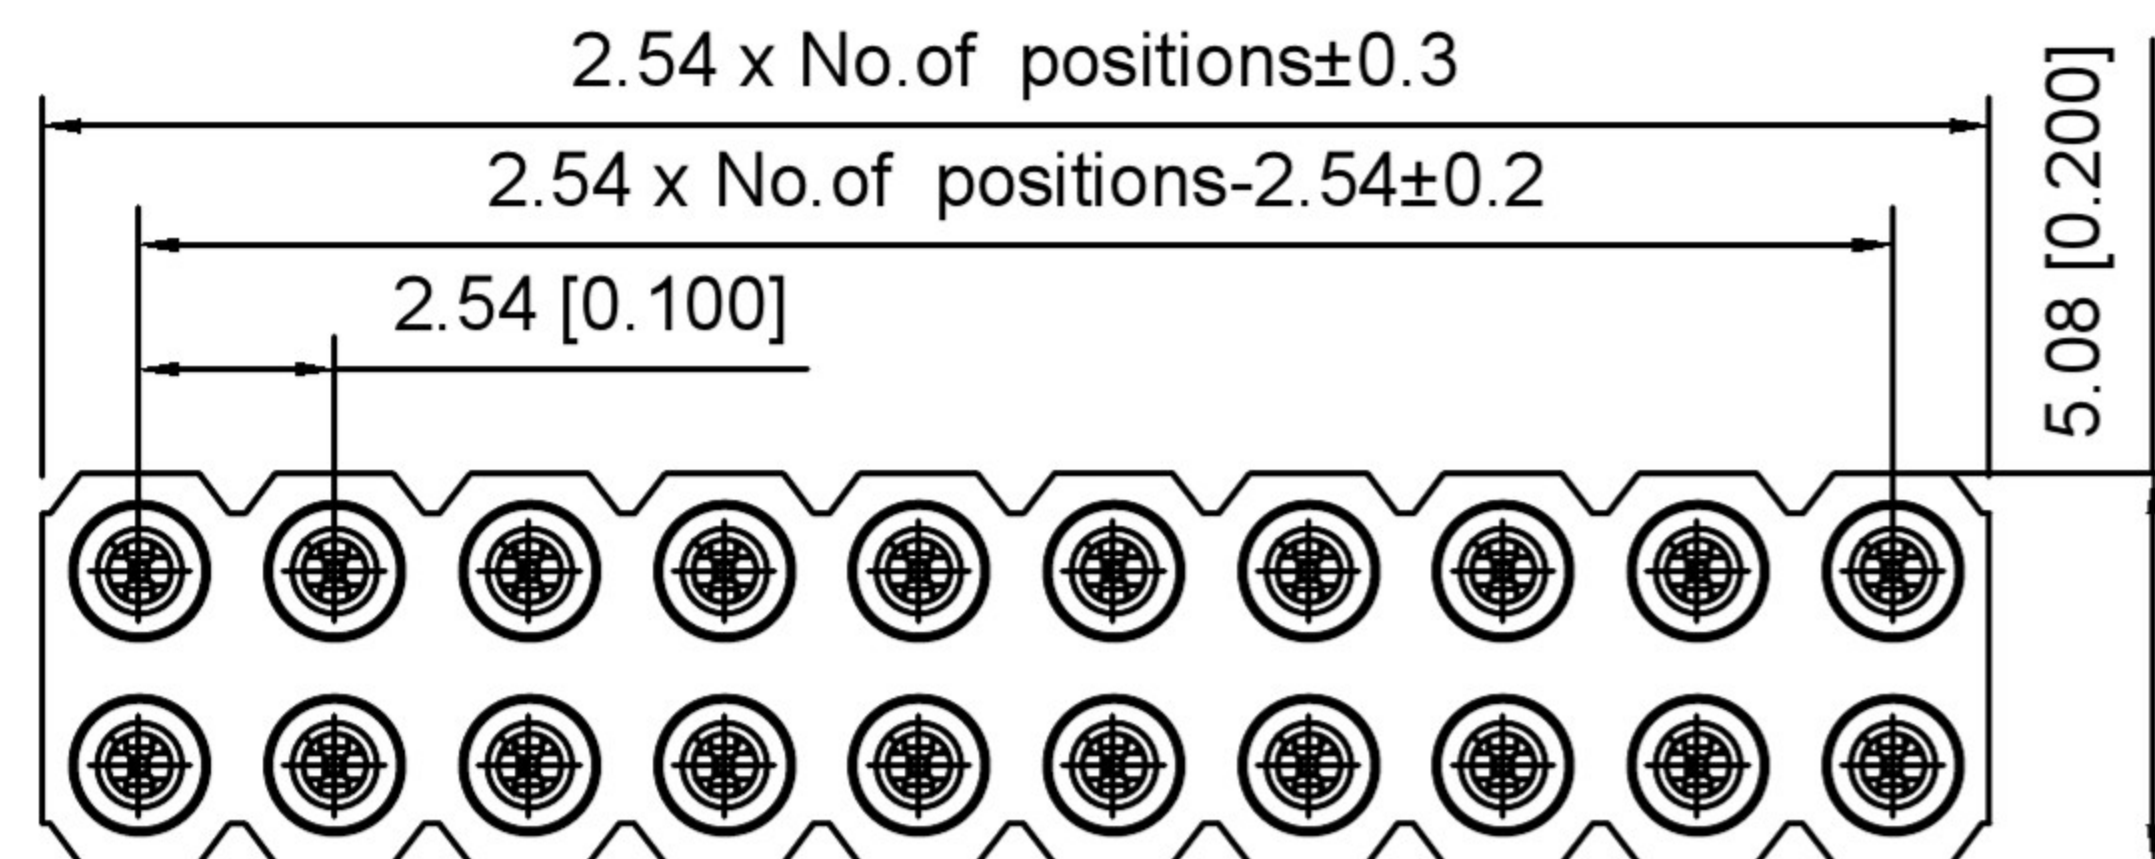

Recommended P.C.B
Layout(±0.05)

Technical Data




Pin(outer sleeve):Brass,machined CuZn38pb2
 Clp (Contact 4 Finger):Beryllium copper,heat teated
 Insulator:PPS UL94V-0 colour:black
 Current rating:3Amps
 Mating PinØ:0.38/0.56mm
 Forces:(polished steel gaugeØ0.43mm)
 -Insertion:2N typ
 -Withdrawal:1N typ
 Mechanical Life:min 500 cycles
 Contact resistance: 10mΩ max
 Dielectric strength:1000V
 Operating temperature:-40 °C to +105 °C
 Soldering temperature:+255 °C

X5521 F V -2xXX- C30 D1430 - 1430
 ① ② ③ ④ ⑤ ⑥ ⑦


- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=3.0mm
- 6.Pin Length:D=14.30mm
- 7.1430:Type1430

X5521FV-2xXX-C30D1430-1430	PPS	Brass	X5521W
PART NO	Material	Material(Pin)	Suitable Wafer

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR					
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_12					
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:					
				4 < L ≤ 16	±0.3		APPD		SIZE: A4						
				16 < L ≤ 63	±0.4										
				L > 63	±0.5										
					DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com														1/1	A0

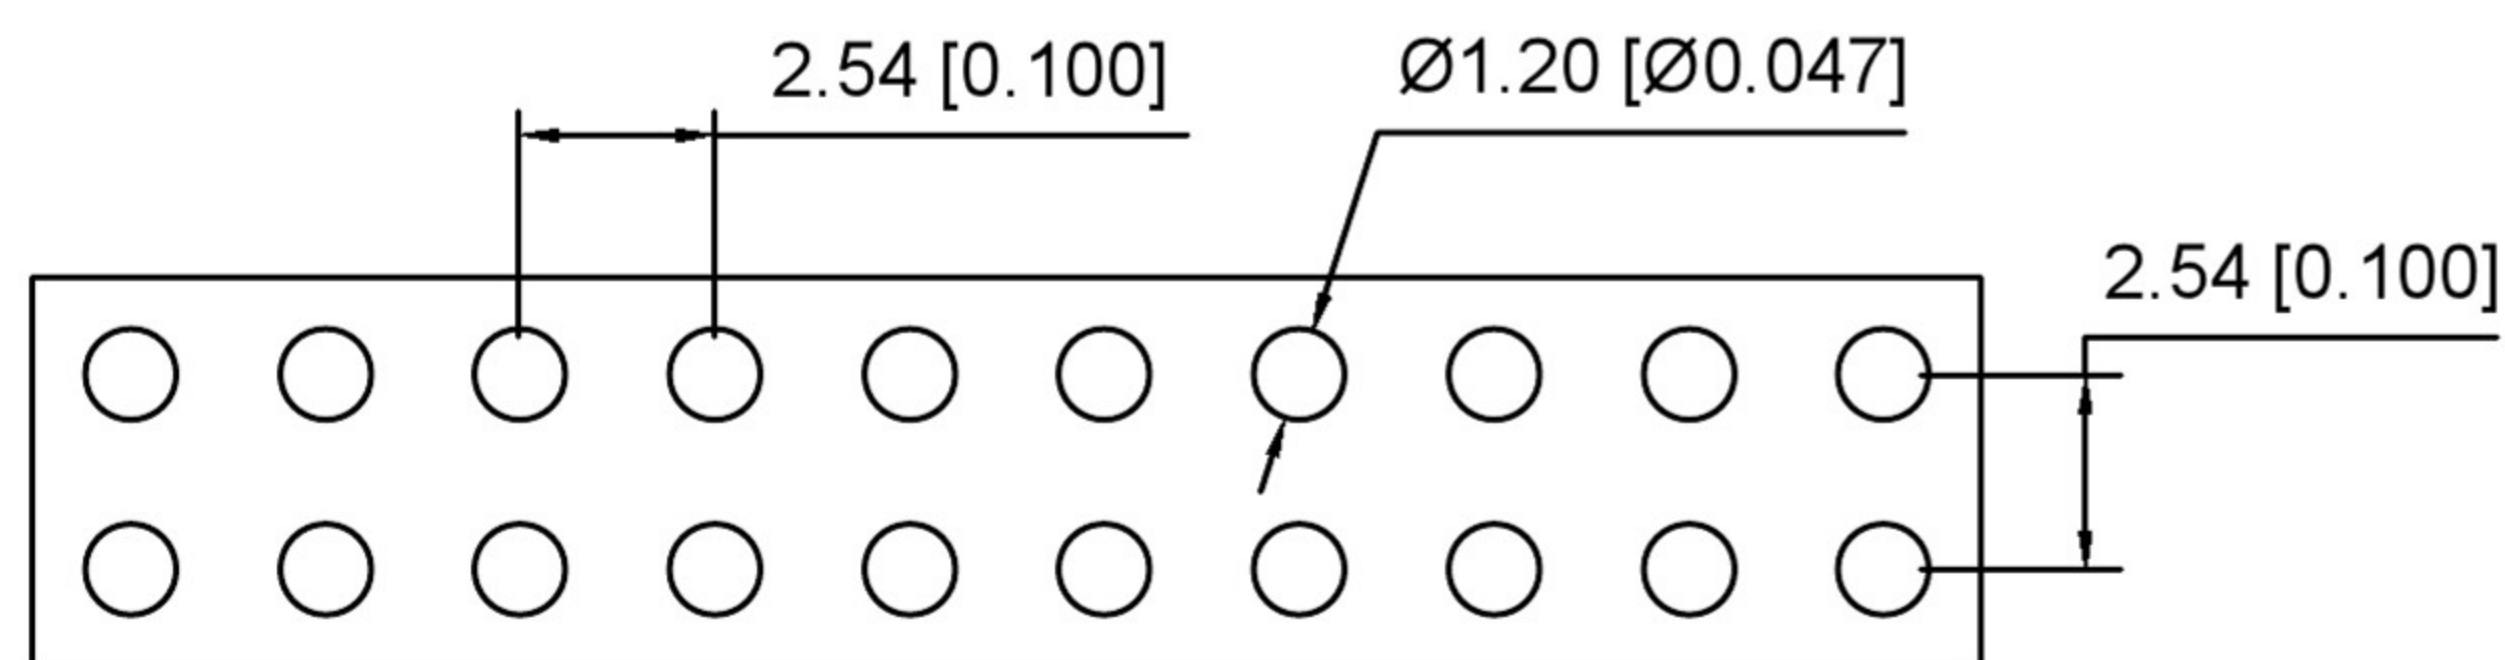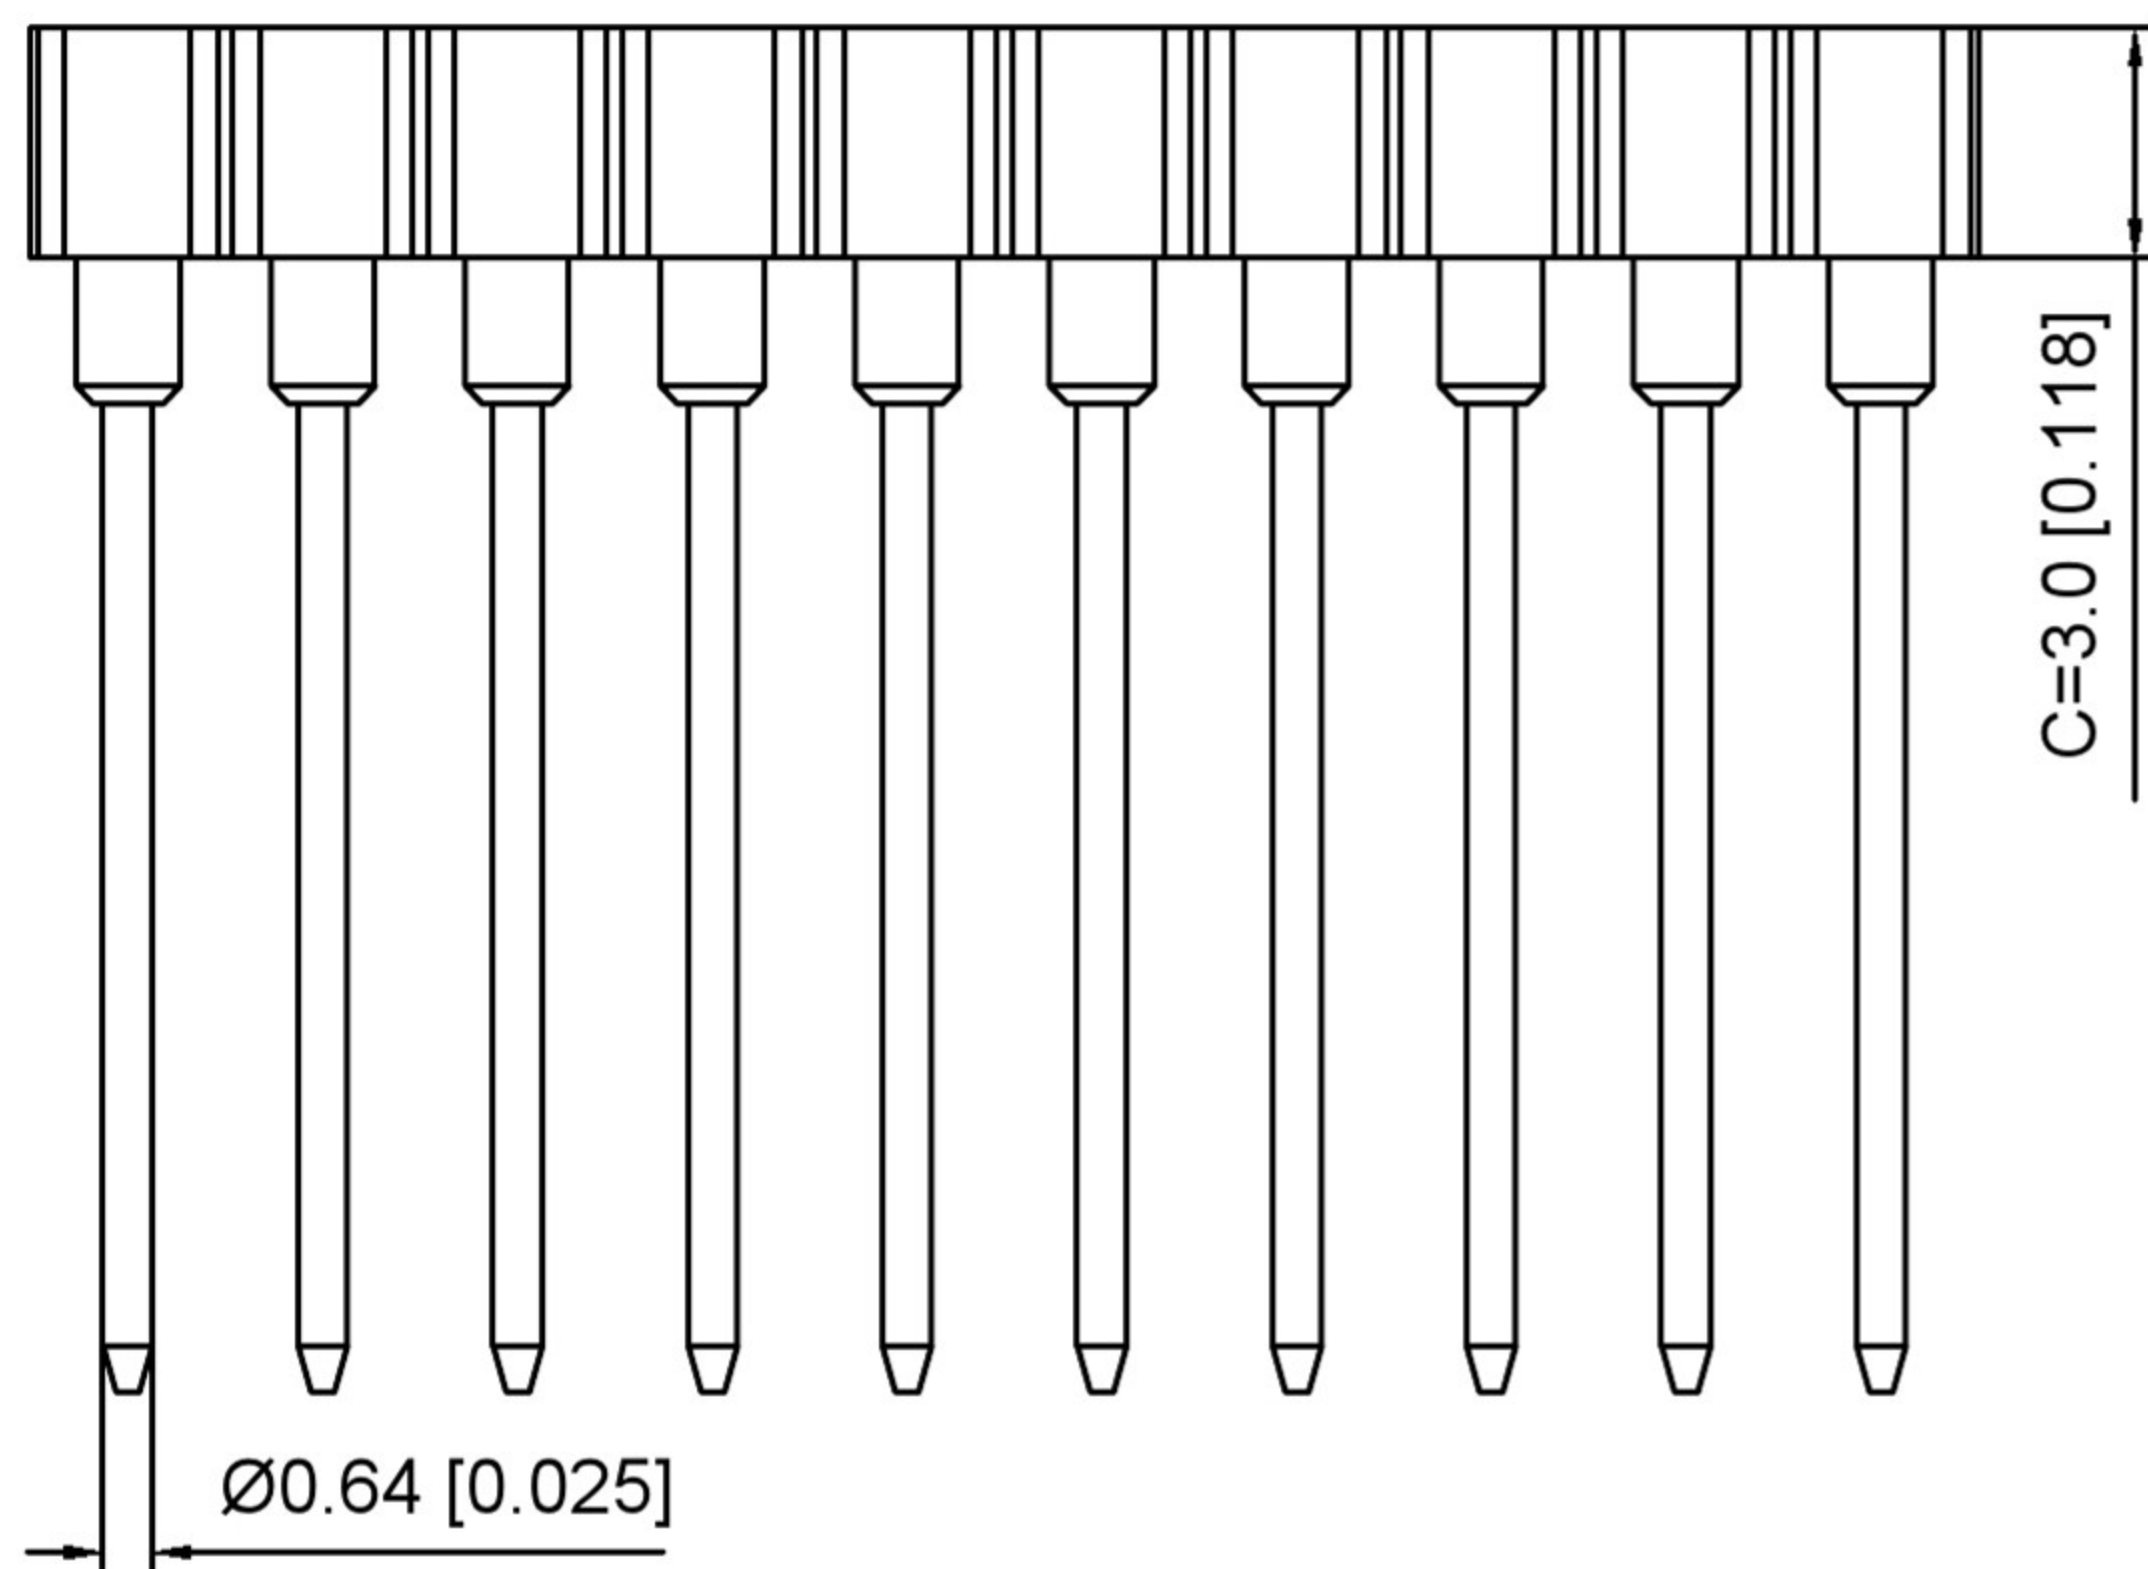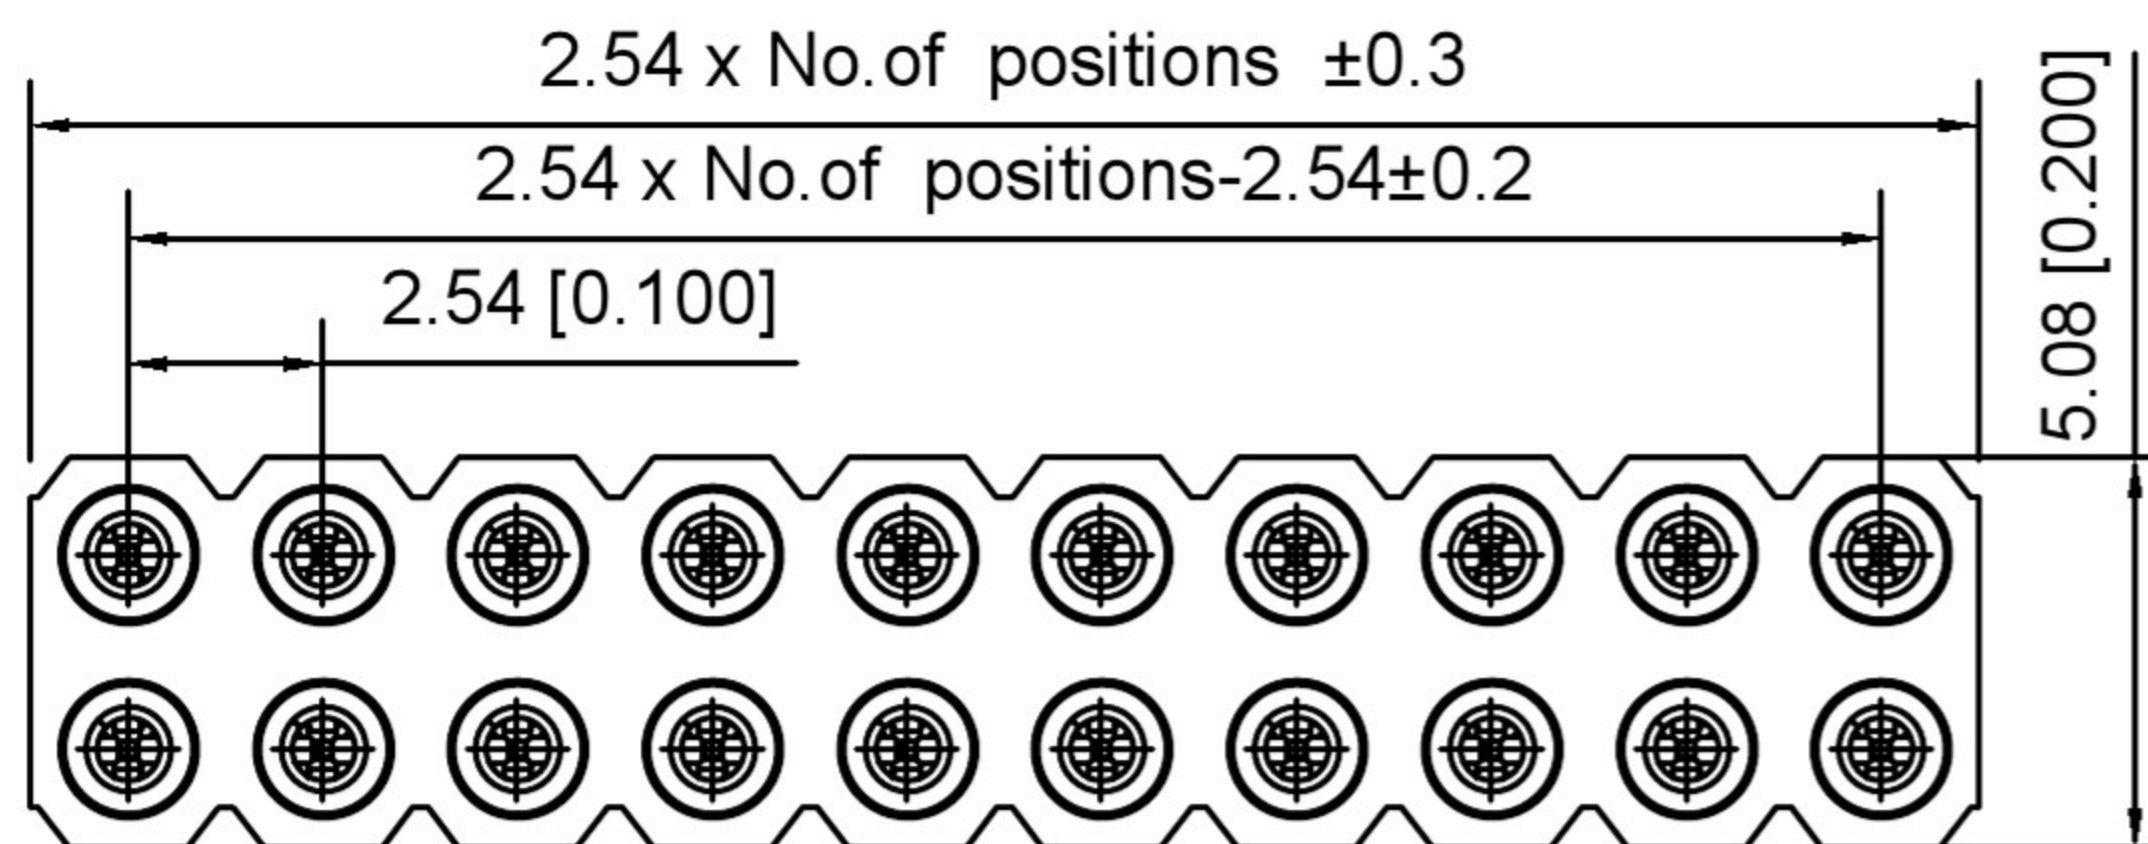

Recommended P. C. B
Layout(±0.05)

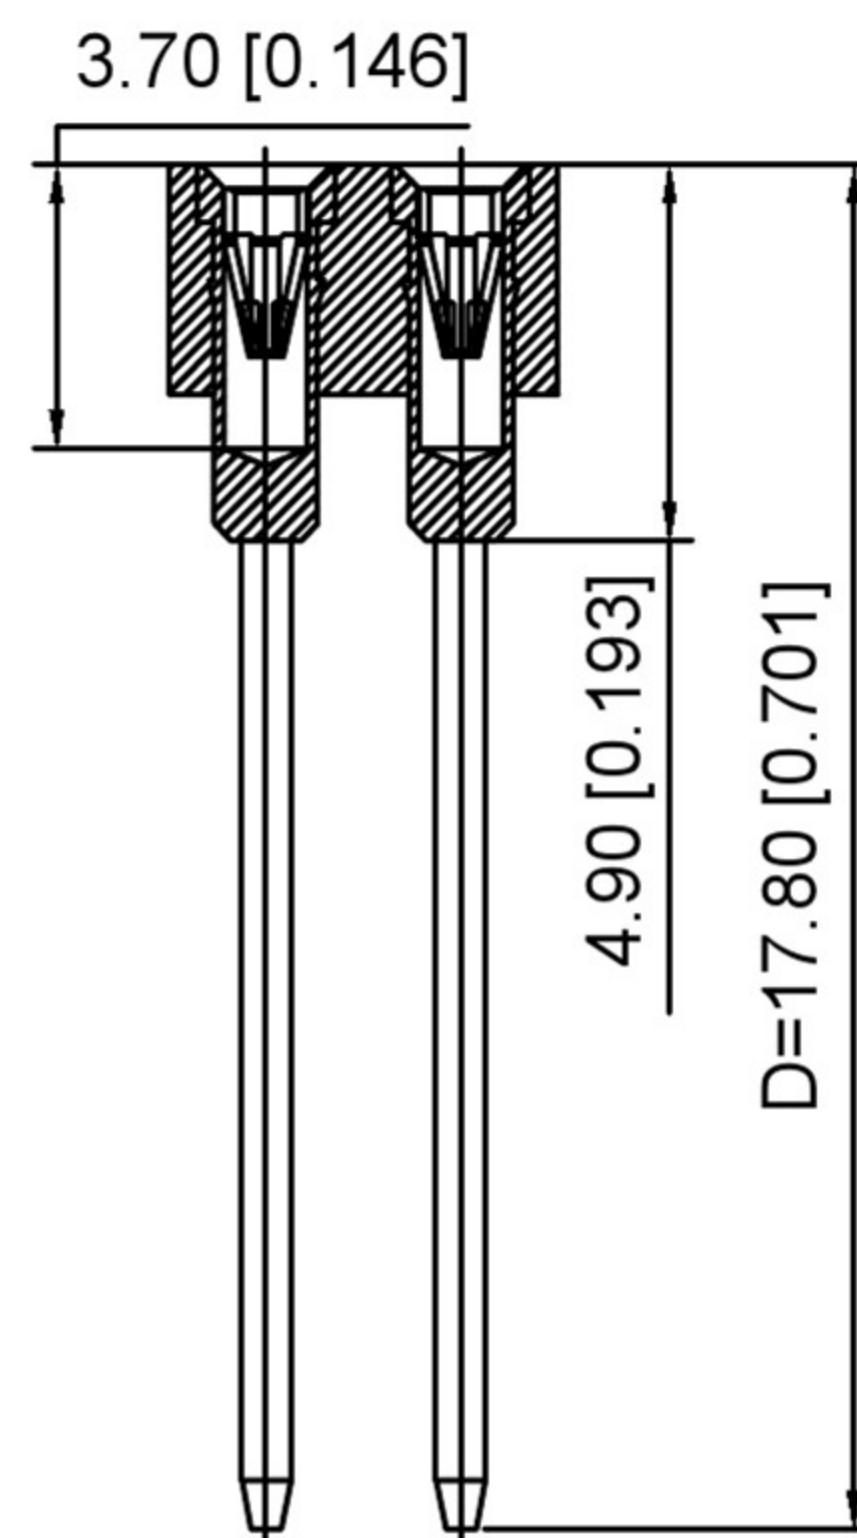

Technical Data





Pin(outer sleeve):Brass,machined CuZn38pb2
 Cllp (Contact 4 Flinger):Beryllium copper,heat teated
 Insulator:PPS UL94V-0 colour:black
 Current rating:3Amps
 Mating PinØ:0.38/0.56mm
 Forces:(polished steel gaugeØ0.43mm)
 -Insertion:2N typ
 -Withdrawal:1N typ
 Mechanical Life:min 500 cycles
 Contact resistance: 10mΩ max
 Dielectric strength:1000V
 Operating temperature:-40 °C to +105 °C
 Soldering temperature:+255 °C

X5521 F V -2xXX- C30 D1780 - 1780
 ① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=3.0mm
- 6.Pin Length:D=17.80mm
- 7.1780:Type1780

X5521FV-2xXX-C30D1780-1780	PPS	Brass	X5521W
PART NO	Material	Material(Pin)	Suitable Wafer

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_13				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED							
REVISIONS						UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0

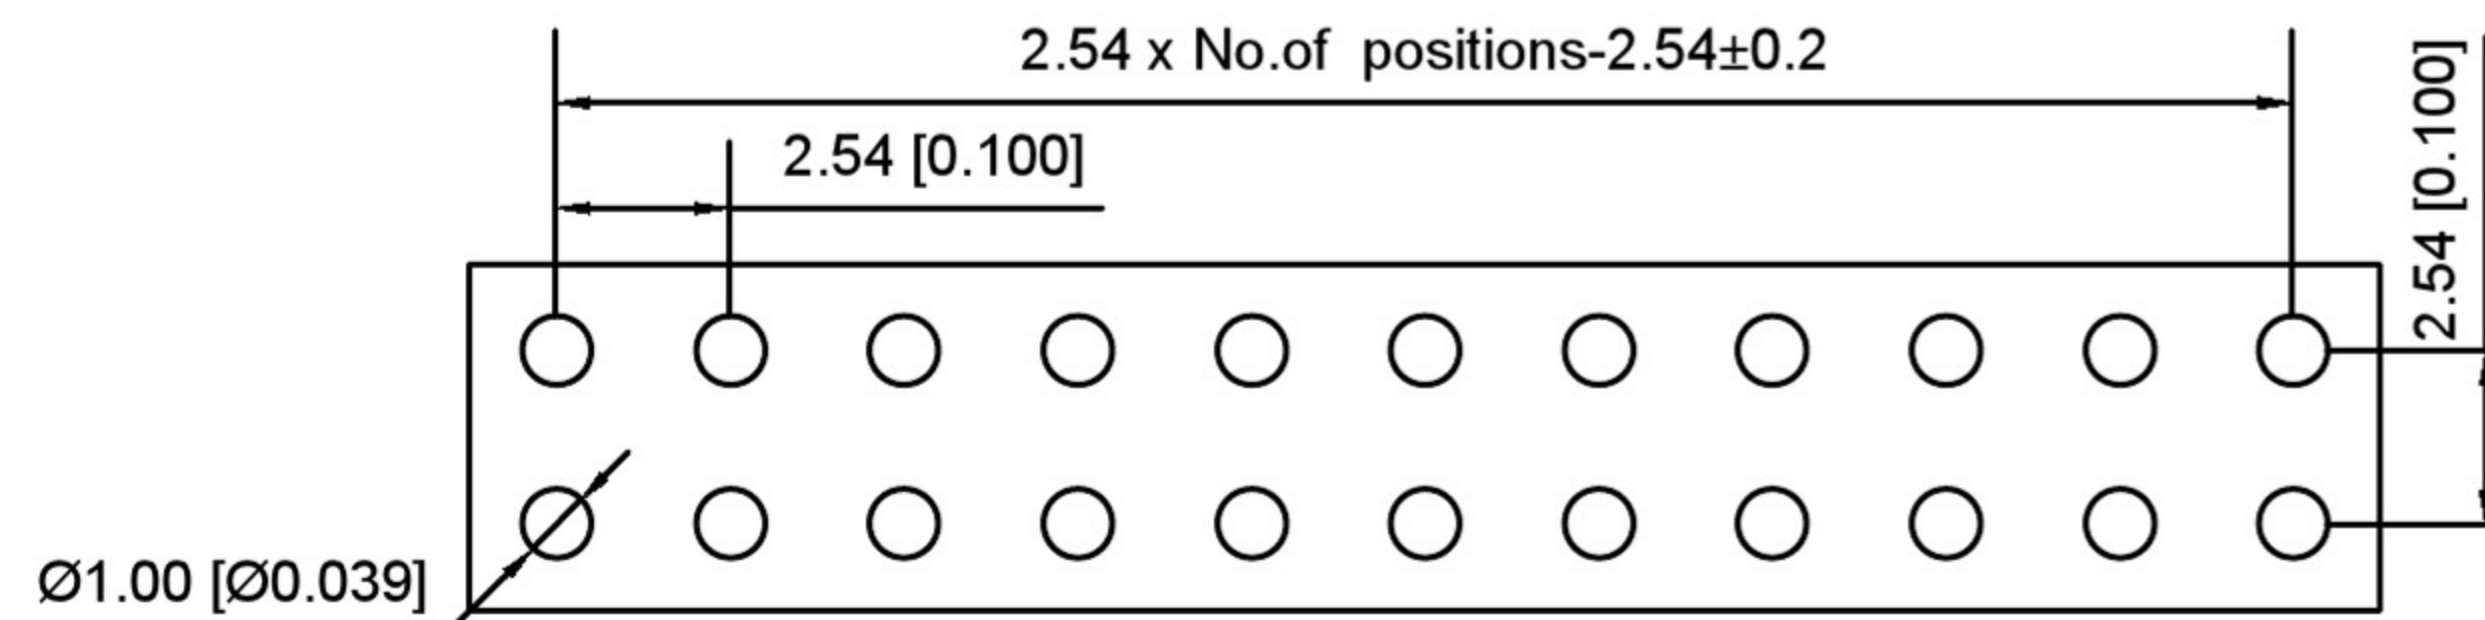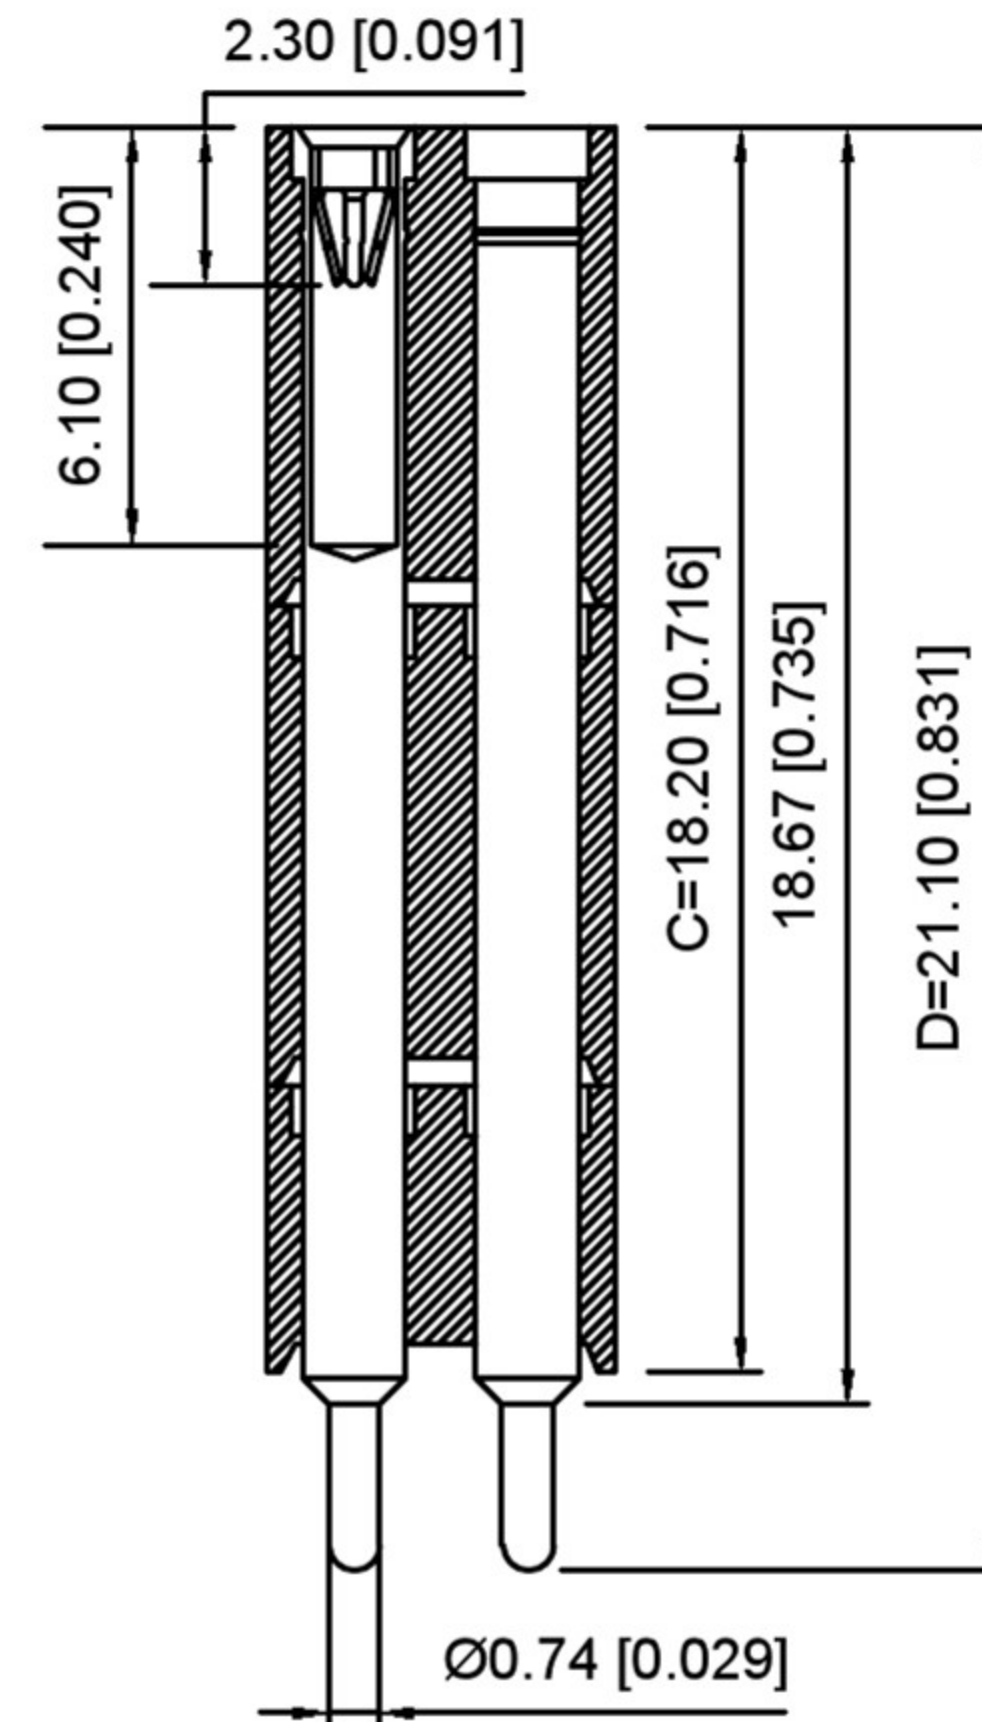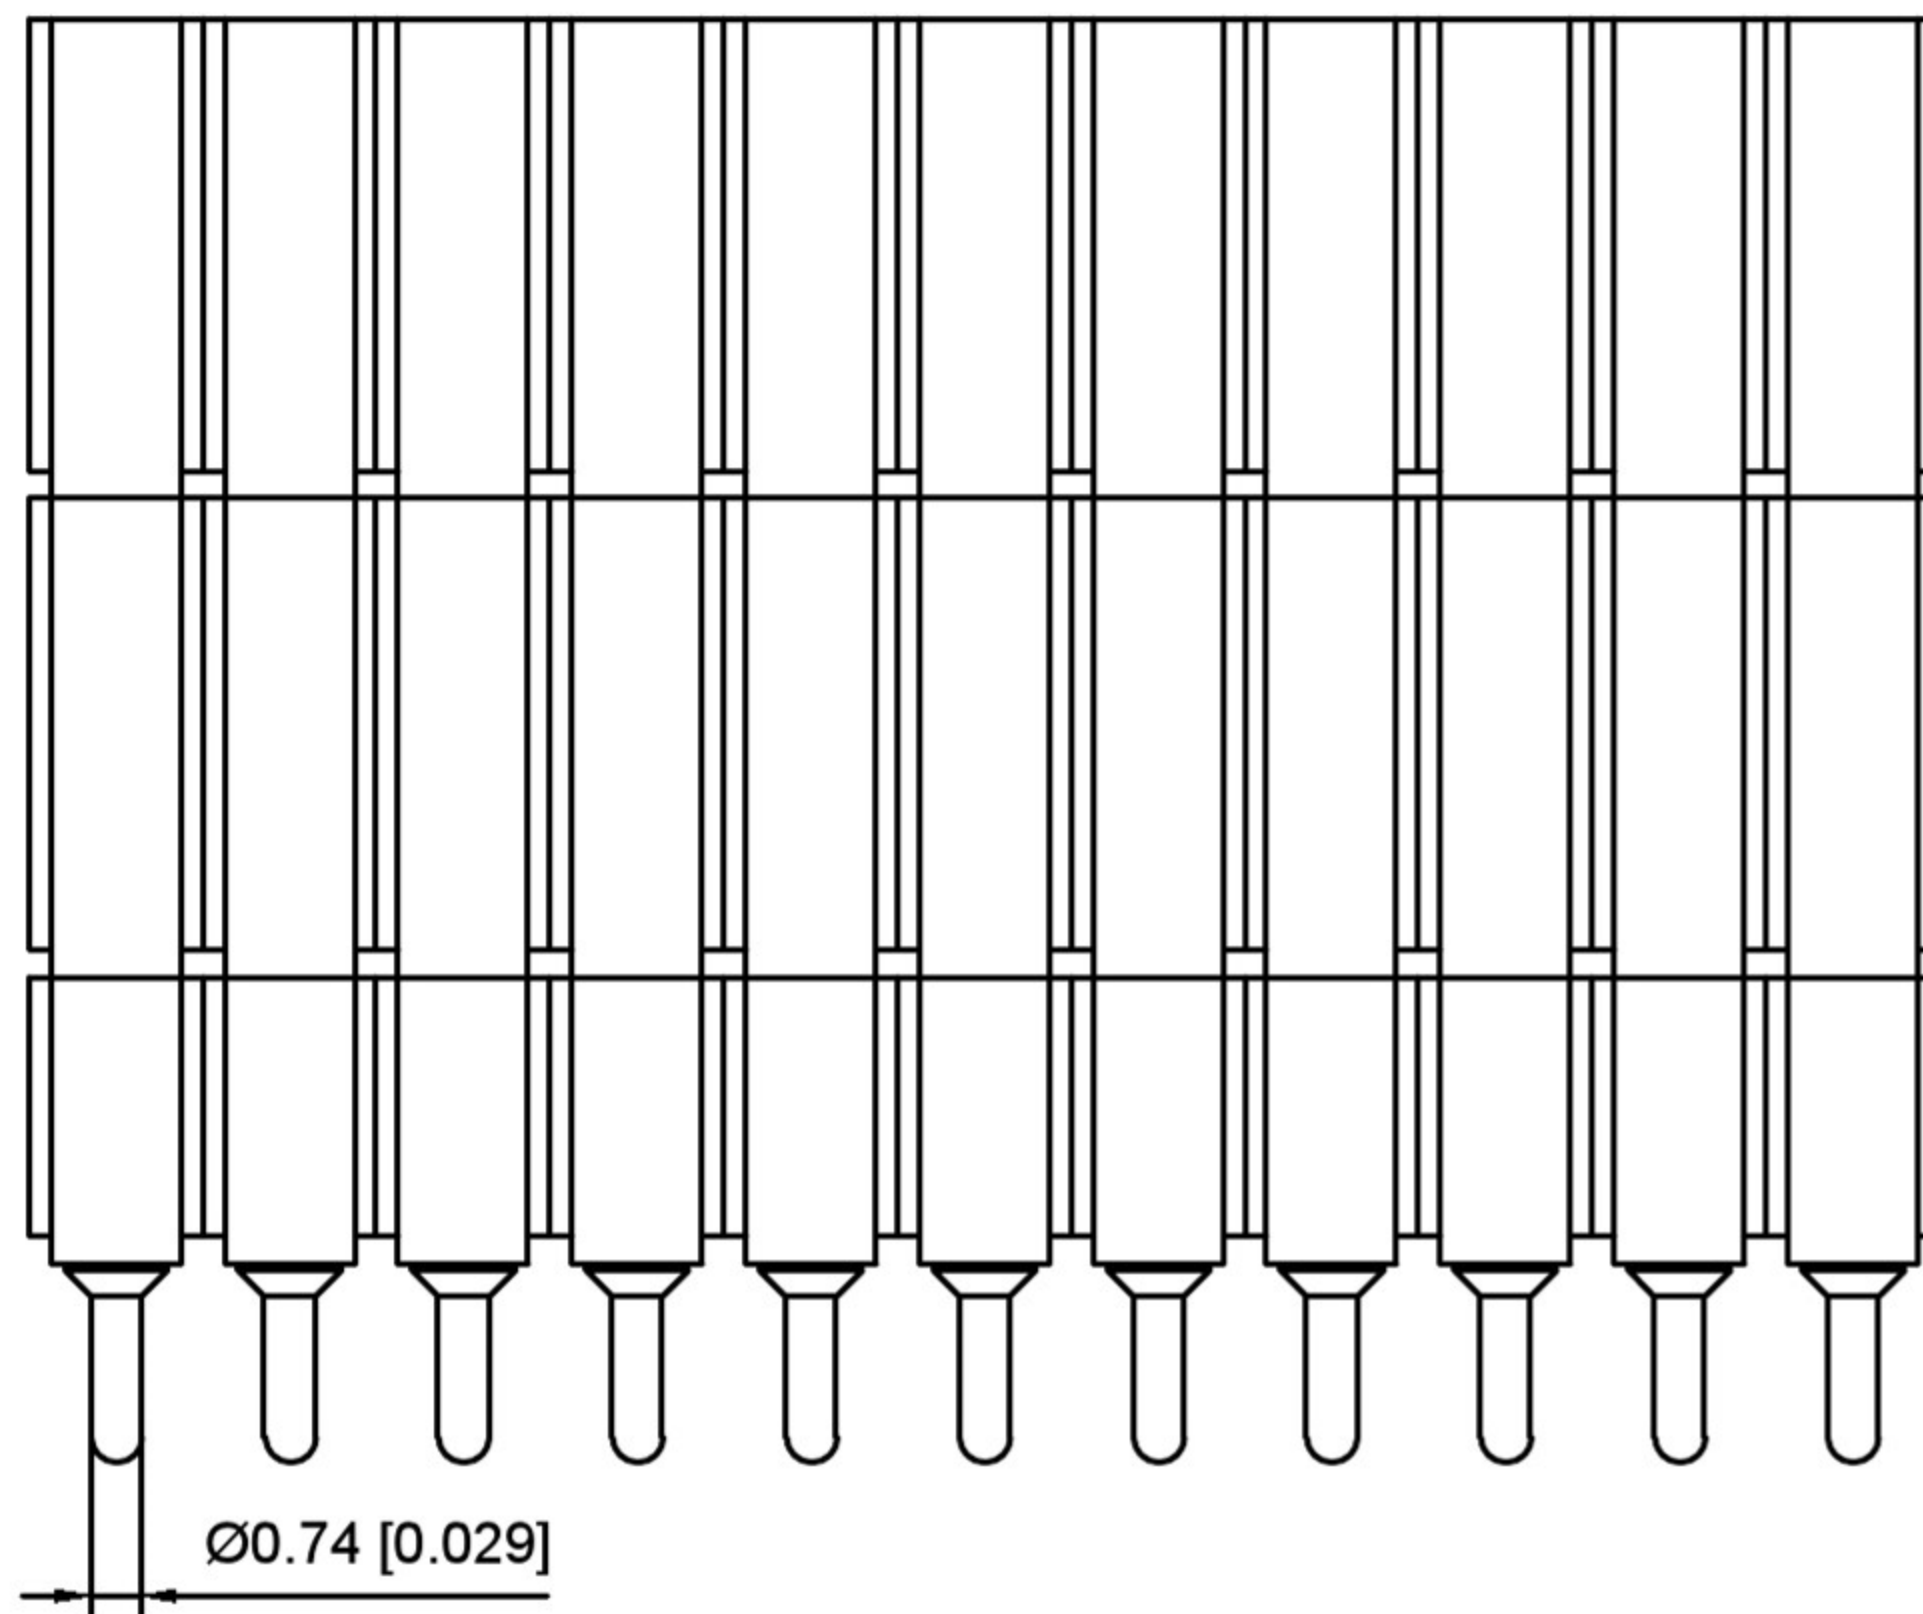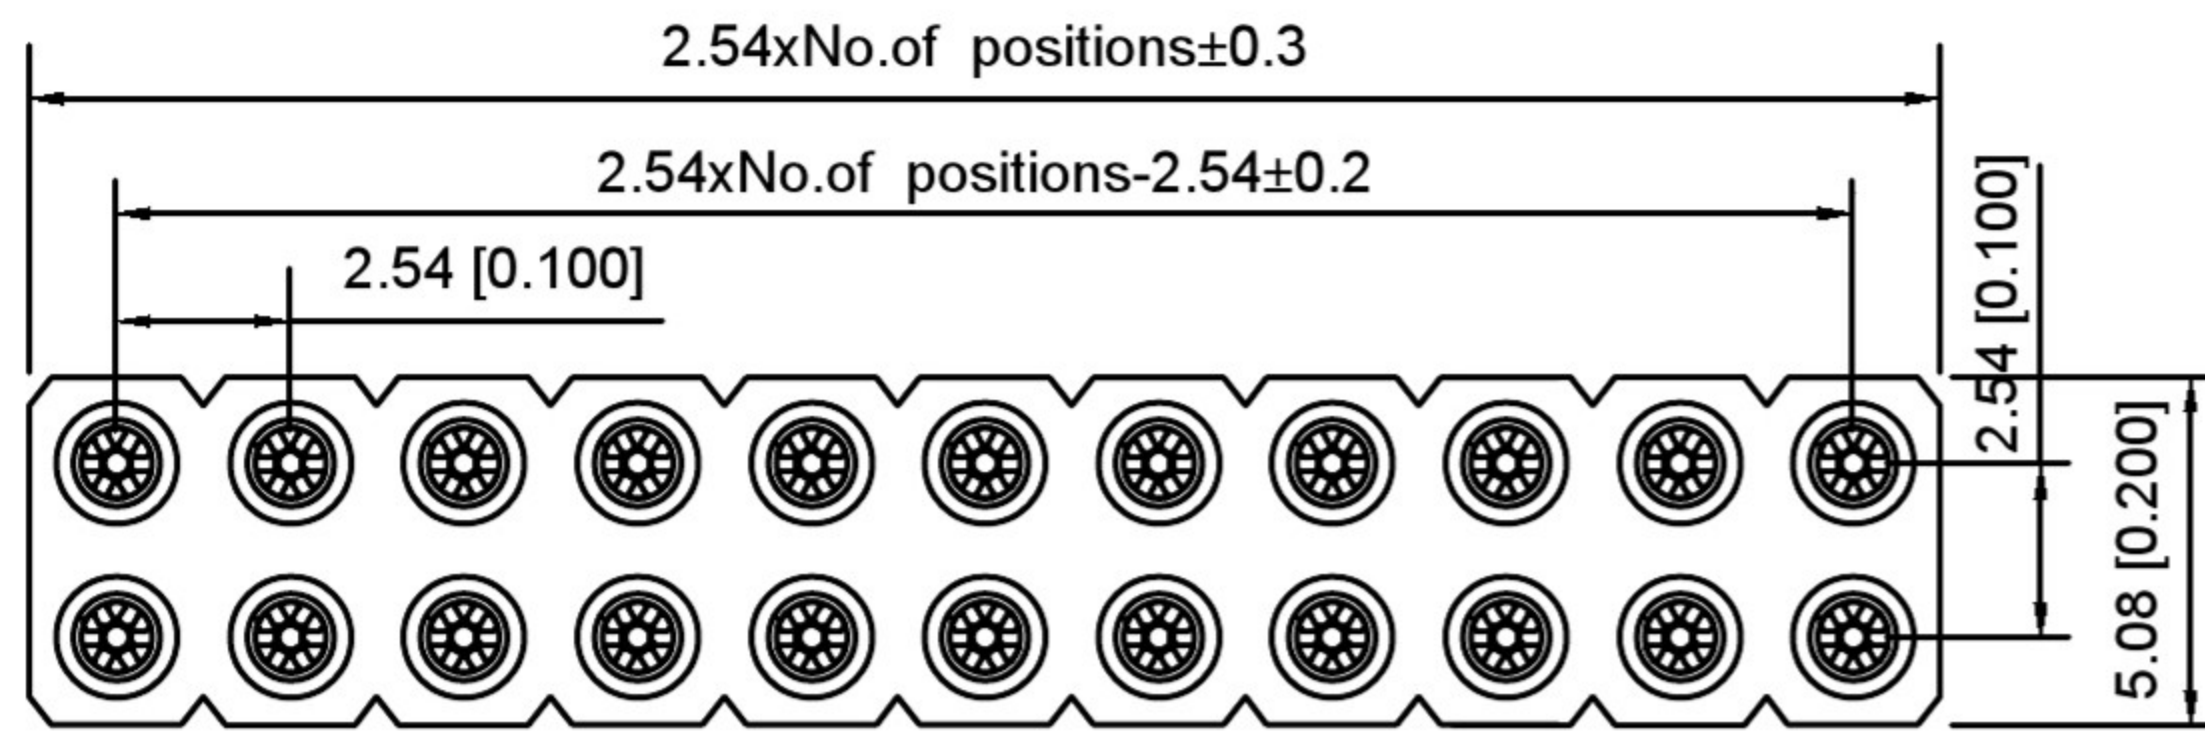


Recommended P . C . B
Layout(±0.05)



Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
Cllp (Contact 6 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating PinØ:0.635/0.889mm
Forces:(polished steel gaugeØ0.66mm)
-Insertion:1.2N typ
-Withdrawal:0.6N typ
Mechanical Life:min 500 cycles
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operating temperature:-40 °C to +105°C
Soldering temperature:+255°C

X5521 F V -2xXX- C1820 D2110 - 2110
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=18.20mm
- 6.Pin Length:D=21.10mm
- 7.2110:Type2110

X5521FV-2xXX-C1820D2110-2110	PPS	Brass	X5521W
PART NO	Material	Material(Pin)	Suitable Wafer

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_14		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16	±0.3		APPD		SIZE: A4			
				16 < L ≤ 63	±0.4							
				L > 63	±0.5							
					DATE	REVISED	APPROVED					
REVISIONS						UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			
www.alpsr.com www.gdxjdz.com www.xbswitch.com										WEIGHT	SHEET	REVISION
											1/1	A0

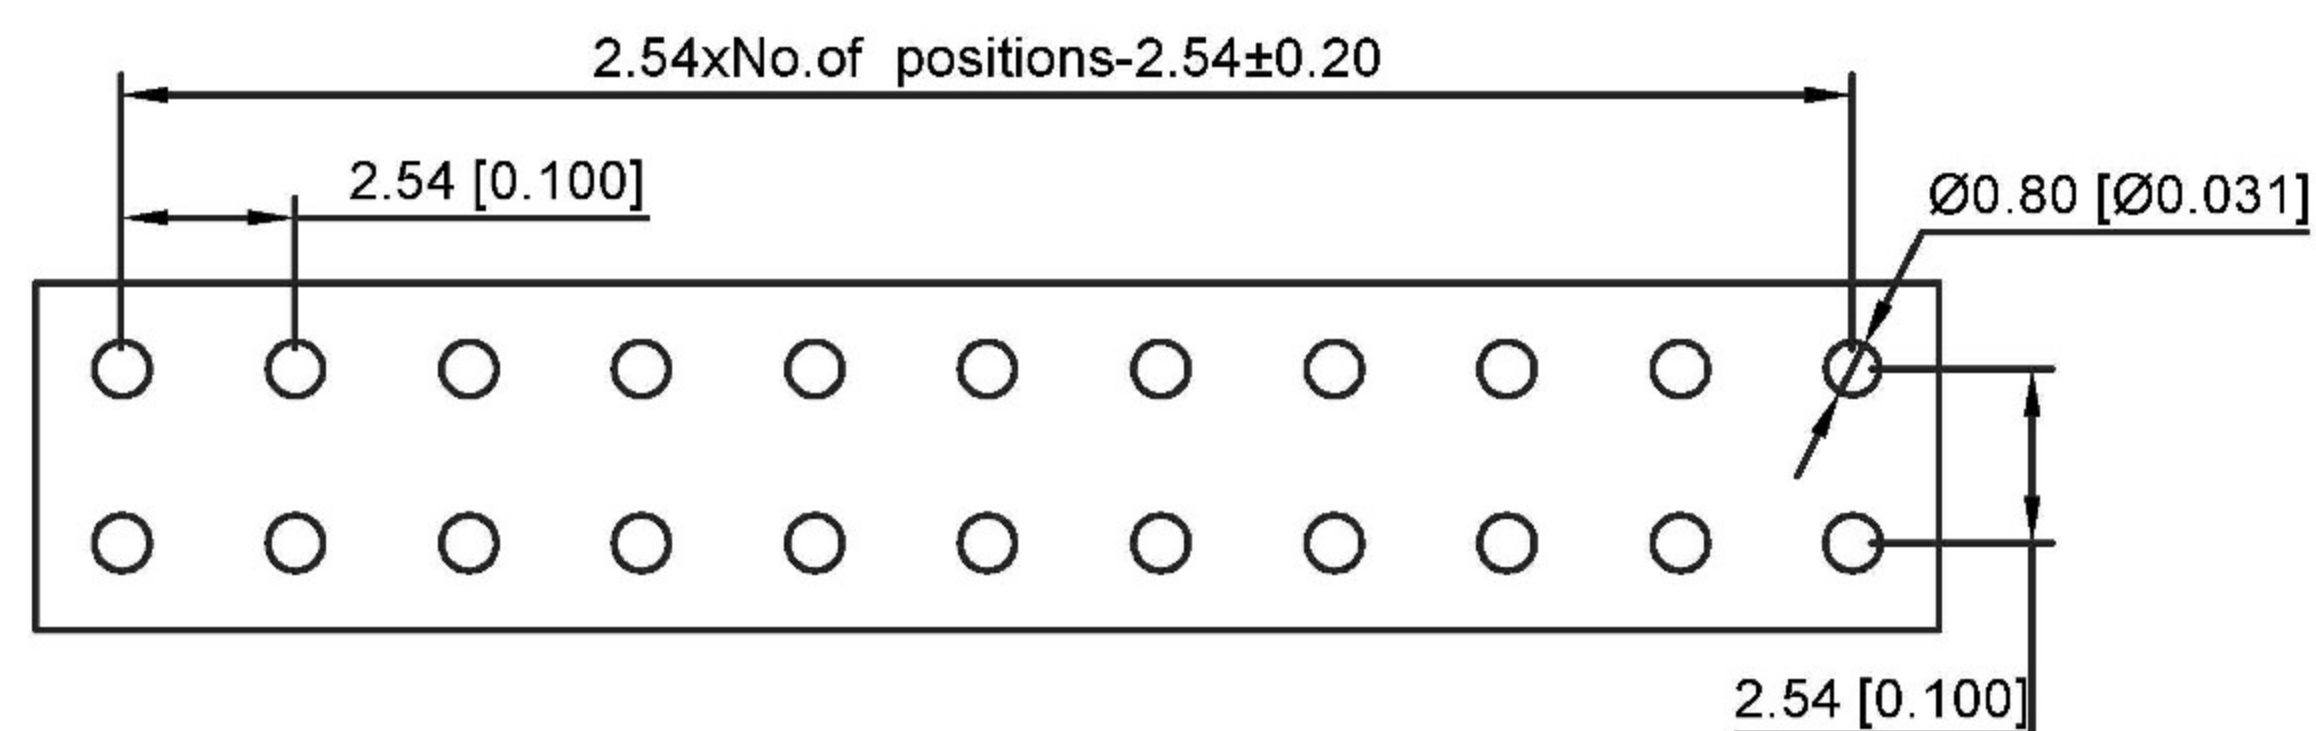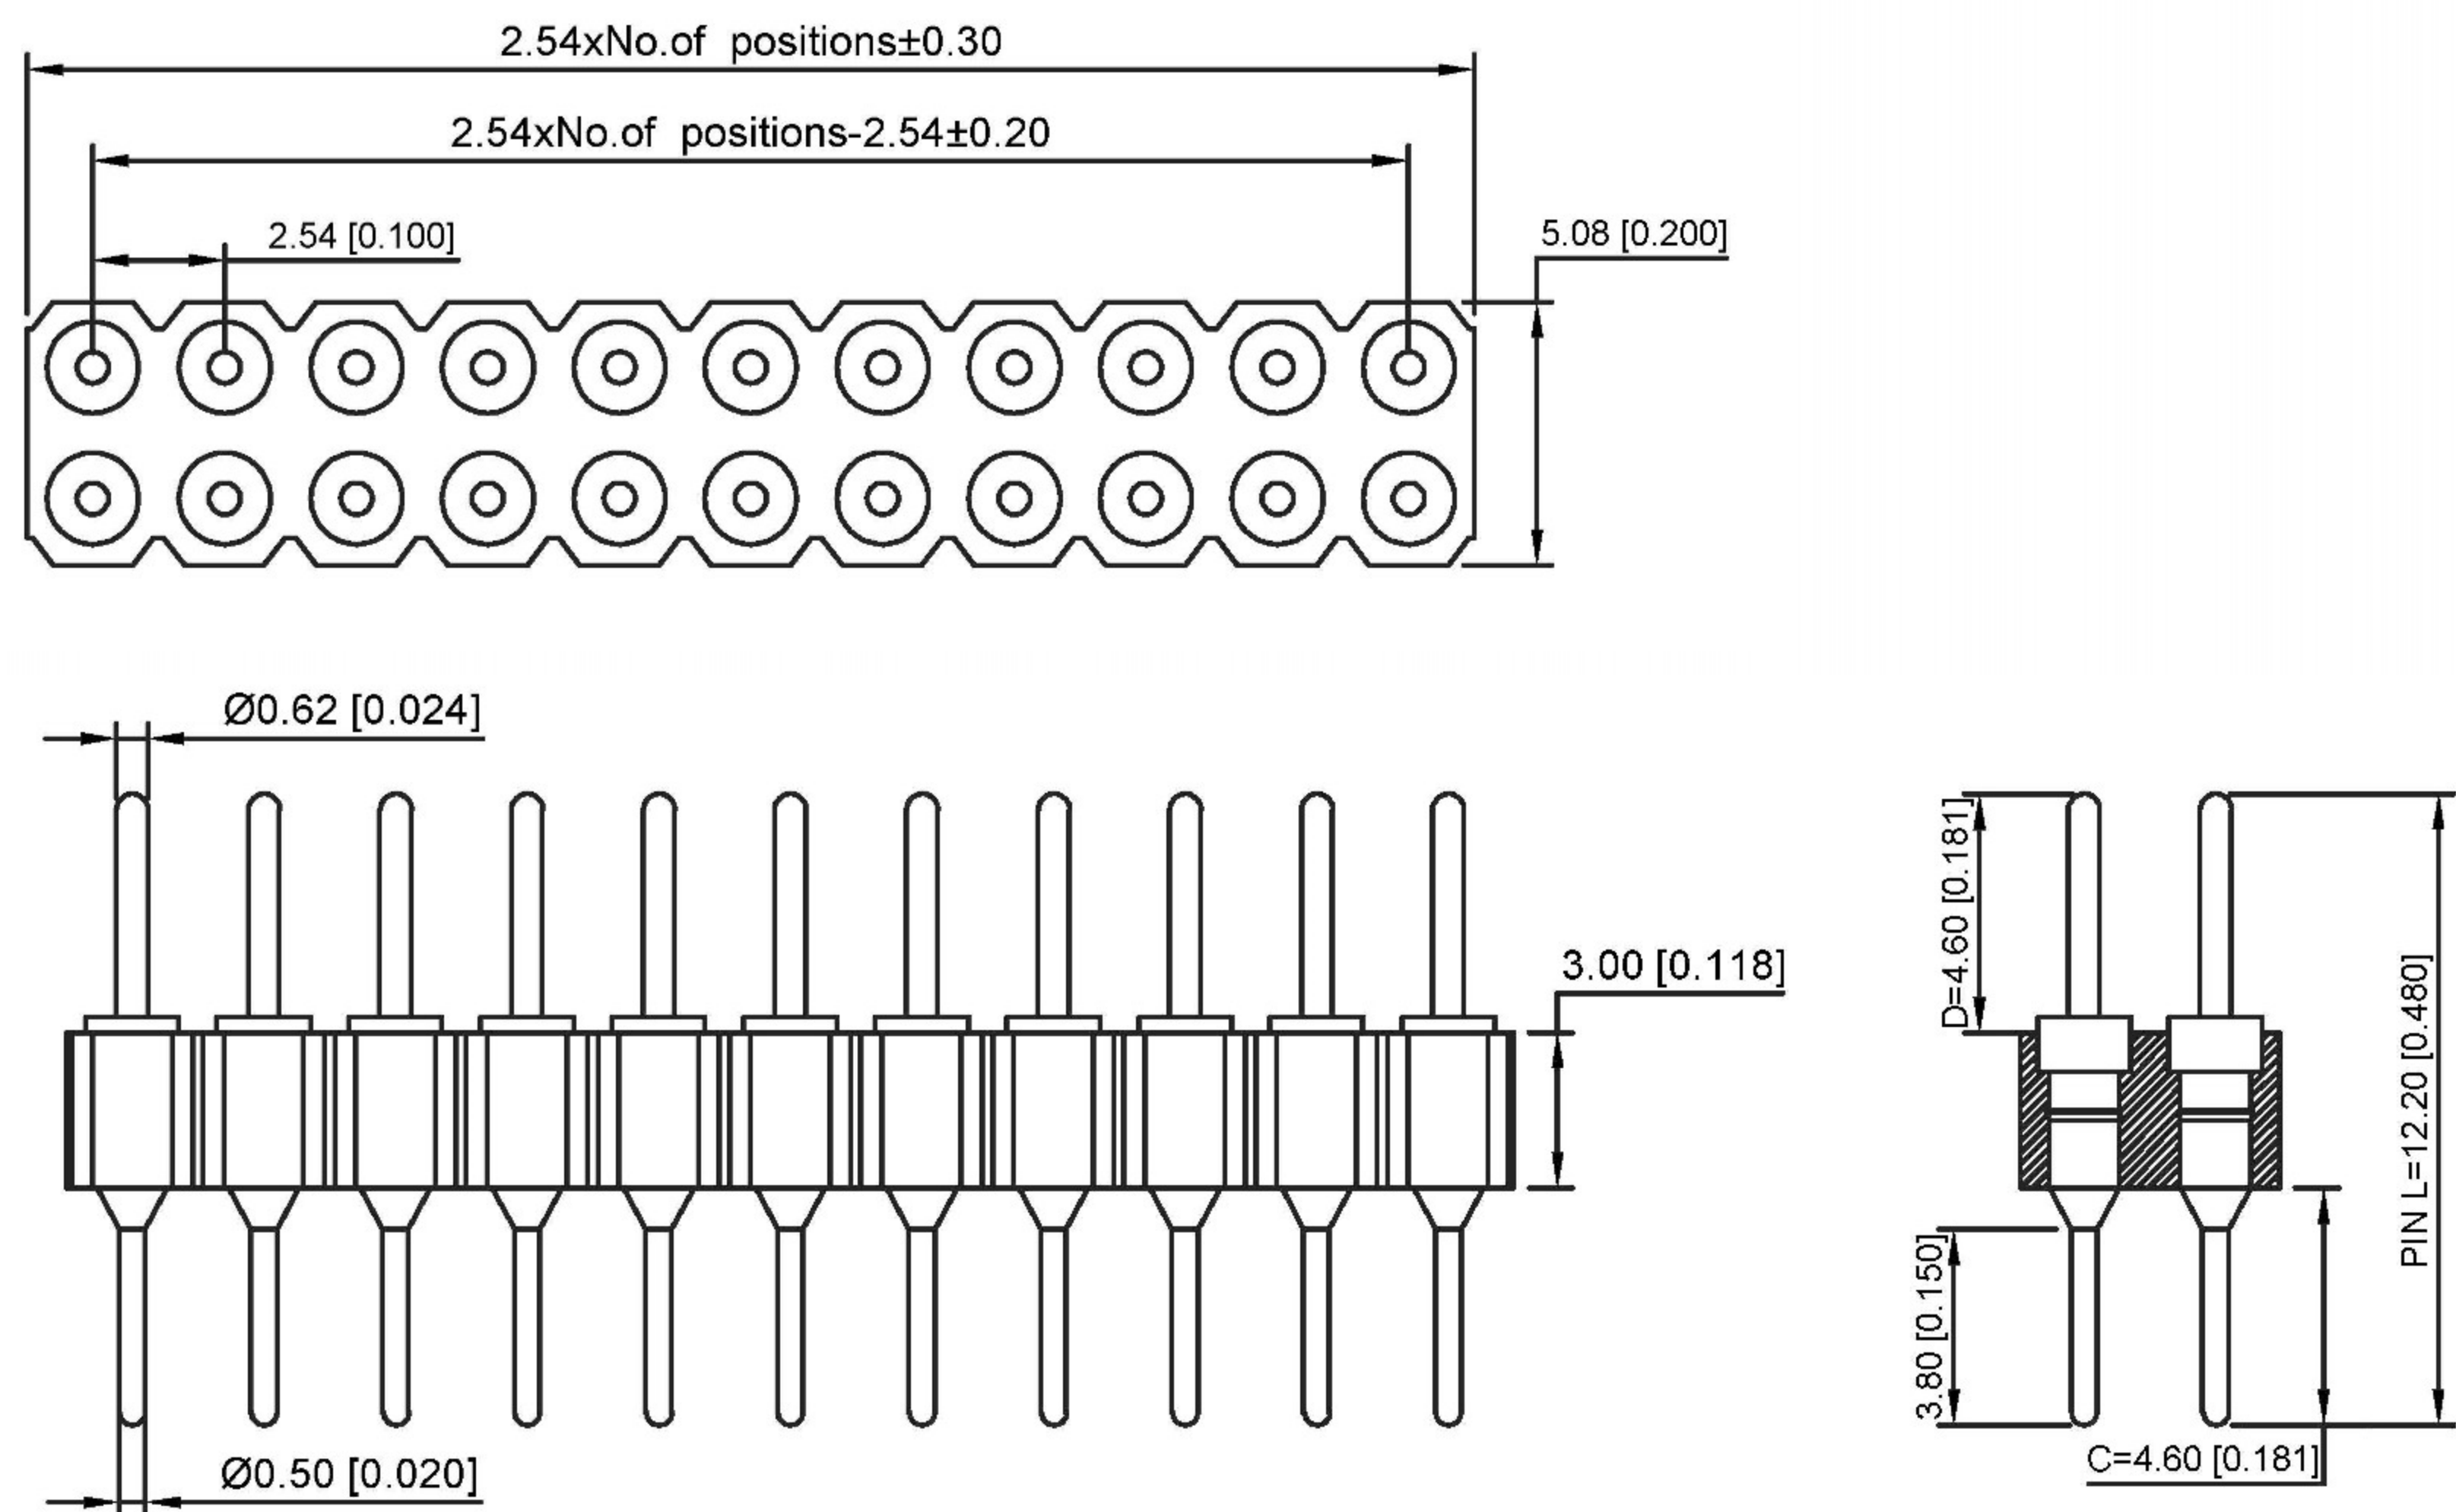


Technical Data
Pin(outer sleeve):Brass,machined CuZn38Pb2
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating pin Ø:0.62/0.50mm
Mechanical life:min 500cycles
Contact resistance:max 10mΩ
Dielectric strength:min 1000V RMS
Operating temperature:-40°C to+105°C
Soldering temperature:+255°C





X5521W V-2*XX -C46 D46-1220
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series.N0.
- ② Category : W-Wafer
- ③ Welding Board Angle : V-Straight 180°
- ④ Row No-Pin No:2*XX-01P-XXP
- ⑤ Pin Length :C=4.6mm
- ⑥ Pin Length :D=4.6mm
- ⑦ 1220:Type1220

X5521WV-2*XX-C46D46-1220	PPS 94V-0	Brass	Tin Gold 1u"	X5521F
PART NO	Material	Material(Terminal)	Finish(Terminal)	Mates With Pin Header

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_1				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED							
REVISIONS						UNSPECIFIED TOLERANCES						WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com									DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0



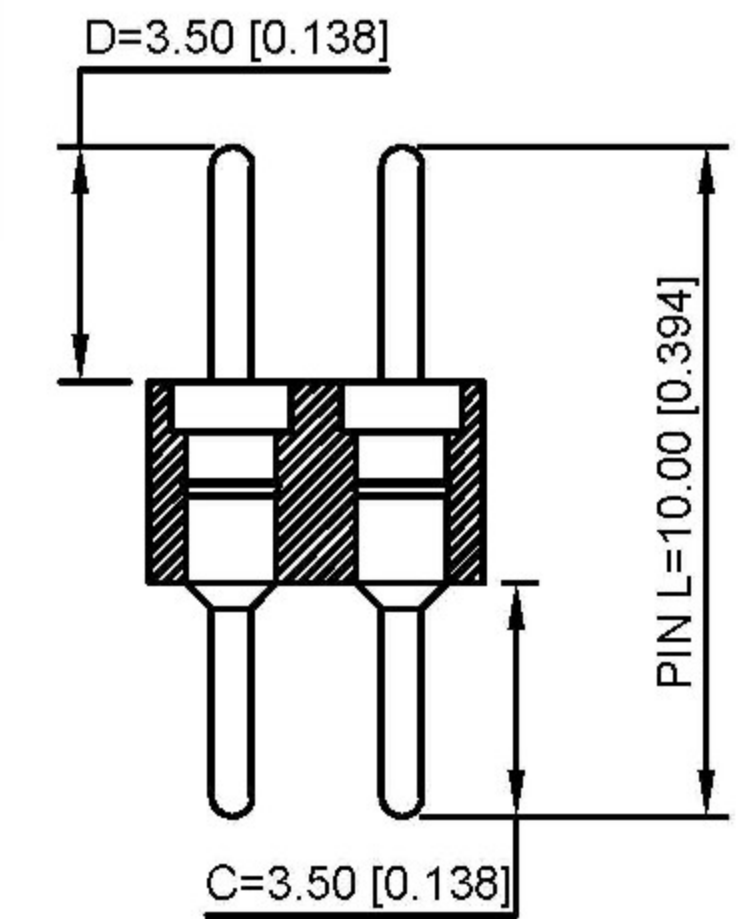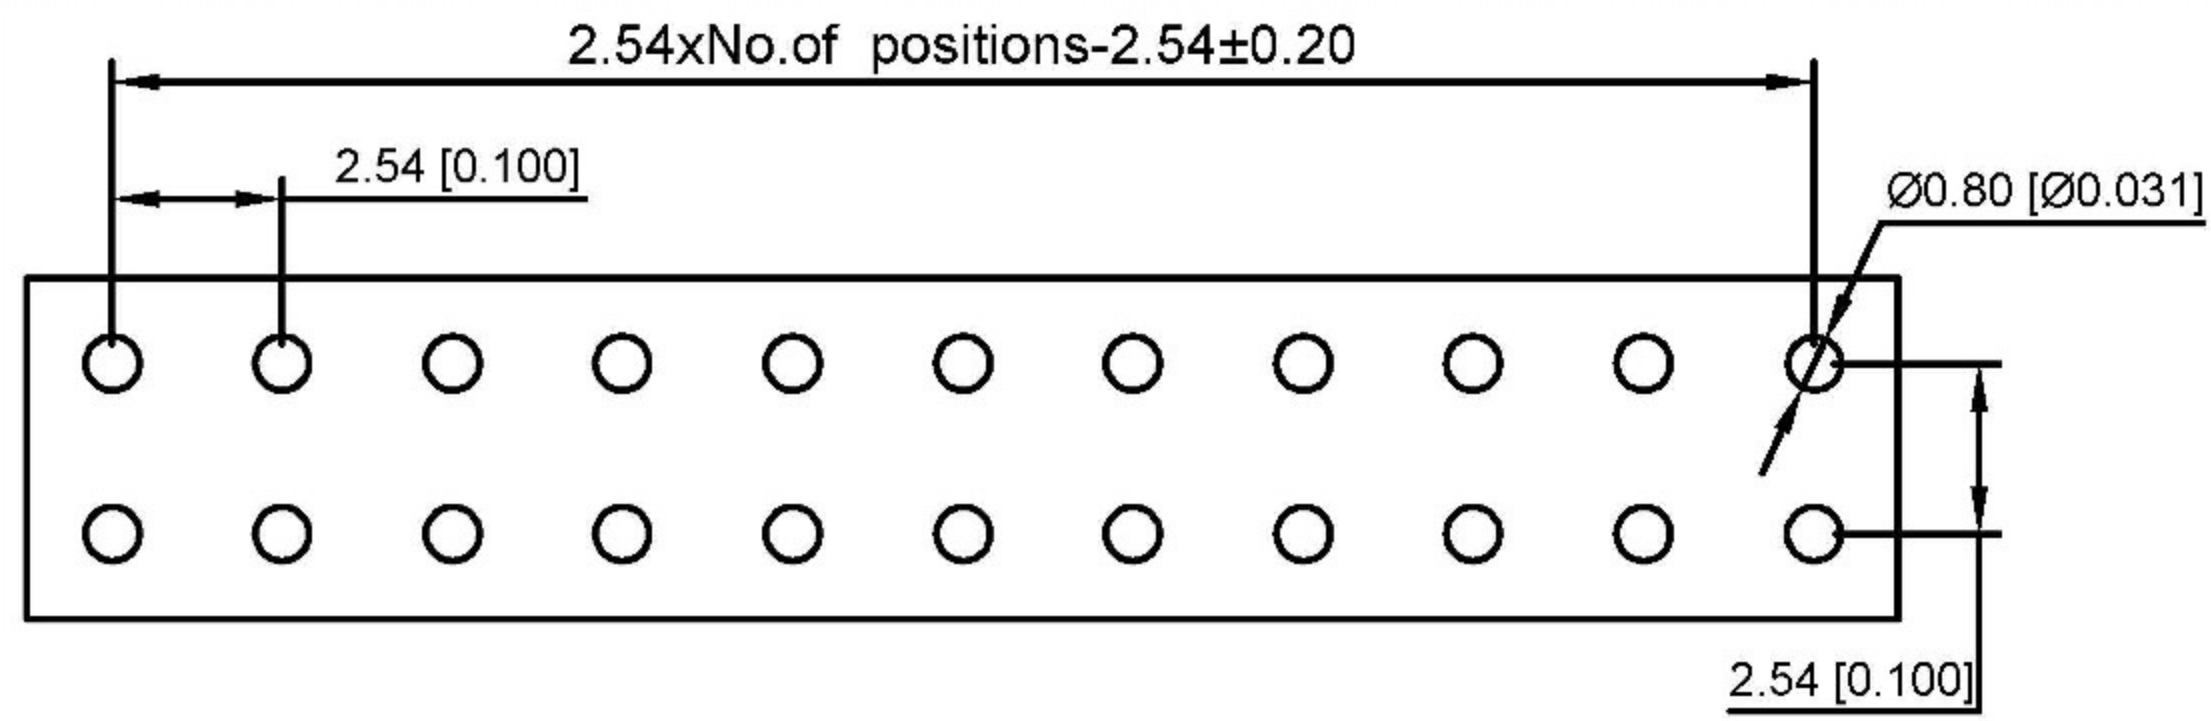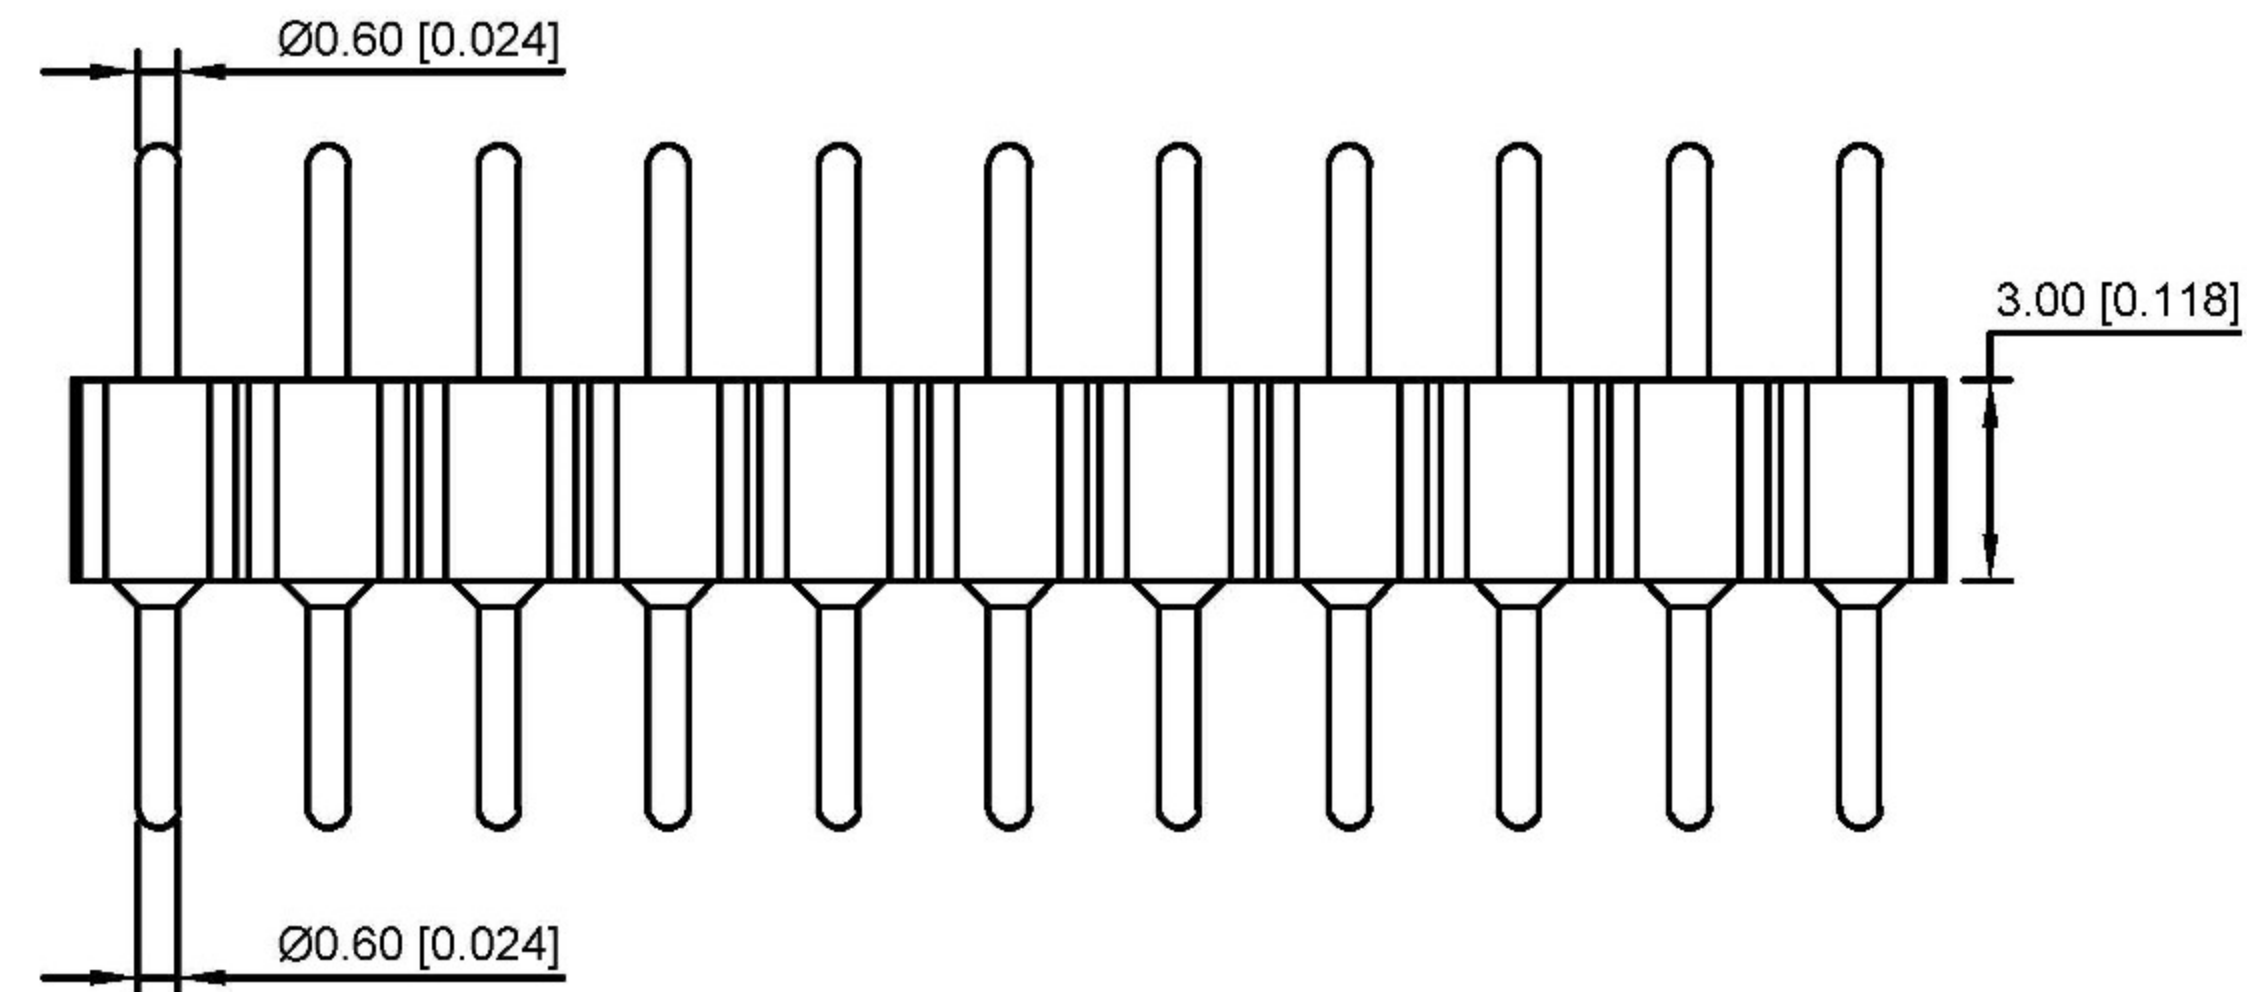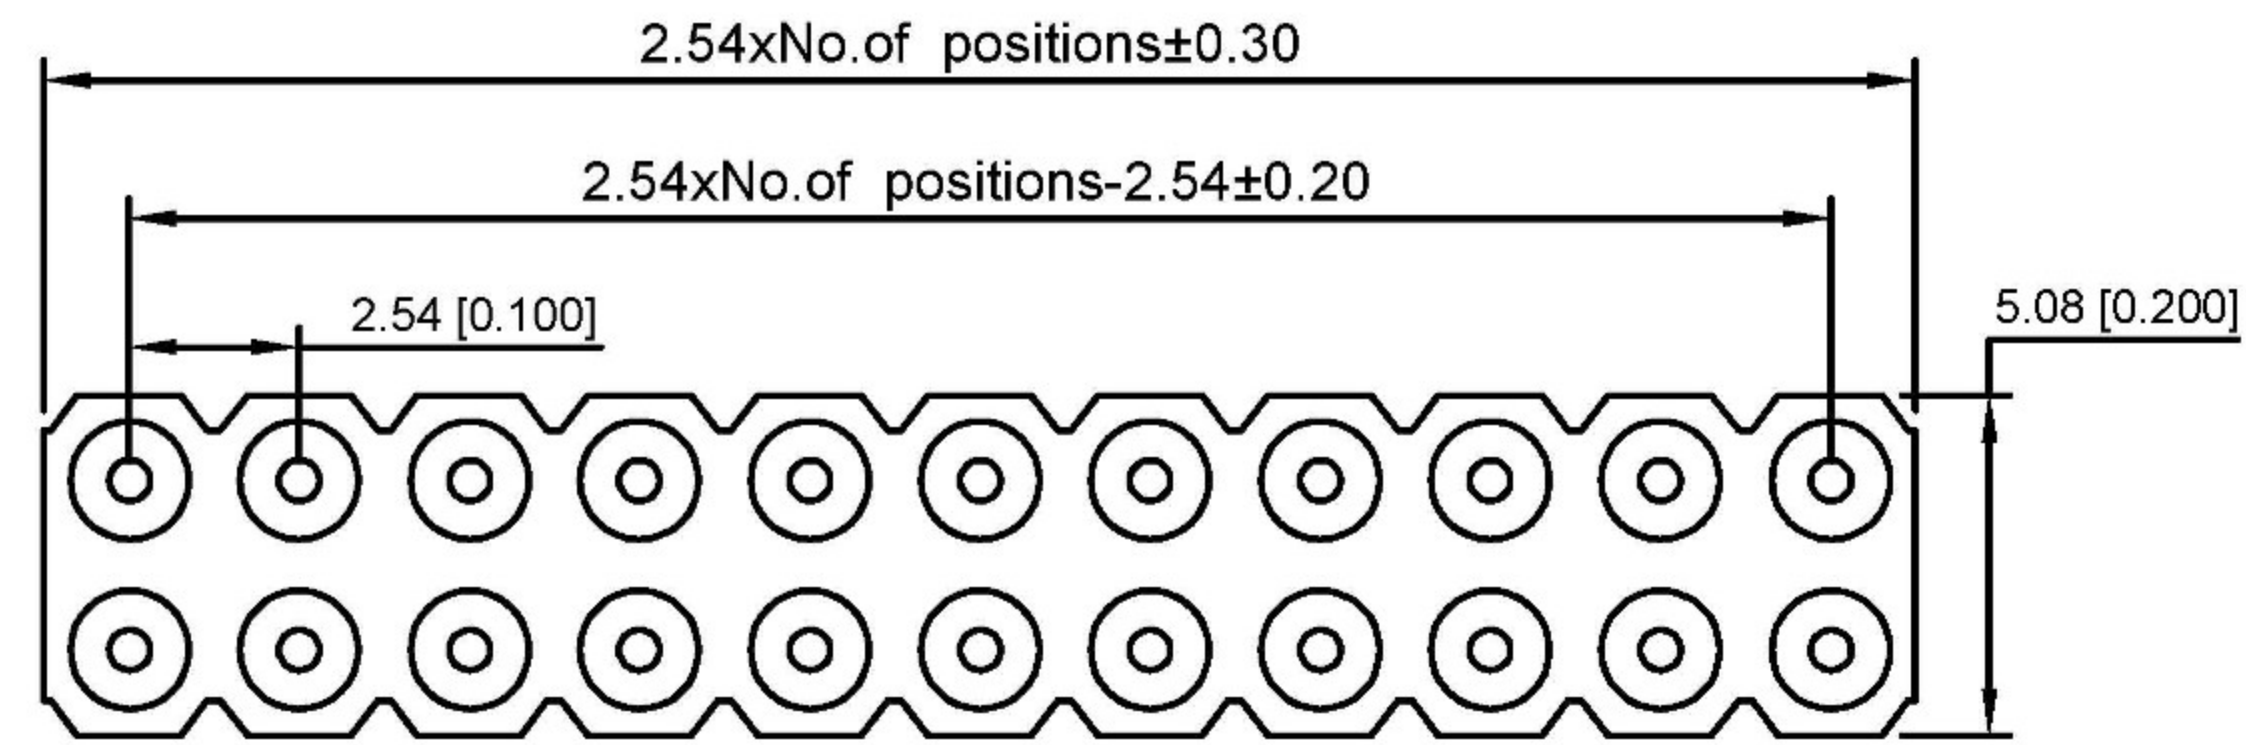





Technical Data
 Pin(outer sleeve):Brass,machined CuZn38Pb2
 Insulator:PPS UL94V-0 colour:black
 Current rating:2Amps
 Mating pin Ø:0.50mm
 Contact resistance:max 10m Ω
 Dielectric strength:min 1000V RMS
 Operating temperature:-40°C to+105°C
 Soldering temperature:+255°C

X5521W V-2*XX -C35 D35-1000
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series.N0.
- ② Category : W-Wafer
- ③ Welding Board Angle : V-Straight 180°
- ④ Row No-Pin No:2*XX-01P-XXP
- ⑤ Pin Length :C=3.5mm
- ⑥ Pin Length :D=3.5mm
- ⑦ 1000:Type1000

X5521WV-2*XX-C35D35-1000	PPS 94V-0	Brass	Tin Gold 1u"	X5521F
PART NO	Material	Material(Terminal)	Finish(Terminal)	Mates With Pin Header

						 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_2			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

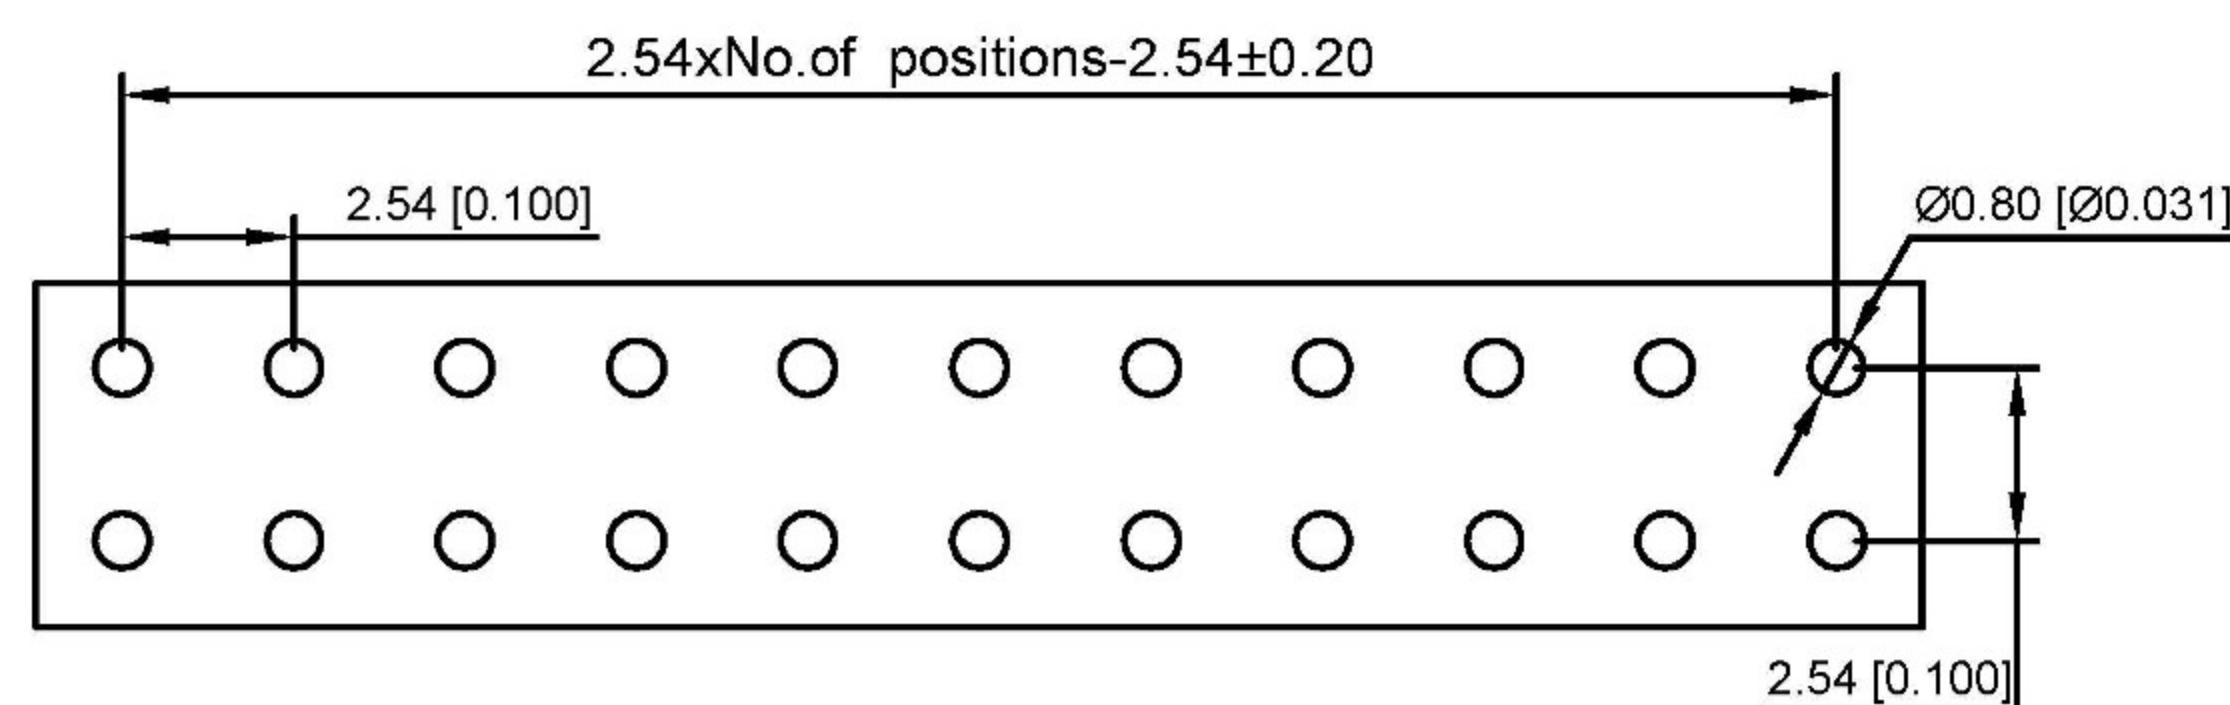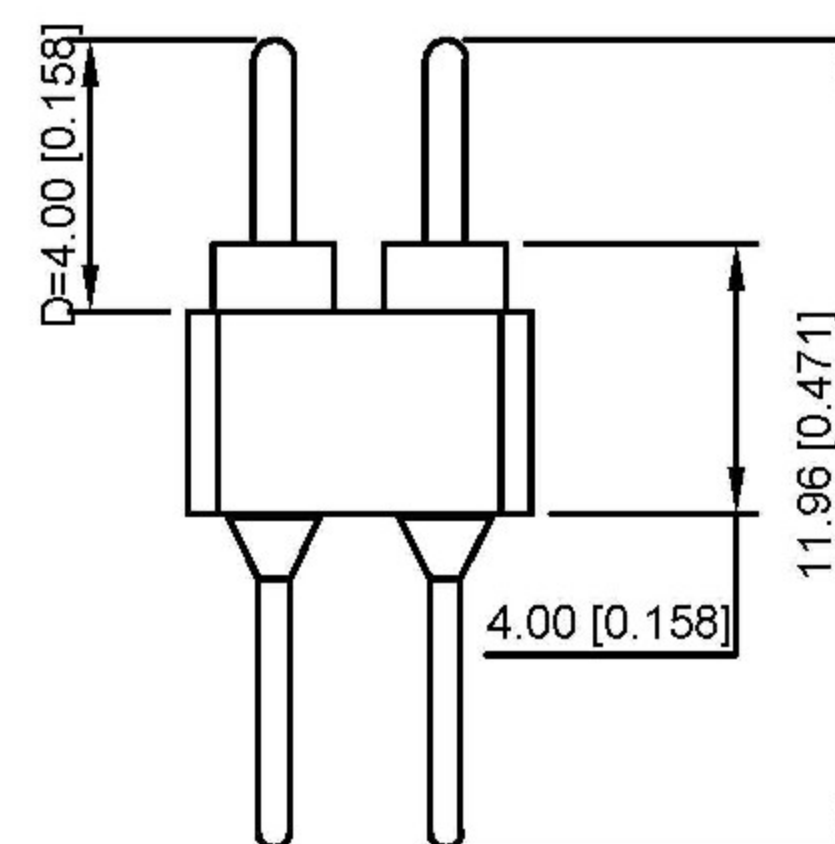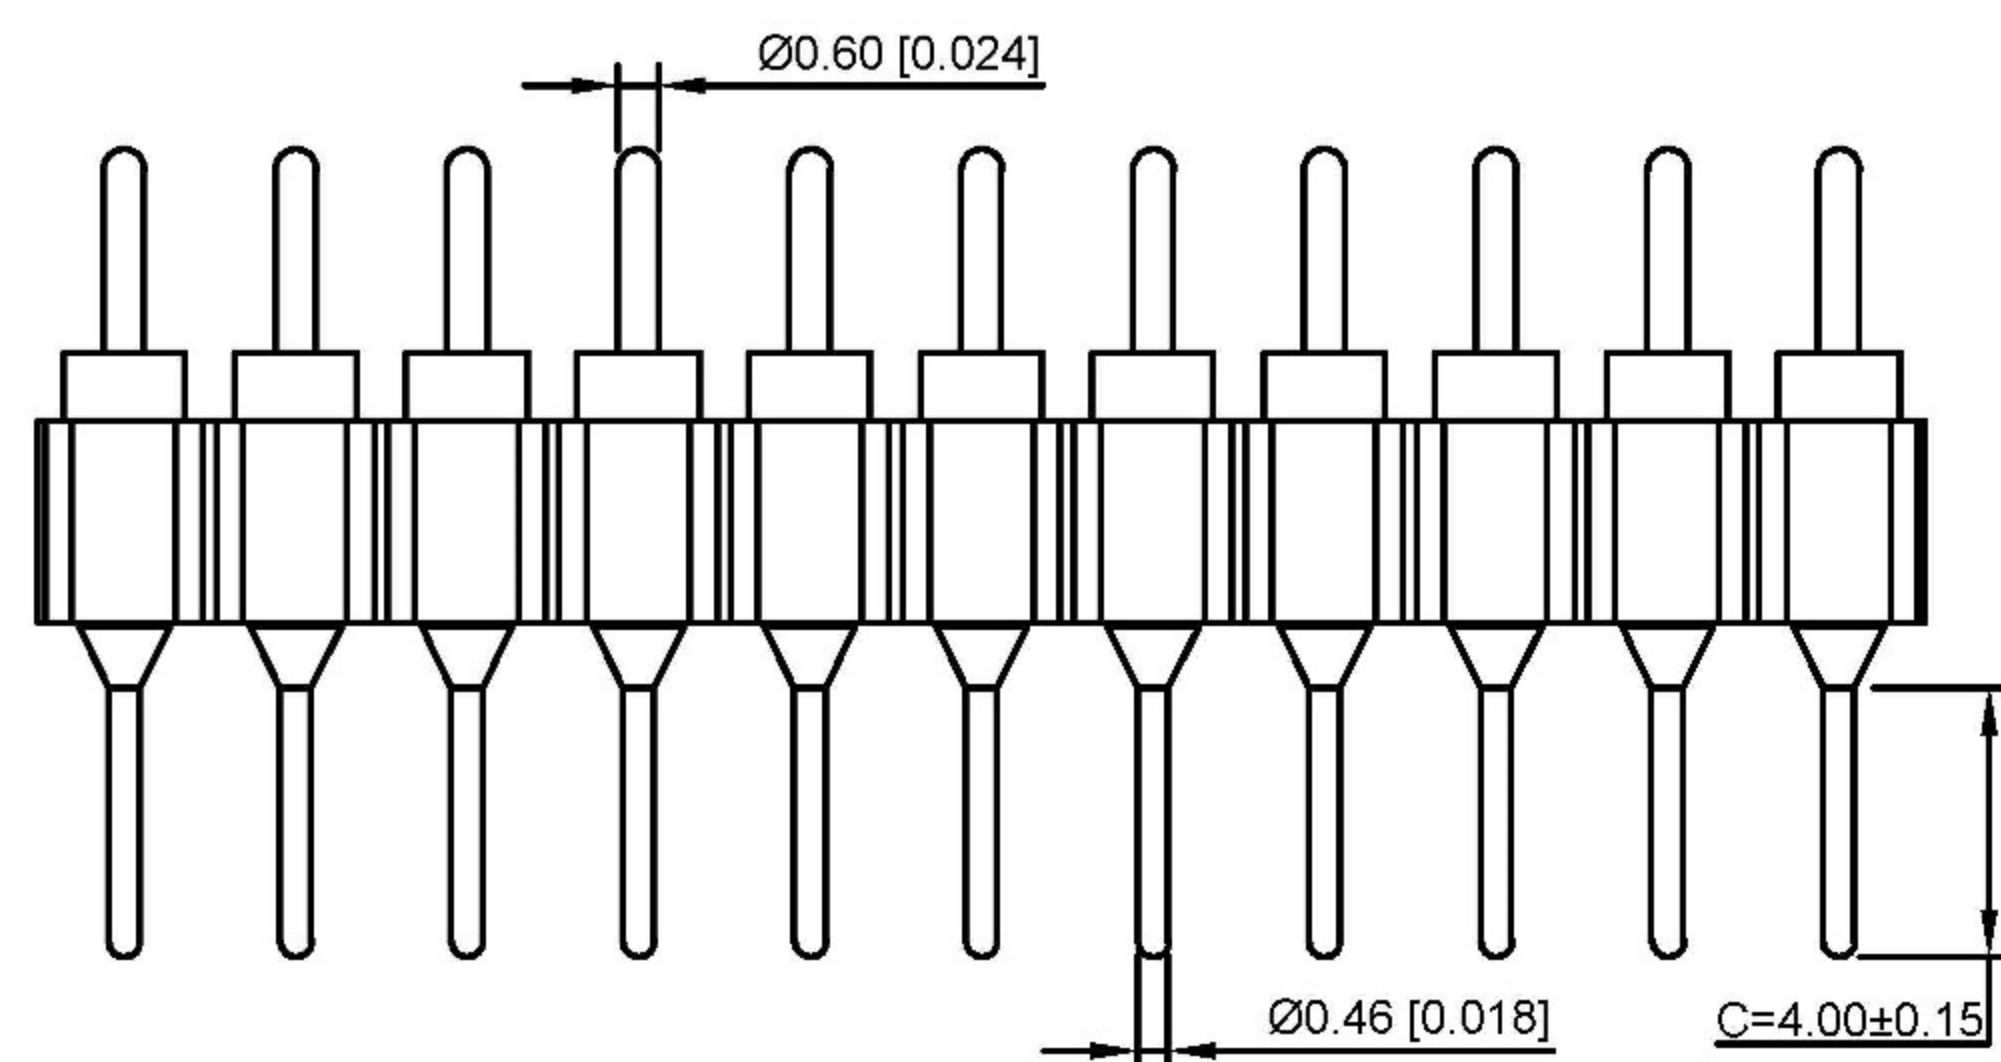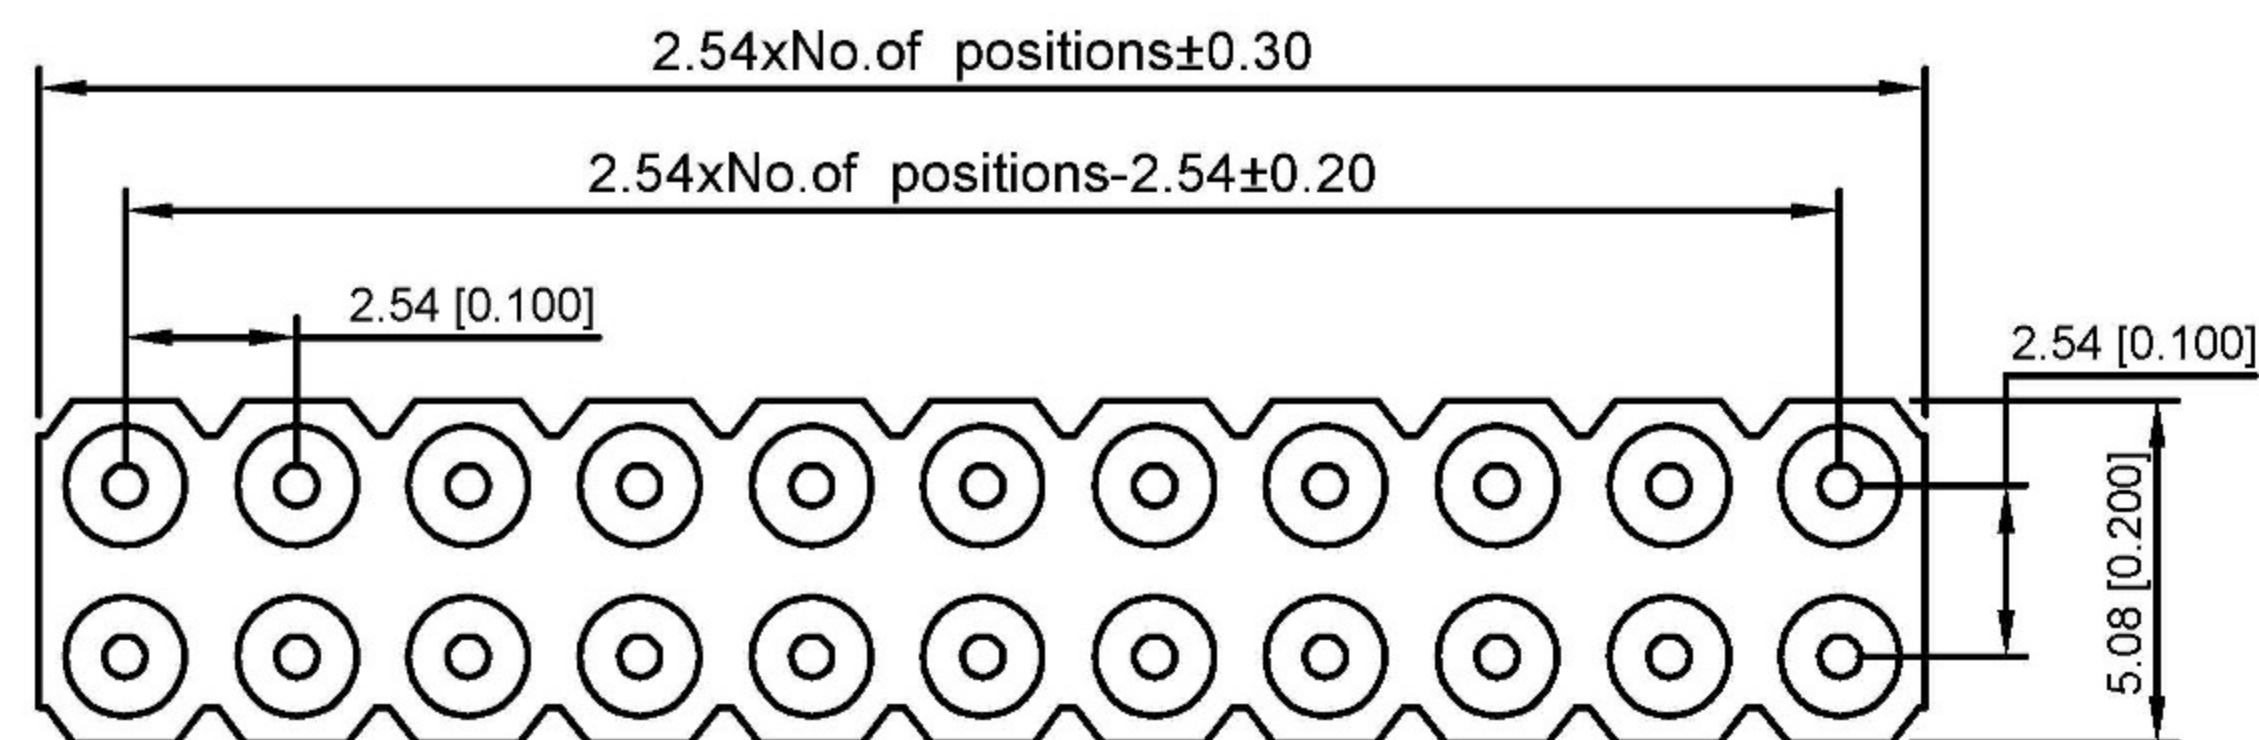

Technical Data
Pin(outer sleeve):Brass,machined CuZn38Pb2
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating pin Ø:0.60/0.46mm
Mechanical life:min 500cycles
Contact resistance:max 10m Ω
Dielectric strength:min 1000V RMS
Operating temperature:-40°C to+105°C
Soldering temperature:+255°C




X5521W V-2*XX -C40 D40-1196

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series.N0.
- ② Category : W-Wafer
- ③ Welding Board Angle : V-Straight 180°
- ④ Row No-Pin No:2*XX-01P-XXP
- ⑤ Pin Length :C=4.0mm
- ⑥ Pin Length :D=4.0mm
- ⑦ 1196:Type1196

X5521WV-2*XX-C40D40-1196	PPS 94V-0	Brass	Tin Gold 1u"	X5521F
PART NO	Material	Material(Terminal)	Finish(Terminal)	Mates With Pin Header

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_3				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED							
REVISIONS						UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0

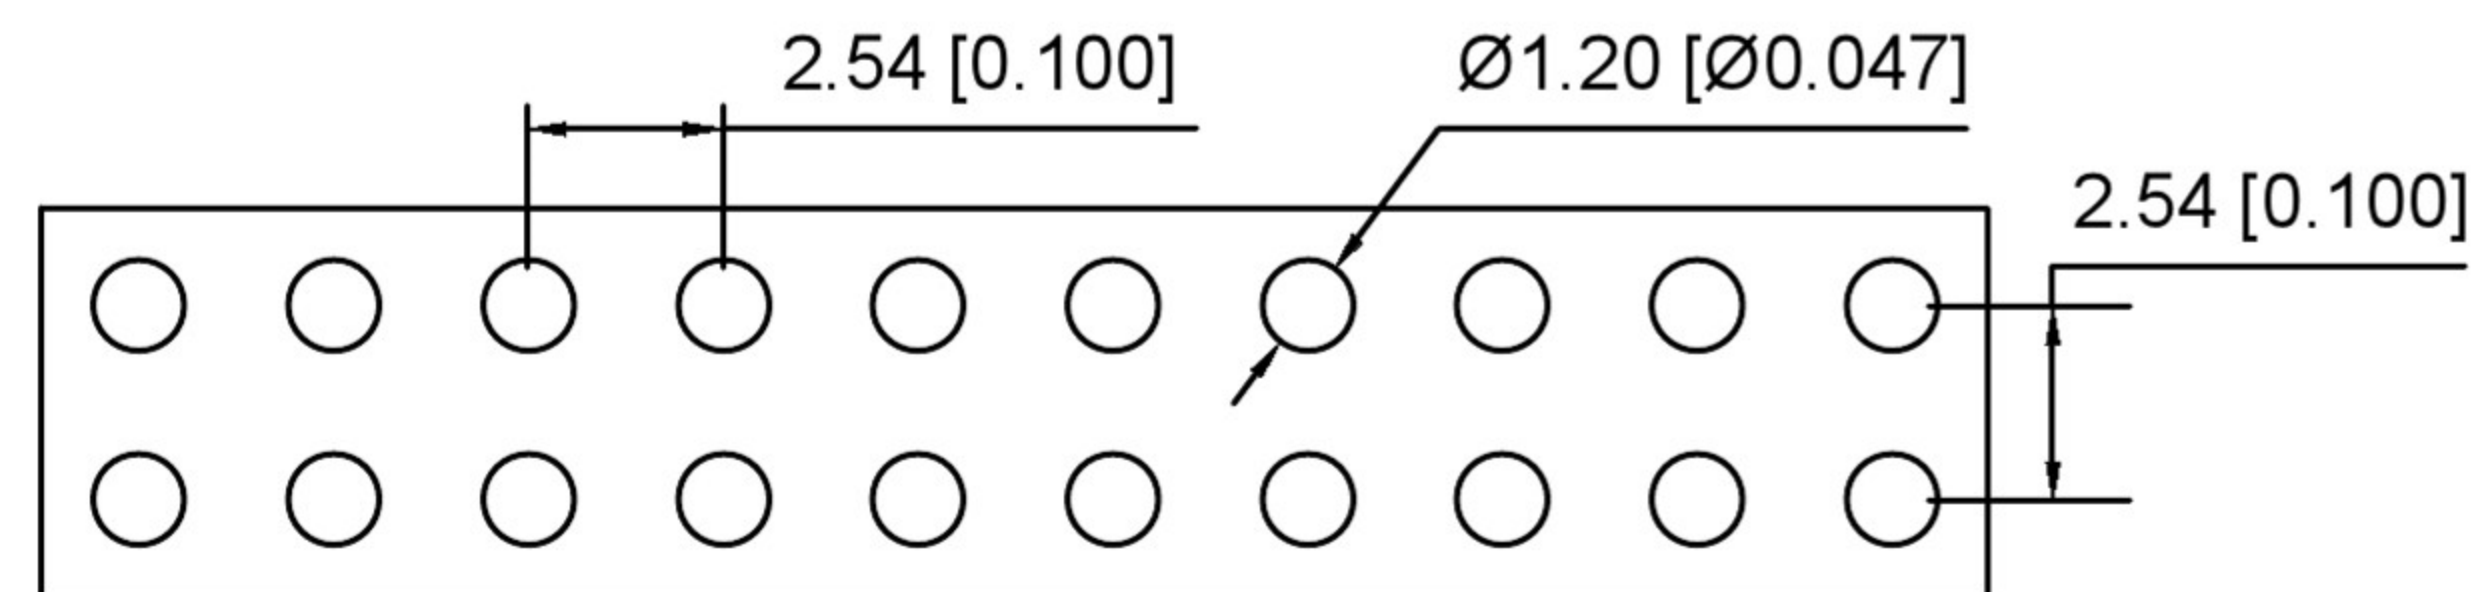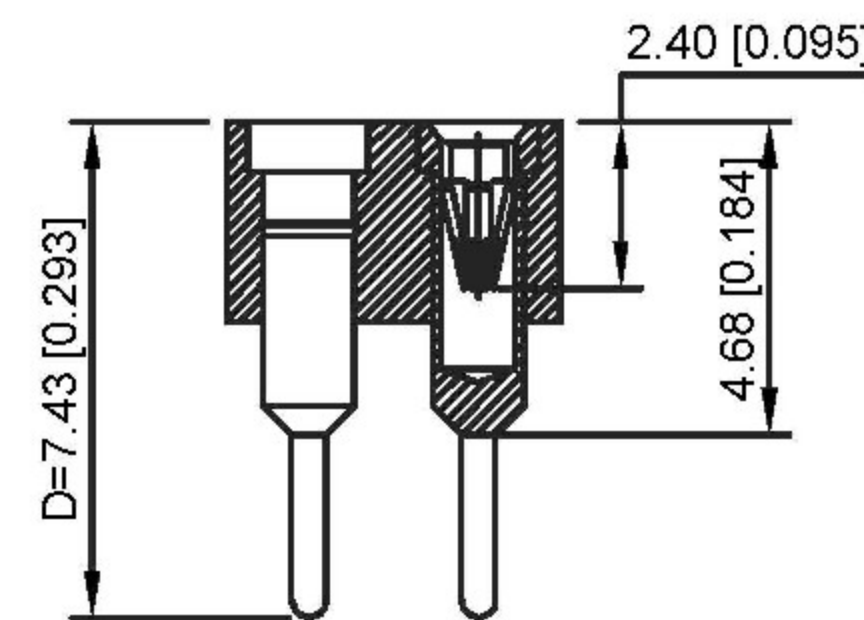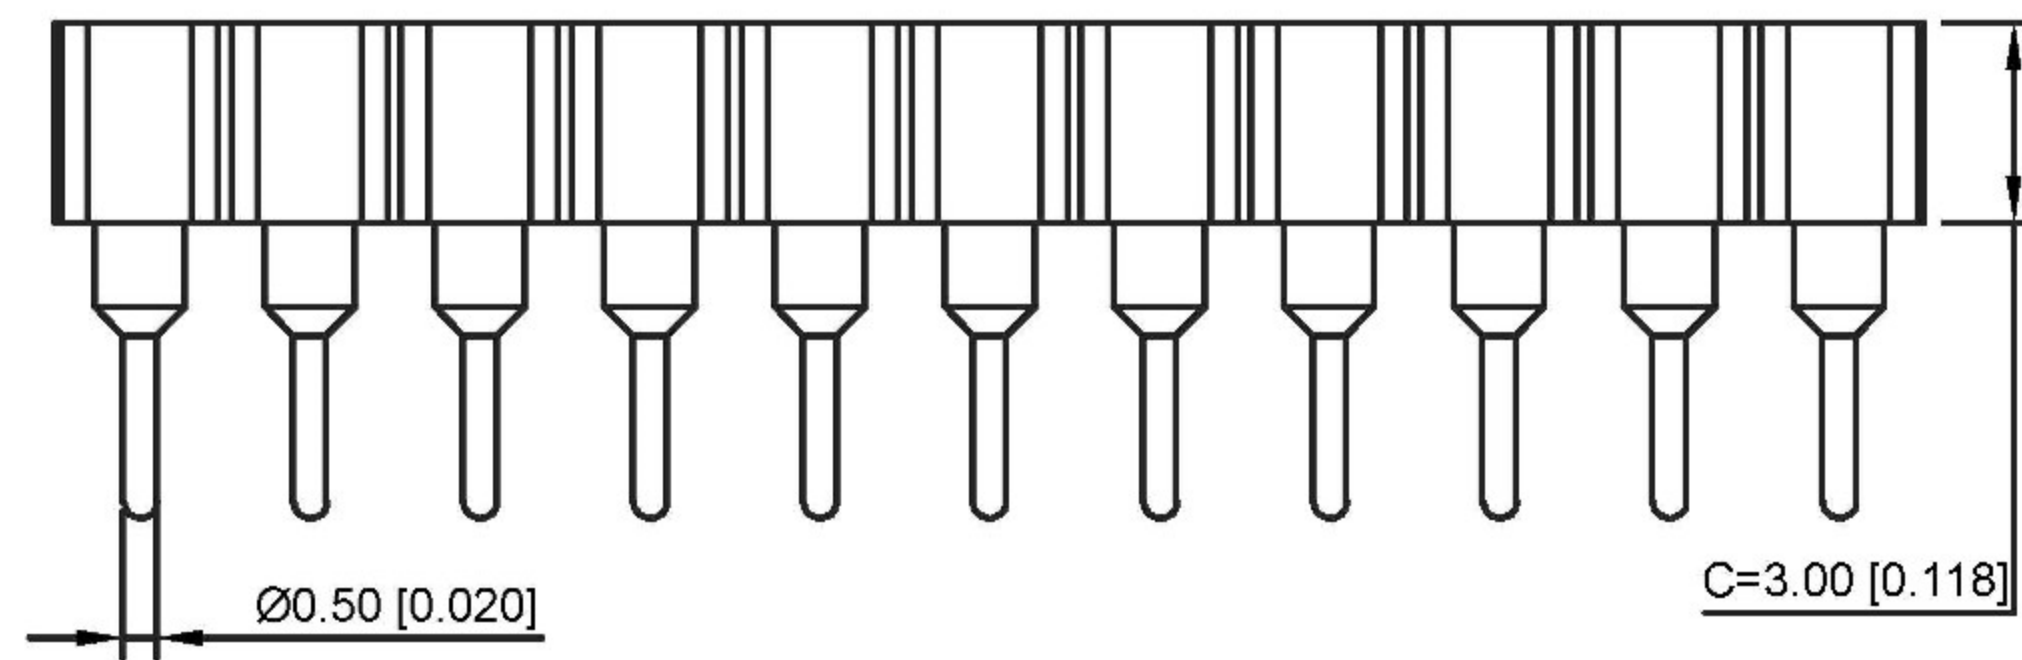

Technical Data
Pin(outer sleeve):Brass,machined CuZn38Pb2
Cllp(Contact 4 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating pin Ø:0.38/0.56mm
Forces:(polished steel gaugeØ0.43mm)
-Insertion:2N typ
-Withdrawal:1N typ
Mechanical life:min 500cycles
Contact resistance:max 10m Ω
Dielectric strength:min 1000V RMS
Operaling temperature:-40°C to +105°C
Soldering temperature:+255°C

X5521 F V-2*XX-C30 D743-0743

- ① Series:N0.

② Category : F-Female

③ Welding Board Angle : V-Straight 180°

④ Row No-Pin No:2*XX-01P-XXP




⑤ Plastic Height :C=2.8mm

⑥ Pin Length :D=7.43mm


⑦ 0743:TYPE 0743

X5521FV-2*XX-C30D743-0743	PPS 94V-0	Brass	Tin Gold 1u"	X5521F	
PART NO	Material	Material(Terminal)	Finish(Terminal)	Mates With	Pin Header

						DSND		SCALE: N/A		MODEL TYPE: BTB CONNECTOR		
				ANGLAR	±5°	 Switch Connector	DWN		VIEW: 	PART NO.: X5521_4		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16	±0.3		APPD		SIZE: A4			
				16 < L ≤ 63	±0.4							
				L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES				WEIGHT		
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD				SHEET		
										1/1		
										REVISION		
										A0		

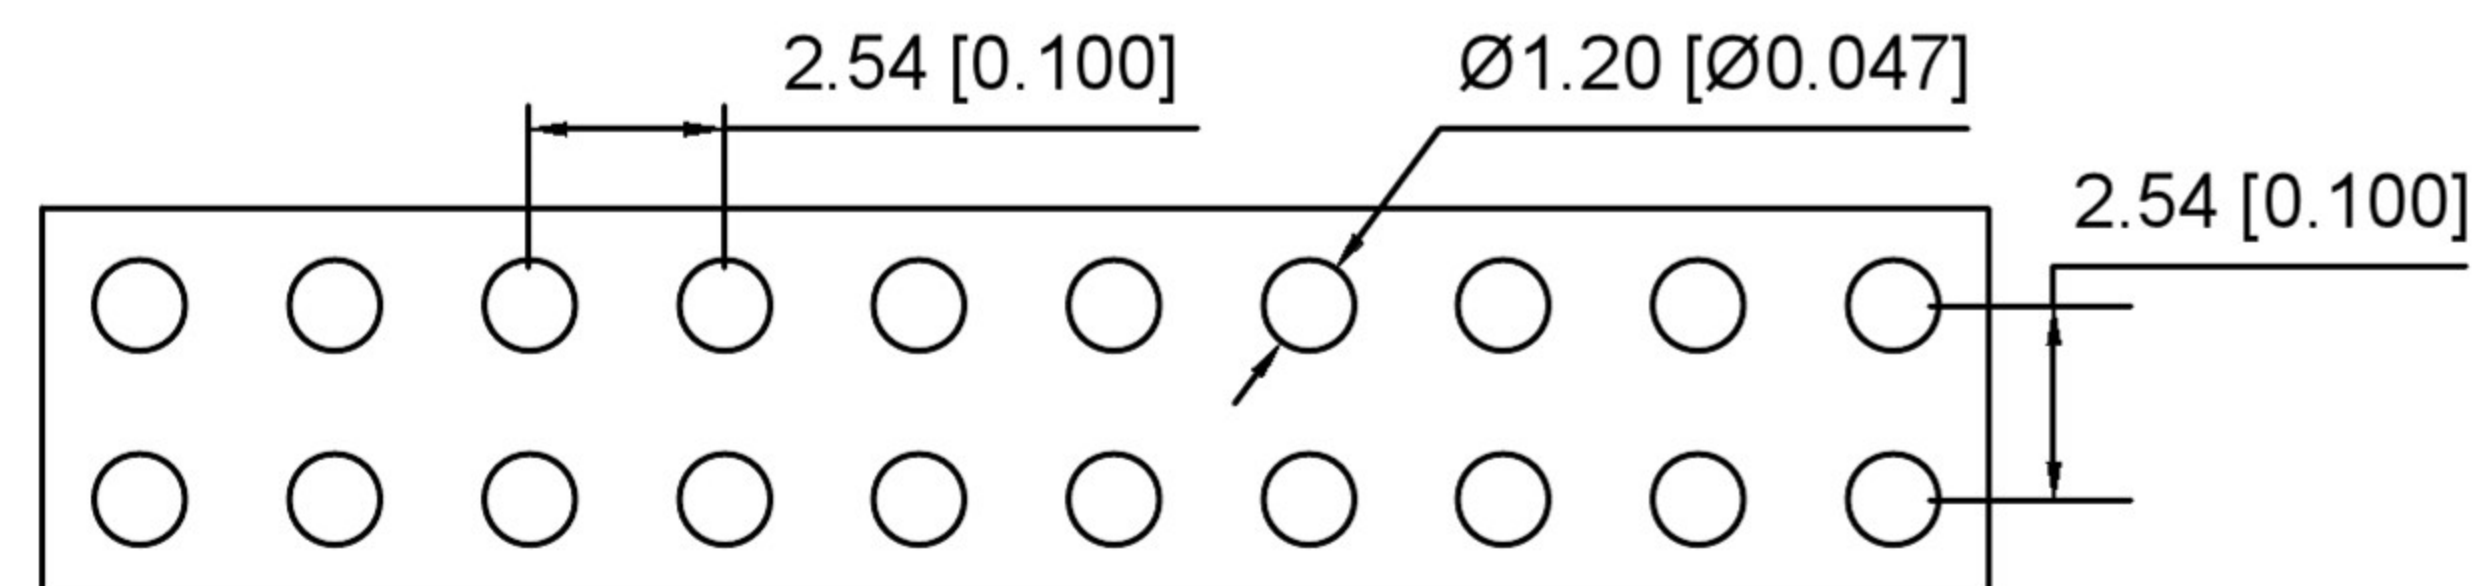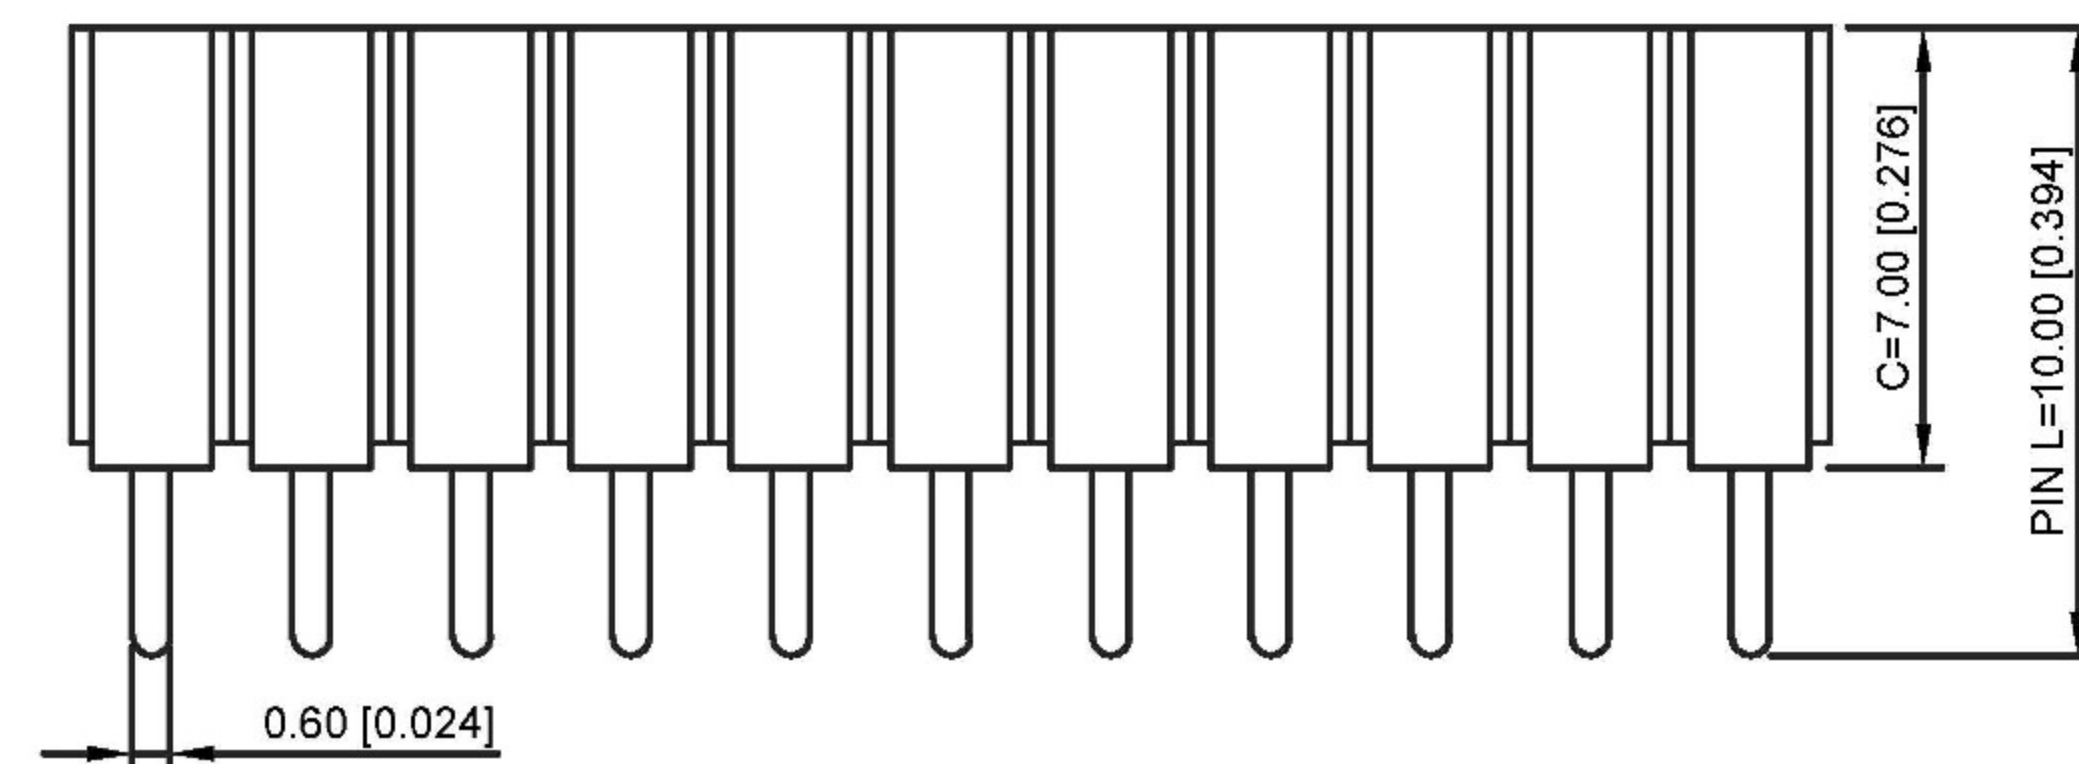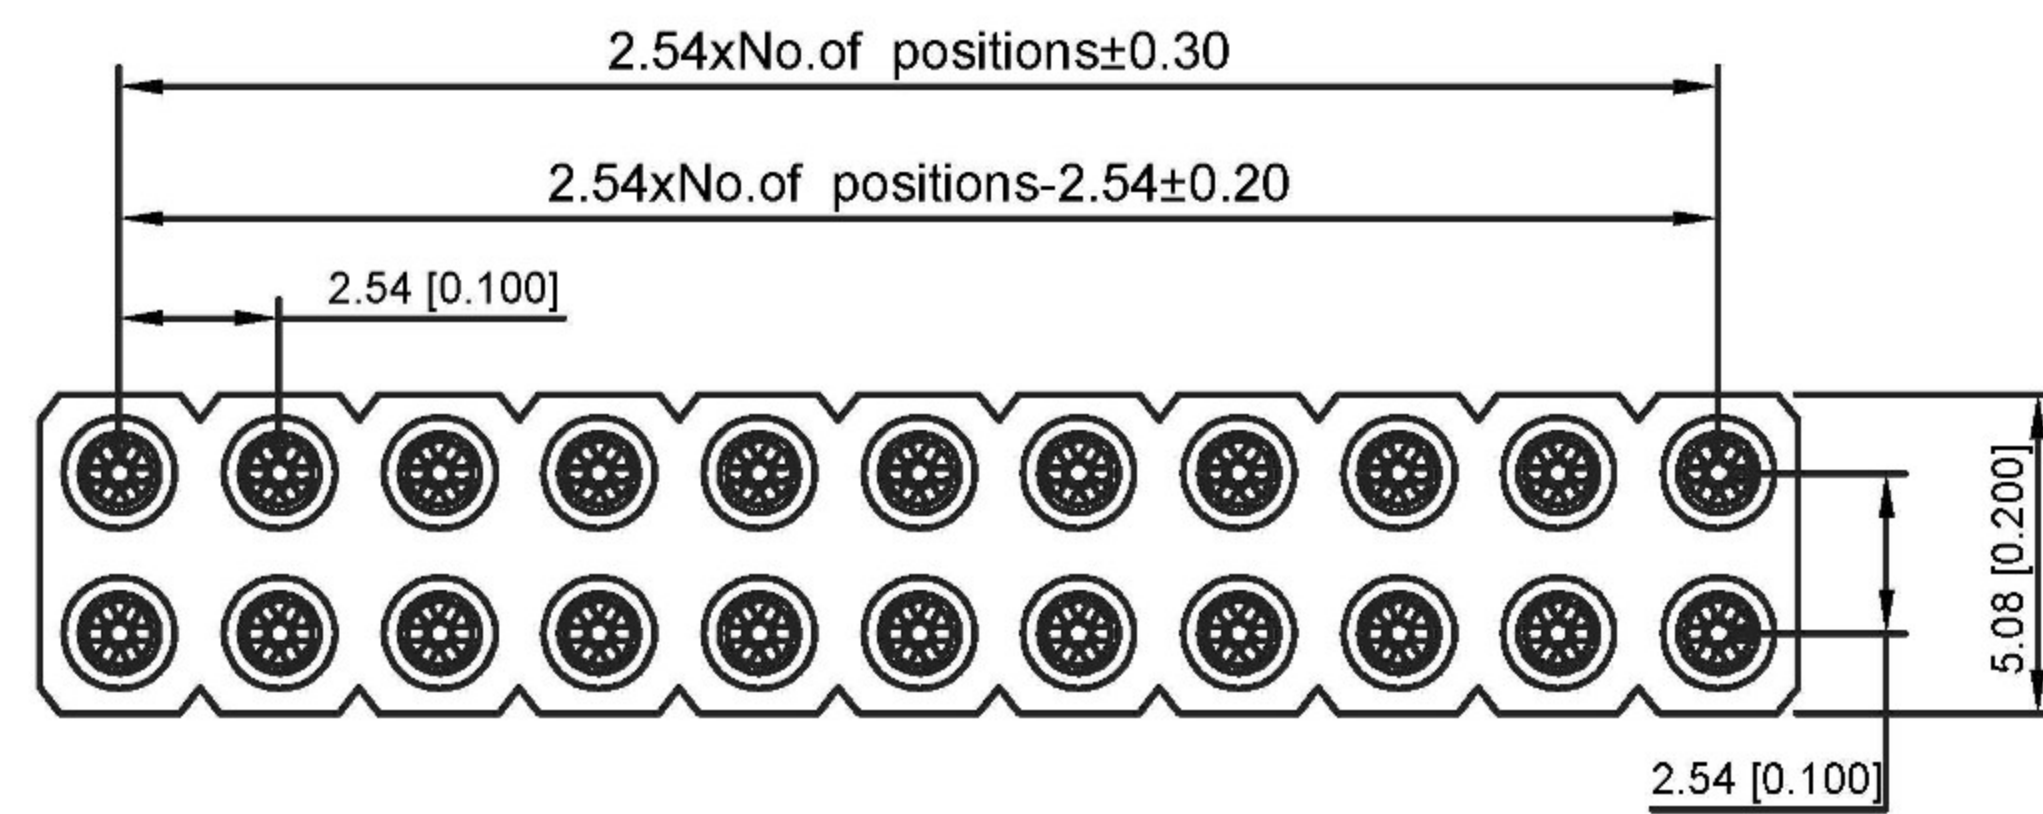

Recommended P.C.B
Layout(±0.05)

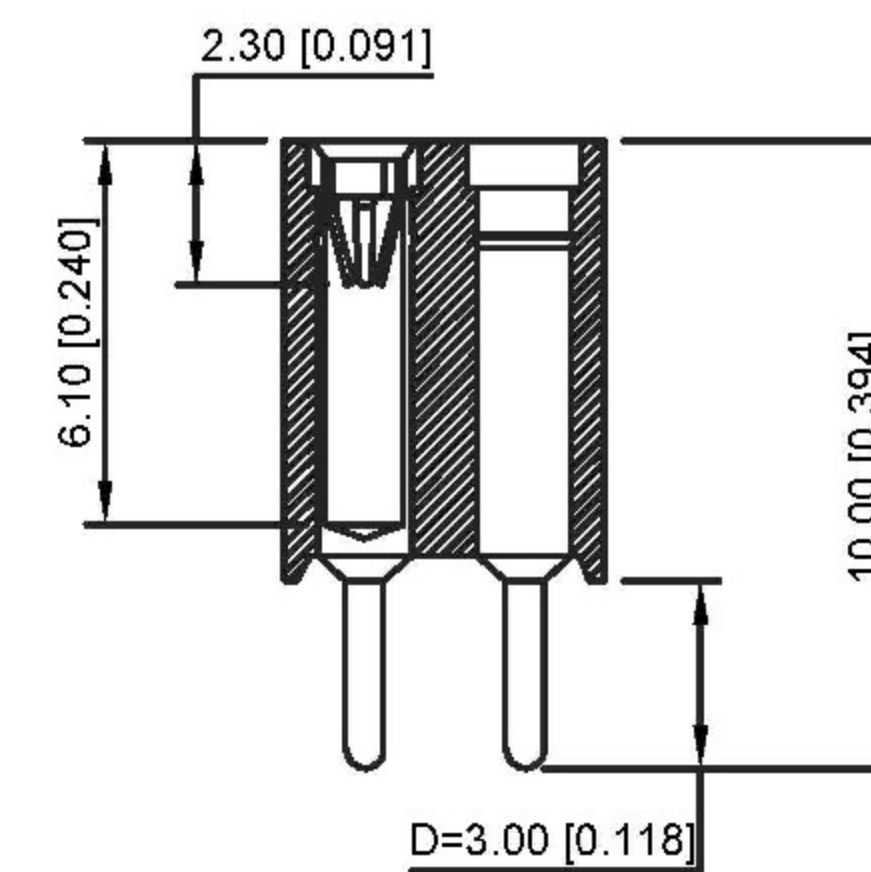

Technical Data
Pin(outer sleeve):Brass,machined CuZn38Pb2
Cllp(Contact 6 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating pin Ø:0.635/0.889mm
Forces:(polished steel gaugeØ0.66mm)
-Insertion:1.2N typ
-Withdrawal:0.6N typ
Mechanical life:min 500cycles
Contact resistance:max 10m Ω
Dielectric strength:min 1000V RMS
Operaling temperature:-40°C to+105°C
Soldering temperature:+255°C



X5521 F V-2*XX-C70 D30-1000

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series.N0.
- ② Category : F-Female
- ③ Welding Board Angle : V-Straight 180°
- ④ Row No-Pin No:2*XX-01P-XXP
- ⑤ Plastic Height :C=7.0mm
- ⑥ Pin Length :D=3.0mm
- ⑦ 1000:TYPE 1000

X5521FV-2*XX-C70D30-1000	PPS 94V-0	Brass	Tin Gold 1u"	X5521F
PART NO	Material	Material(Terminal)	Finish(Terminal)	Mates With Pin Header

						 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_5				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED	REVISIONS			UNSPECIFIED TOLERANCES			
						www.alpsr.com			www.gdxjdz.com			www.xbswitch.com		
						DONG GUAN XI BANG ELECTRONIC CO., LTD						WEIGHT	SHEET	REVISION
													1/1	A0

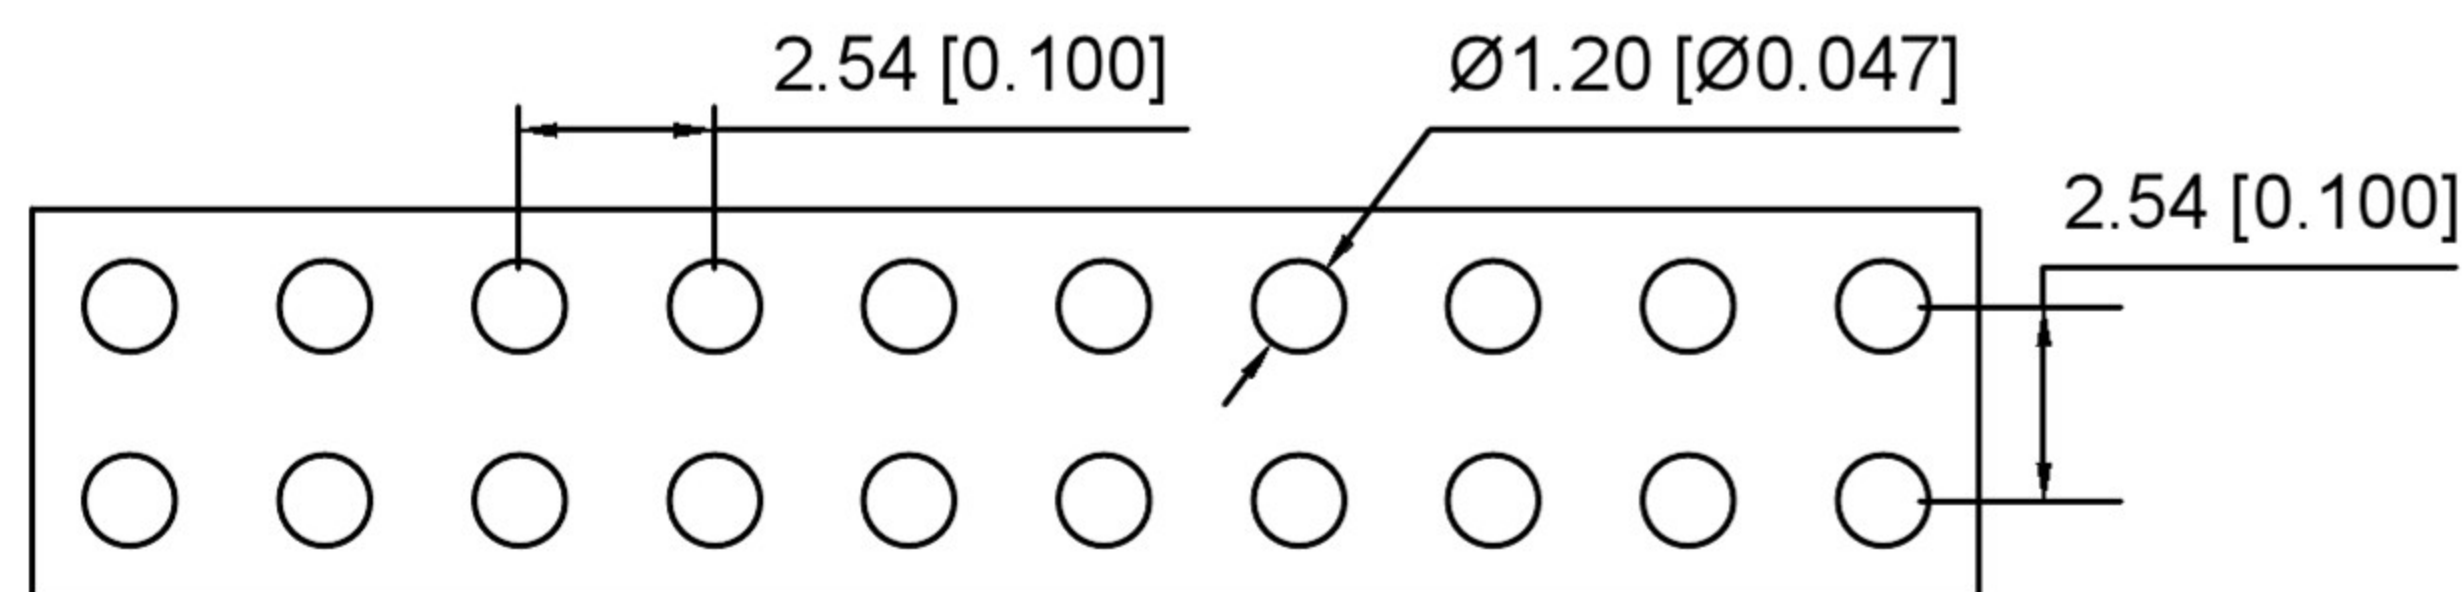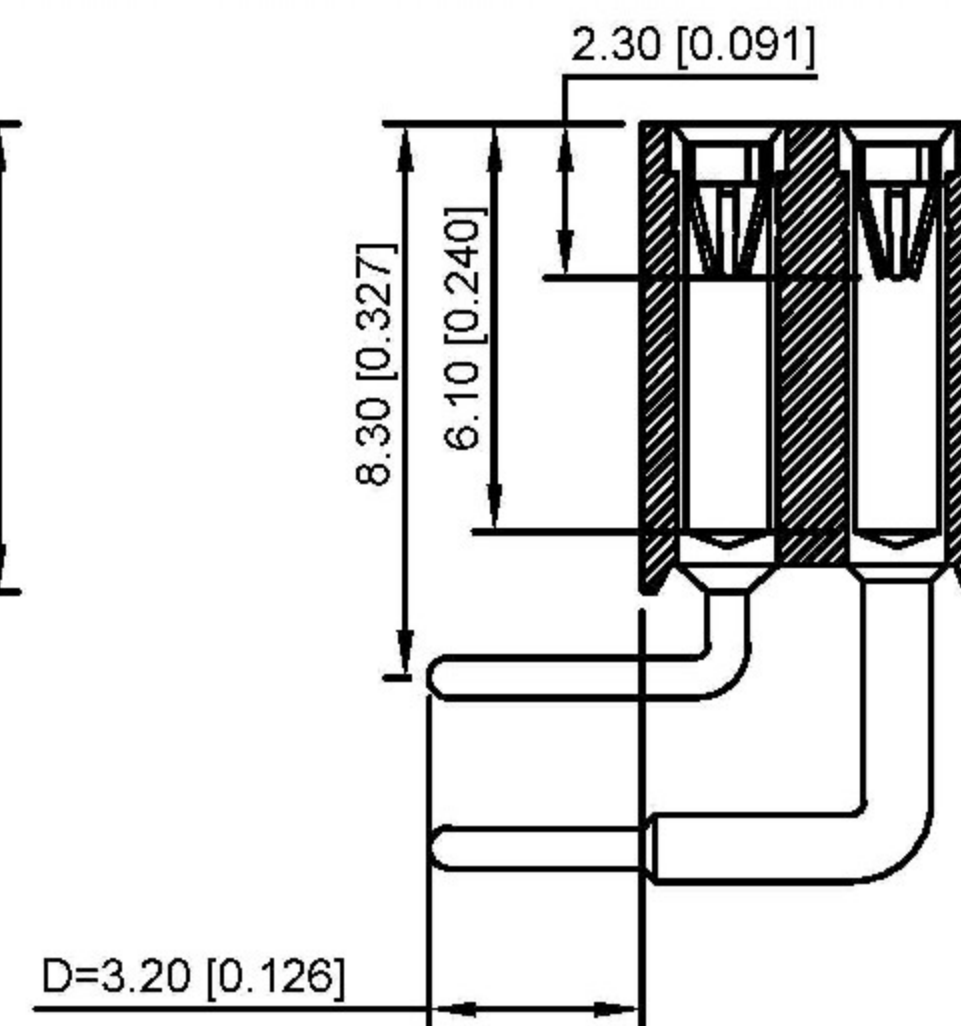

Recommended P.C.B
Layout(± 0.05)

Technical Data
Pin(outer sleeve):Brass,machined CuZn38Pb2
Cllp(Contact 6 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating pin Ø:0.635/0.889mm
Forces:(polished steel gaugeØ0.66mm)
-Insertion:1.2N typ
-Withdrawal:0.6N typ
Mechanical life:min 500cycles
Contact resistance:max 10m Ω
Dielectric strength:min 1000V RMS
Operaling temperature:-40°C to+105°C
Soldering temperature:+255°C





X5521F R -2*XX-C70 D32-1743

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series.N0.
- ② Category : F-Female
- ③ Welding Board Angle : R-Straight 90°
- ④ Row No-Pin No:2*XX-01P-XXP
- ⑤ Pin Length :C=7.0mm
- ⑥ Pin Length :D=3.2mm
- ⑦ 1743:Type1743

X5521FR-2*XX-C70D32-1743	PPS 94V-0	Brass	Tin Gold 1u"	X5521W
PART NO	Material	Material(Terminal)	Finish(Terminal)	Mates With Pin Header

						 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_6			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

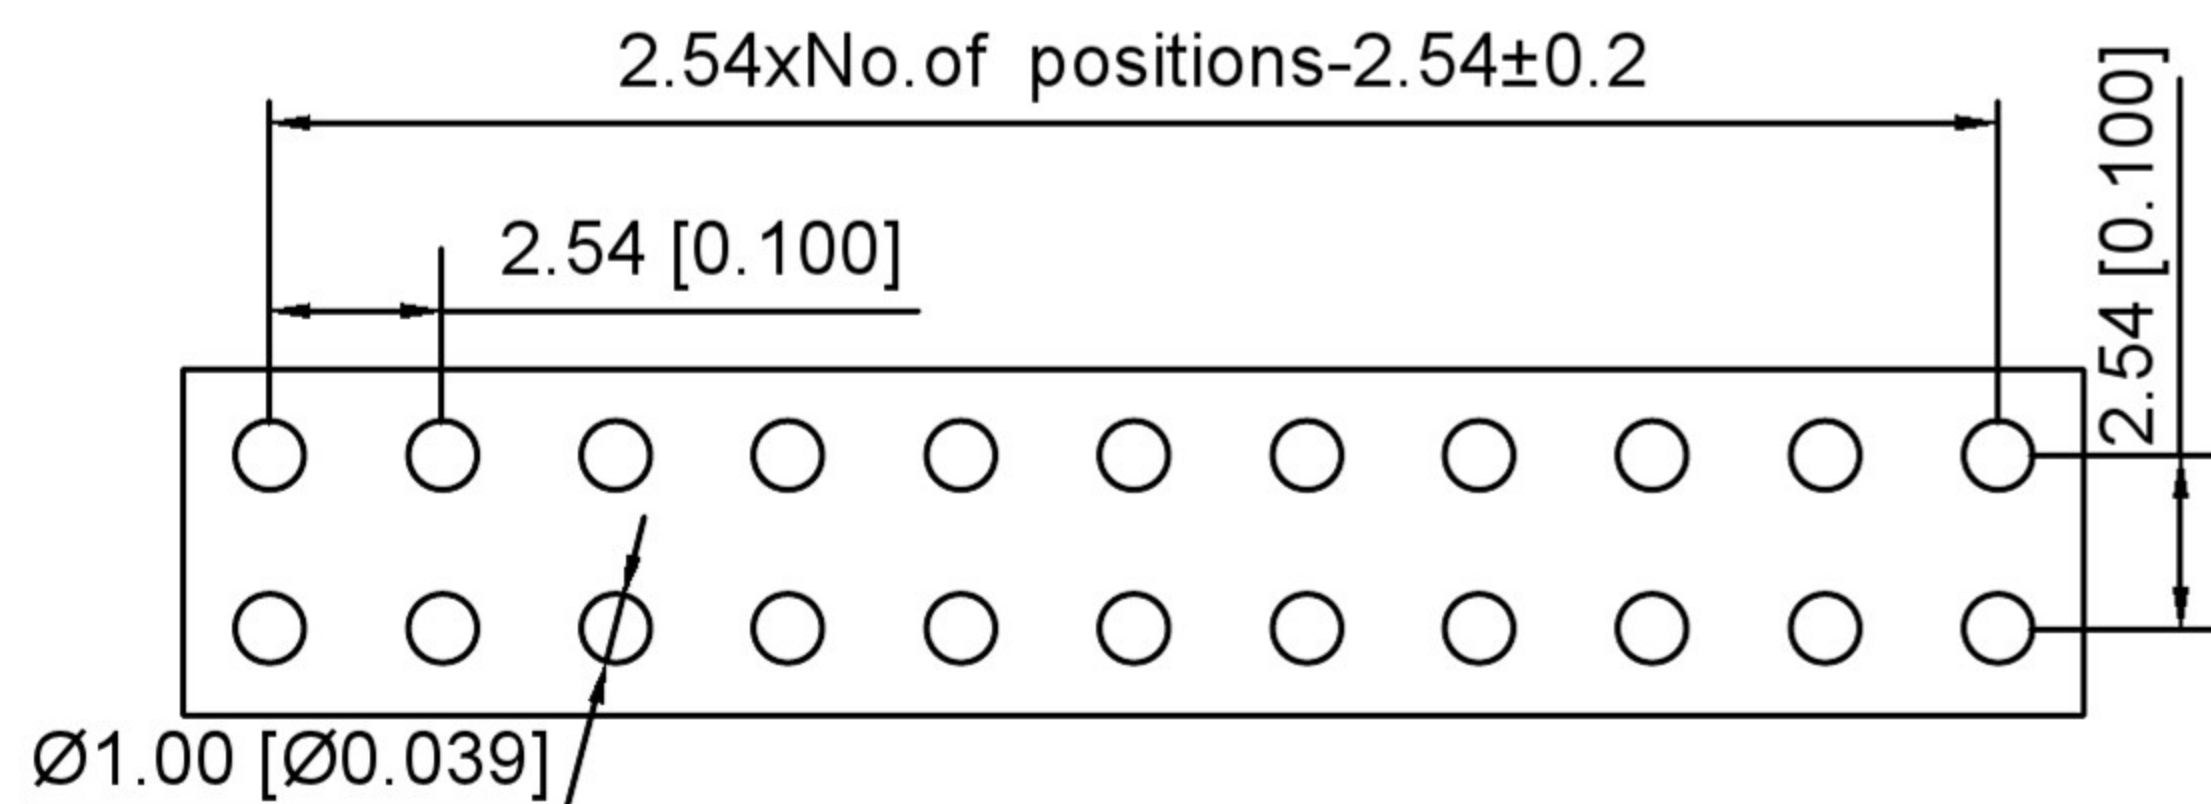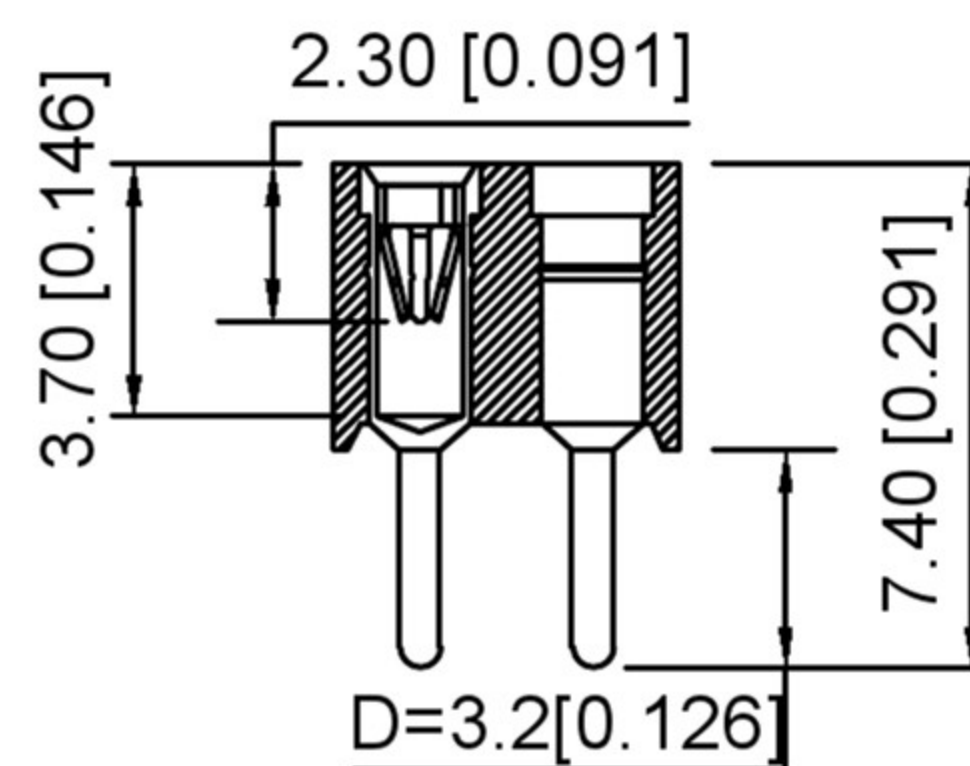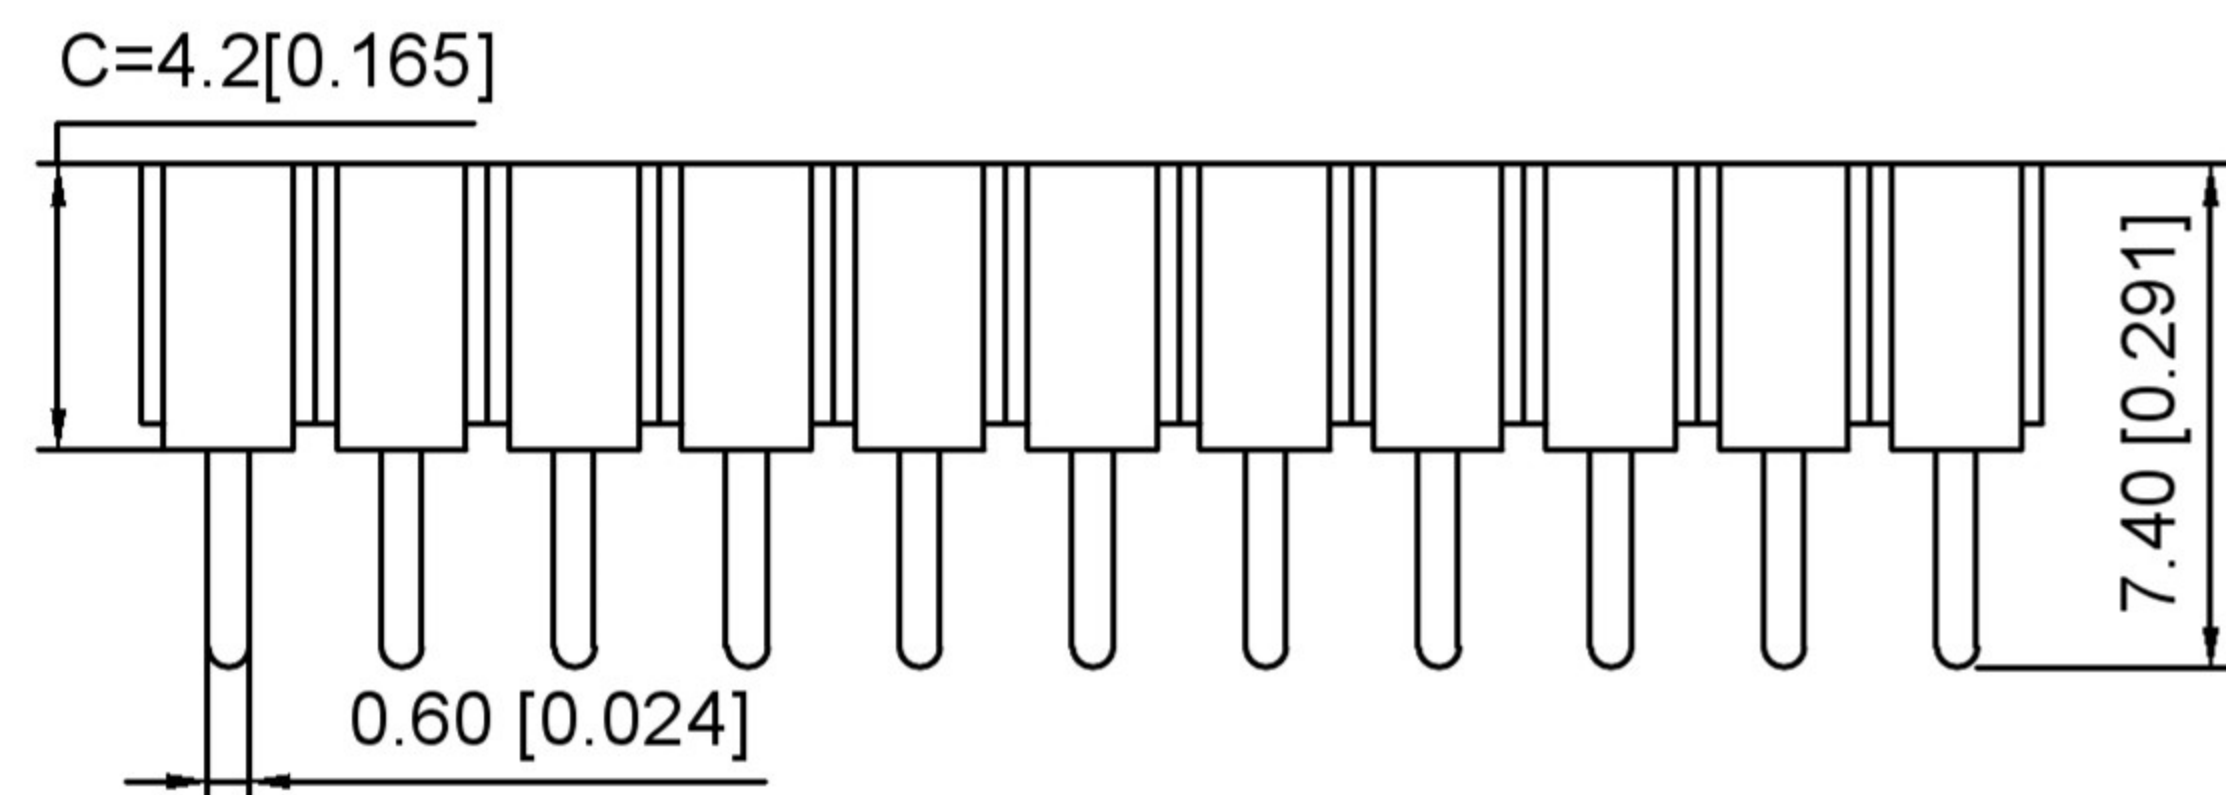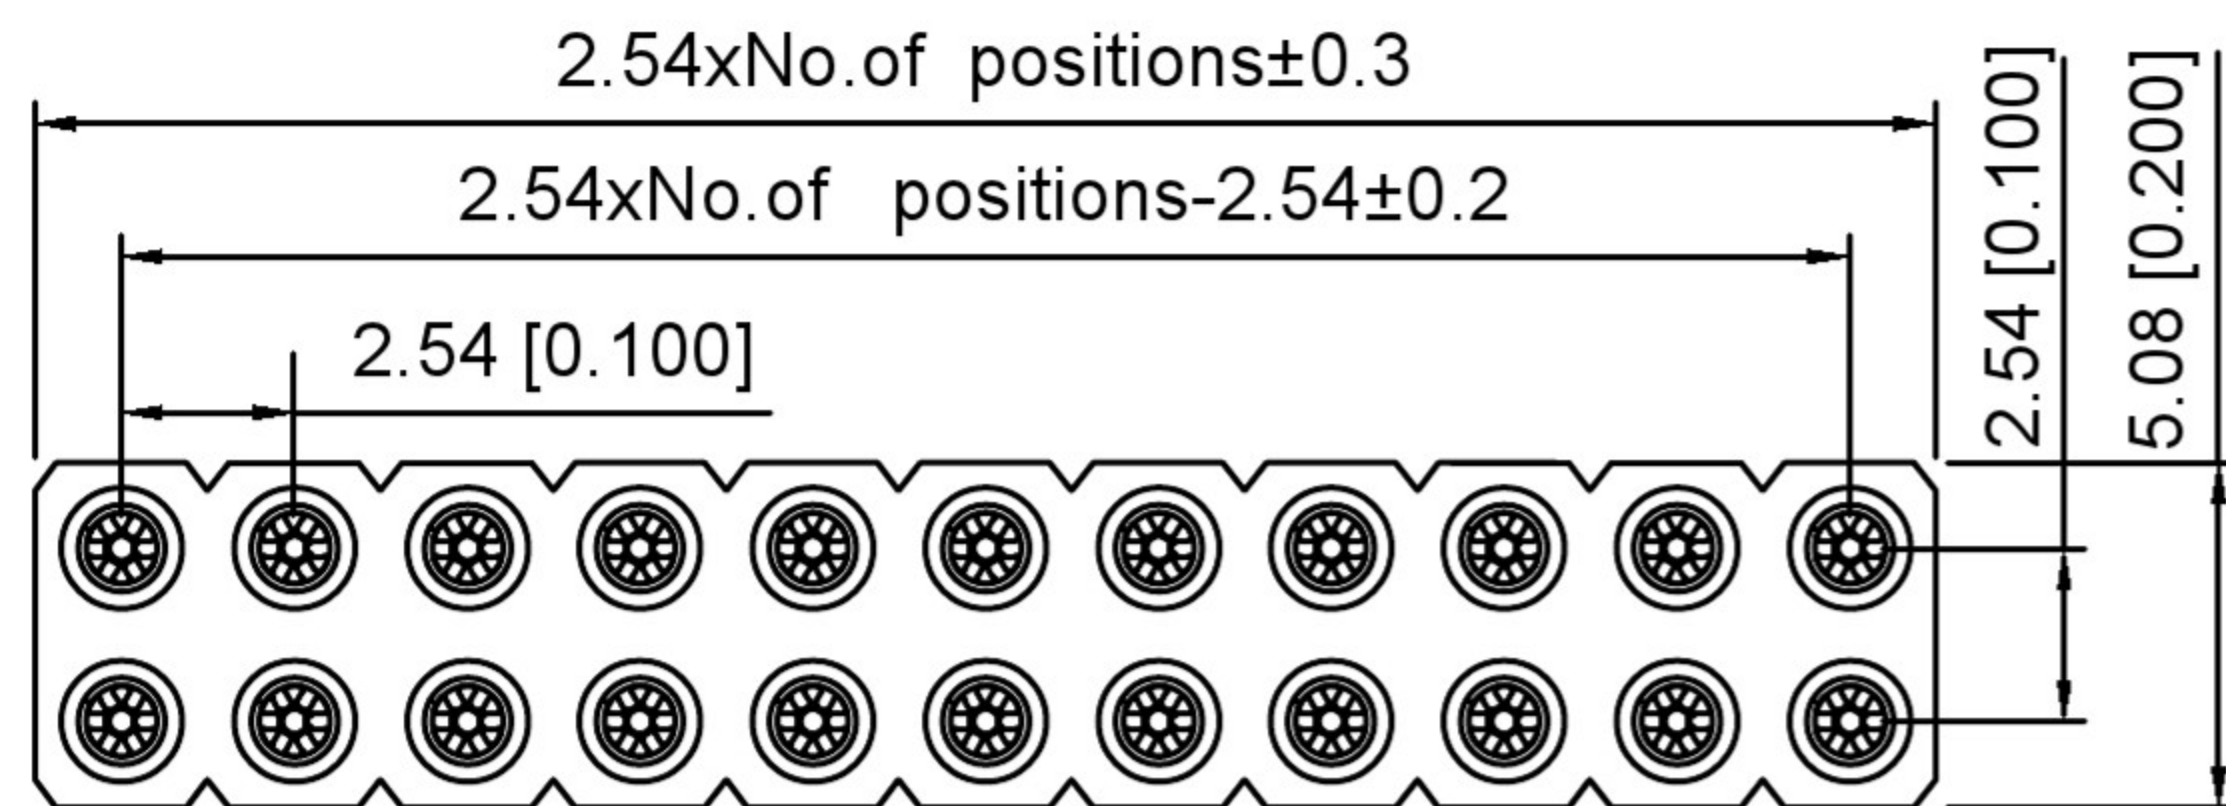

Recommended P . C . B
Layout(±0.05)





Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
Clp (Contact 6 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating PinØ:0.635/0.889mm
Forces:(polished steel gaugeØ0.66mm)
-Insertion:1.2N typ
-Withdrawal:0.6N typ
Mechanical Life:min 500 cycles
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operating temperature:-40 °C to +105°C
Soldering temperature:+255°C

X5521 F V -2xXX- C42 D32 - 0740
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=4.2mm
- 6.Pin Length:D=3.2mm
- 7.0740:Type0740

X5521FV-2xXX-C42D32-0740	PPS	Brass	X5521W
PART NO	Material	Material(Pin)	Suitable Wafer

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_7			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

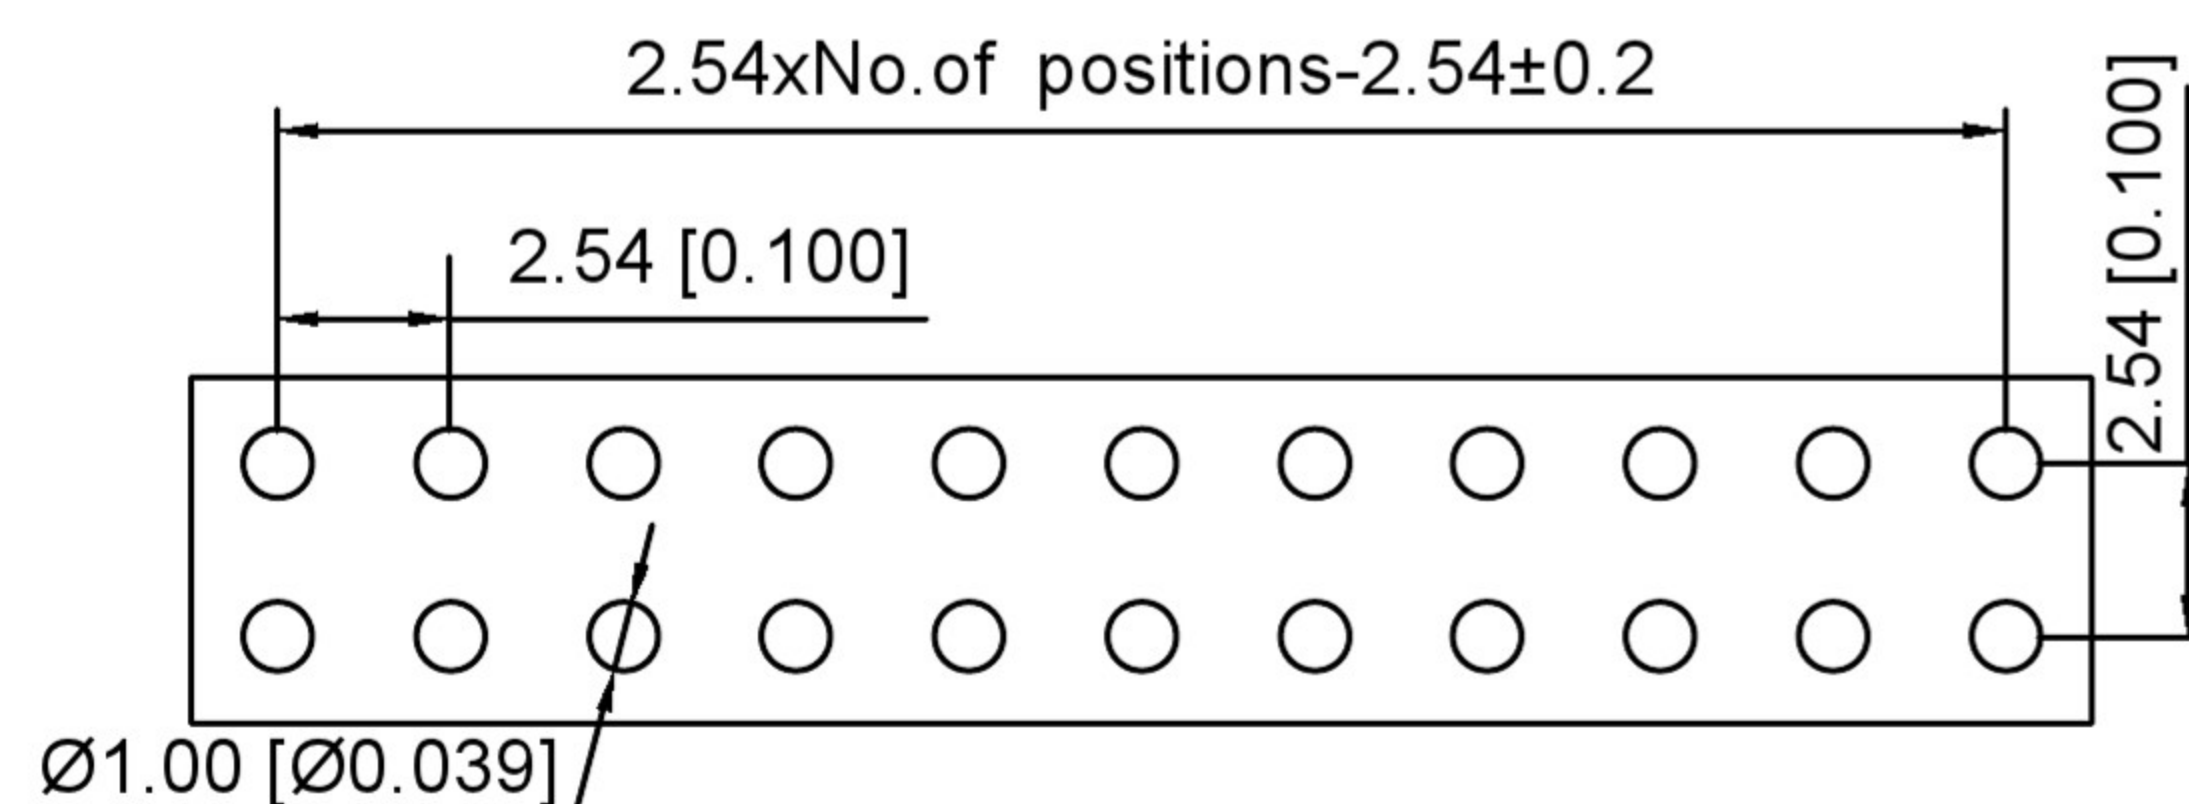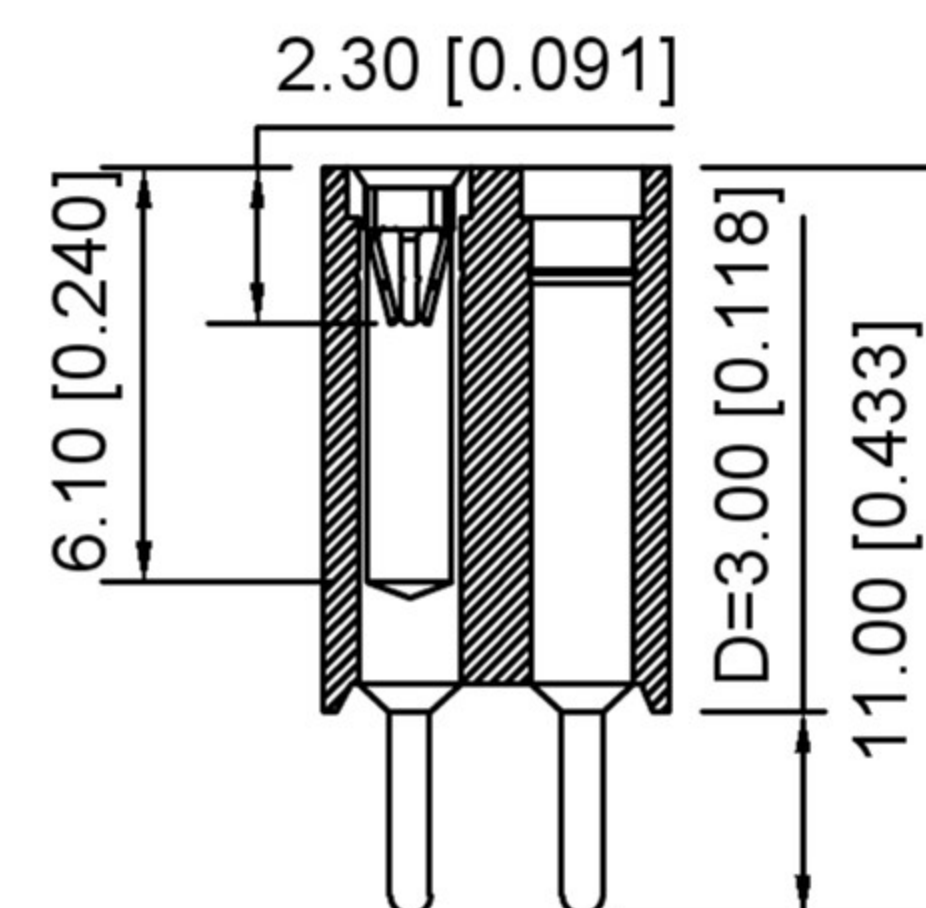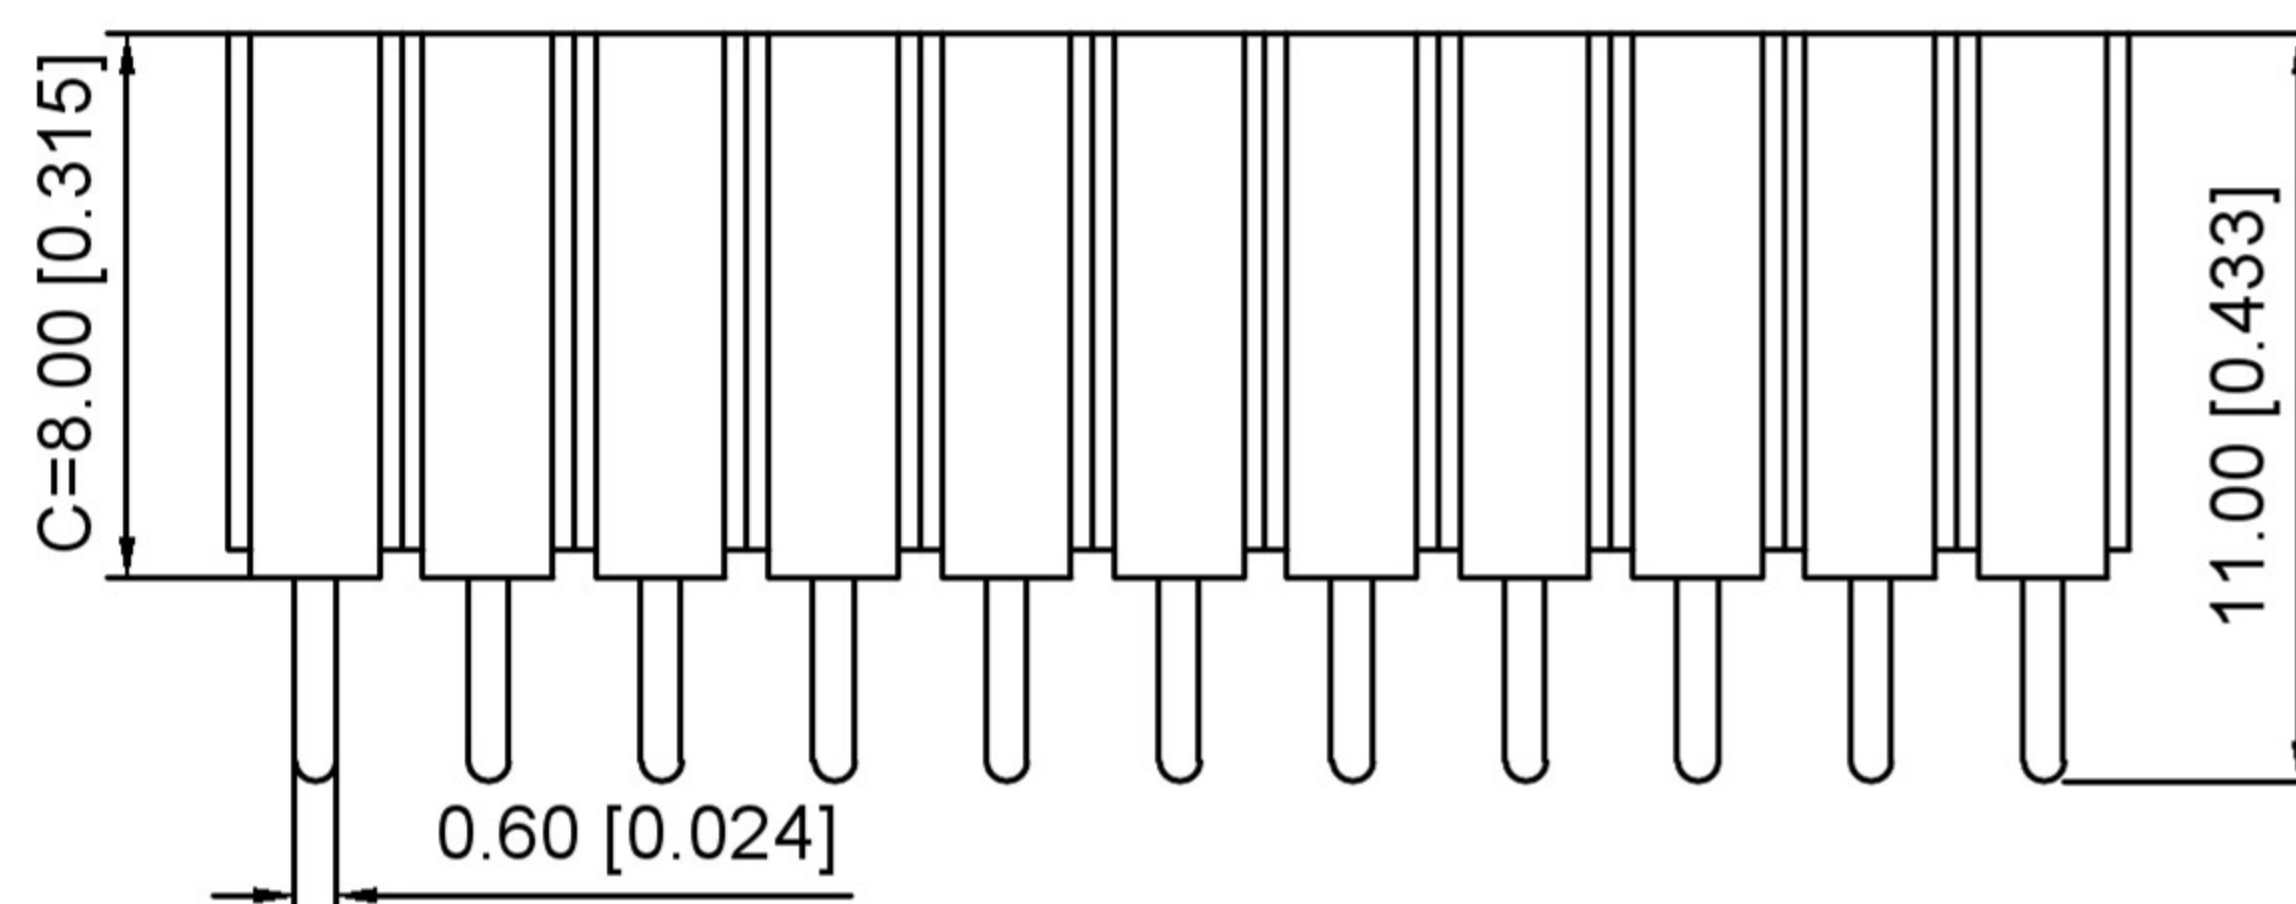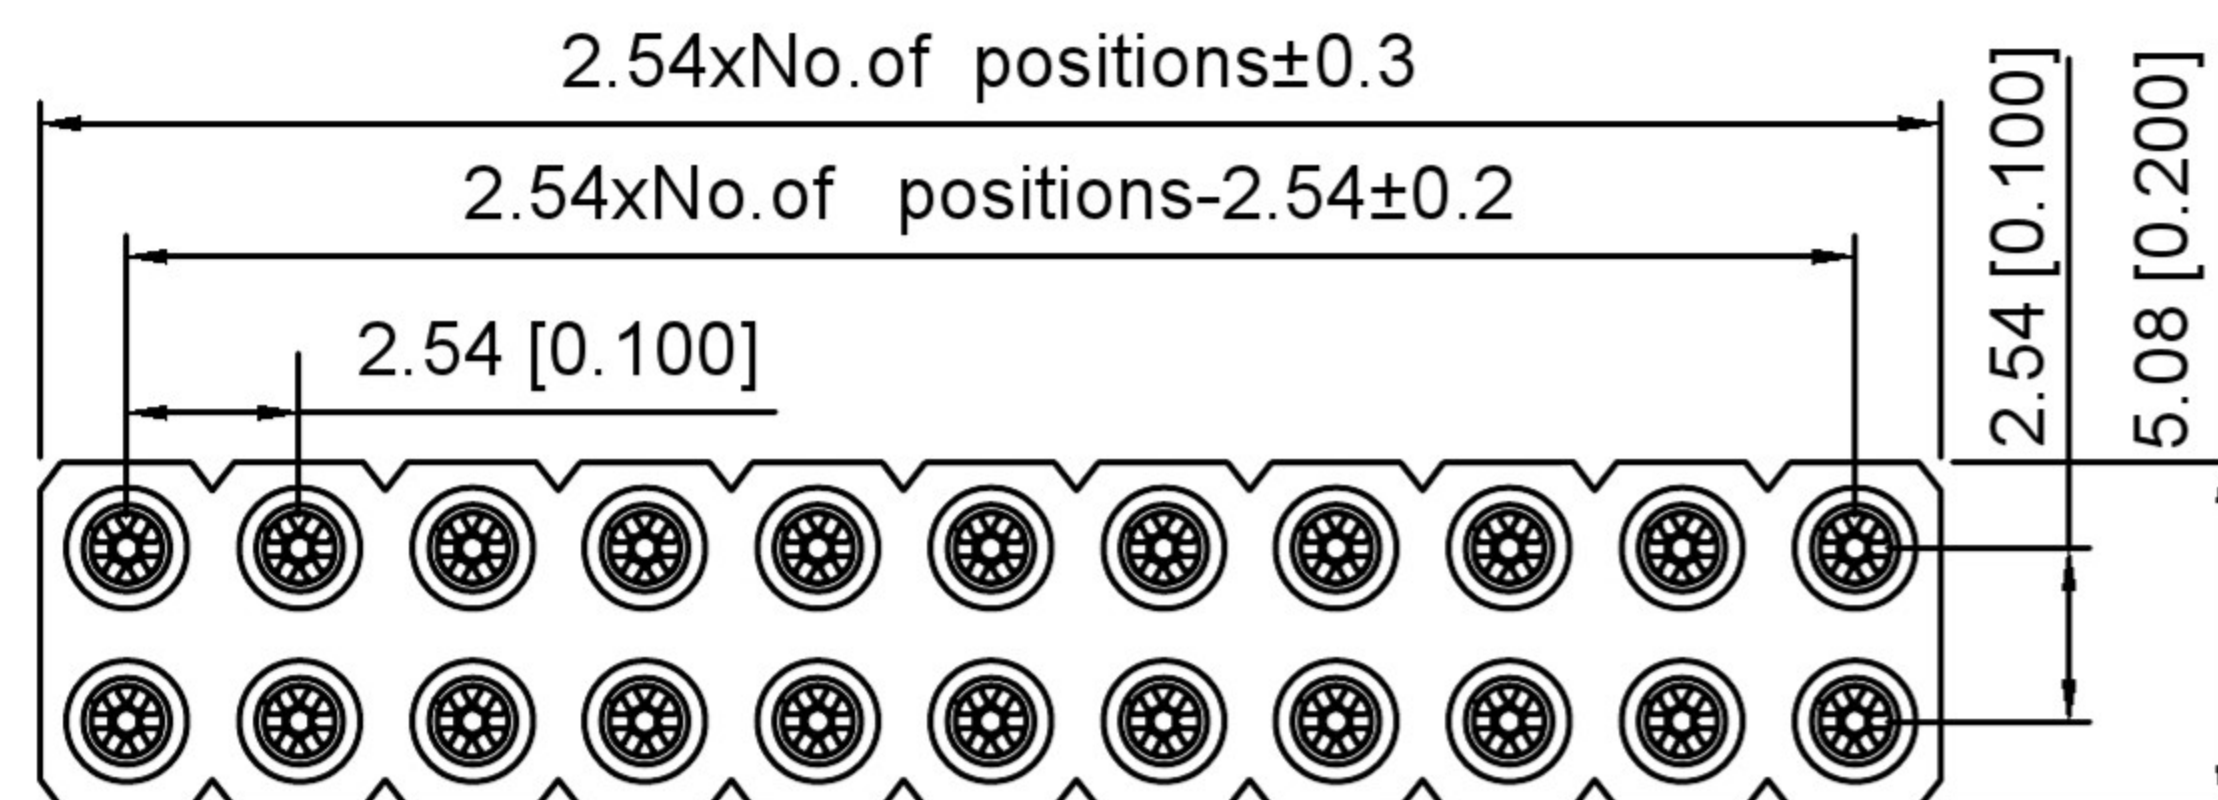

Recommended P . C . B
Layout(±0.05)




Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
ClIp (Contact 6 FInger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating PinØ:0.635/0.889mm
Forces:(polished steel gaugeØ0.66mm)
-Insertion:1.2N typ
-Withdrawal:0.6N typ
Mechanical Life:min 500 cycles
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operating temperature:-40 °C to +105°C
Soldering temperature:+255°C

X5521 F V -2xXX- C80 D30 - 1100
① ② ③ ④ ⑤ ⑥ ⑦


- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=8.0mm
- 6.Pin Length:D=3.0mm
- 7.1100:Type1100

X5521FV-2xXX-C80D30-1100	PPS	Brass	X5521W
PART N0	Material	Material(Pin)	Suitable Wafer

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_8			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.qdxidz.com www.xbswitch.com												1/1	A0

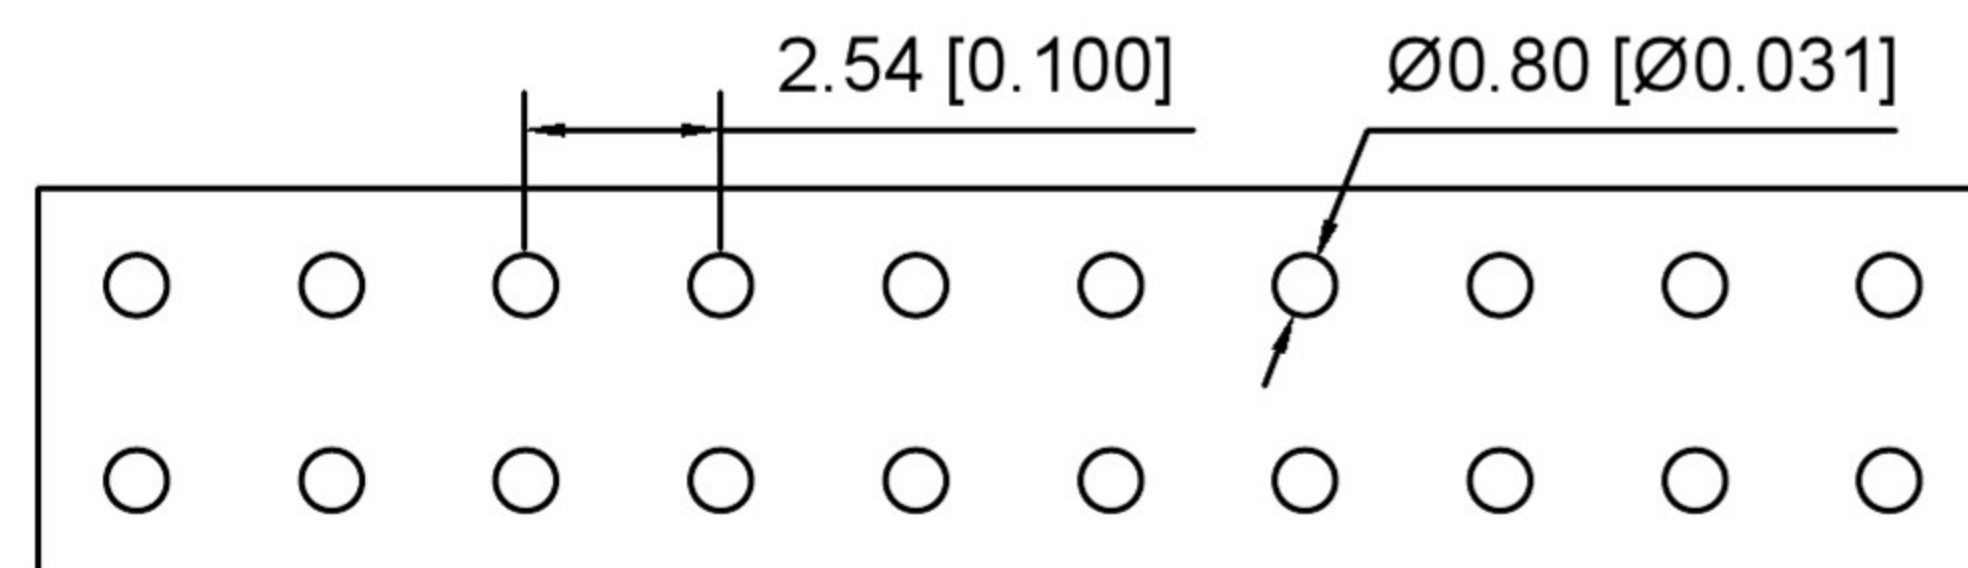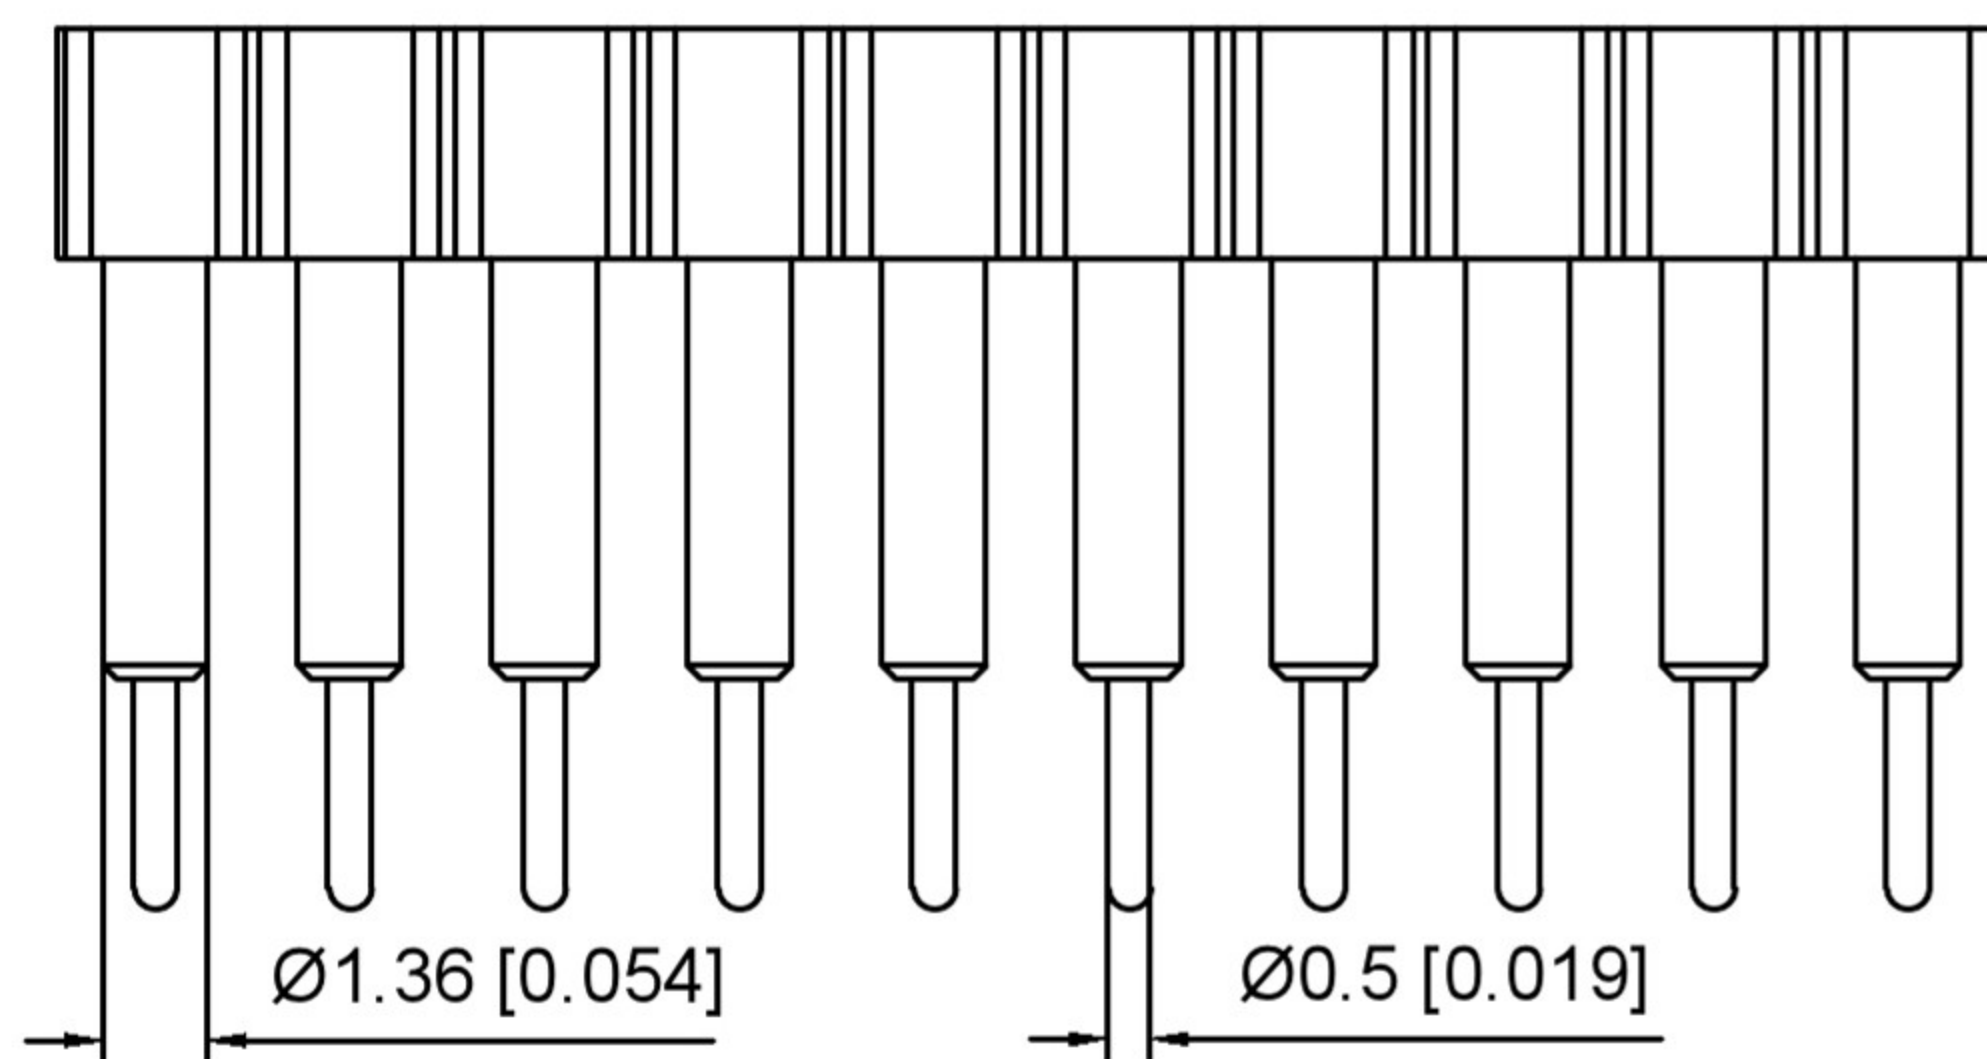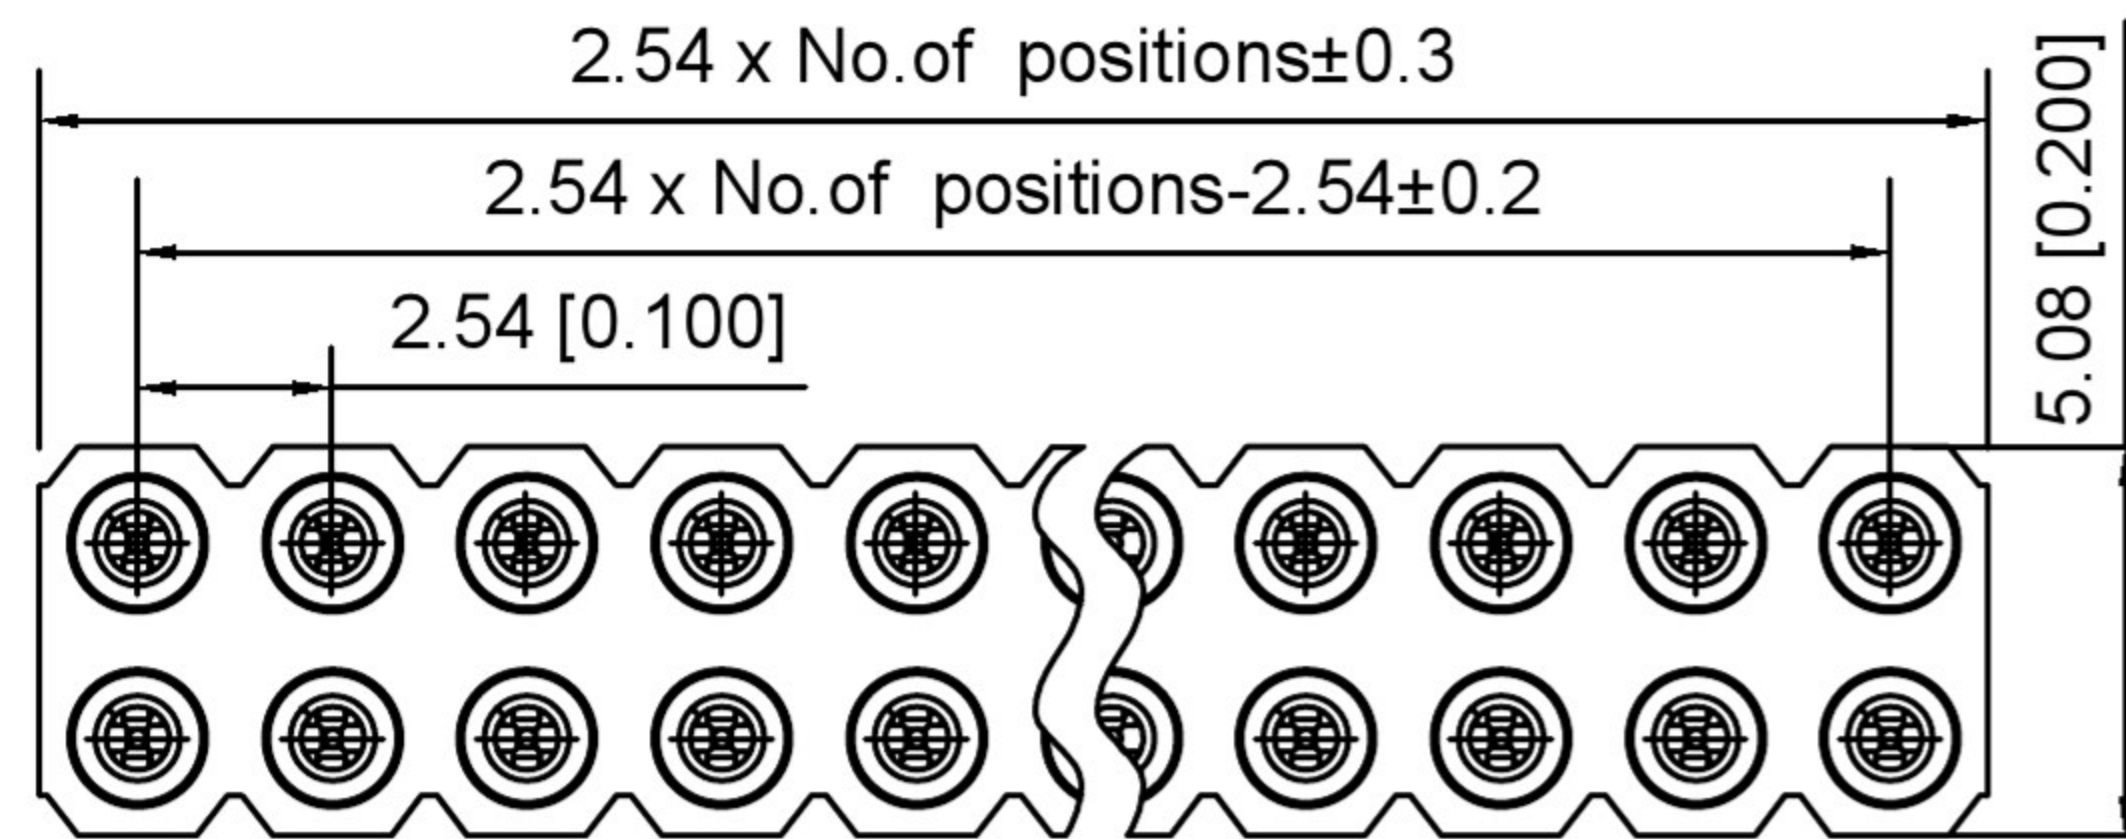

Recommended P.C.B
Layout(±0.05)

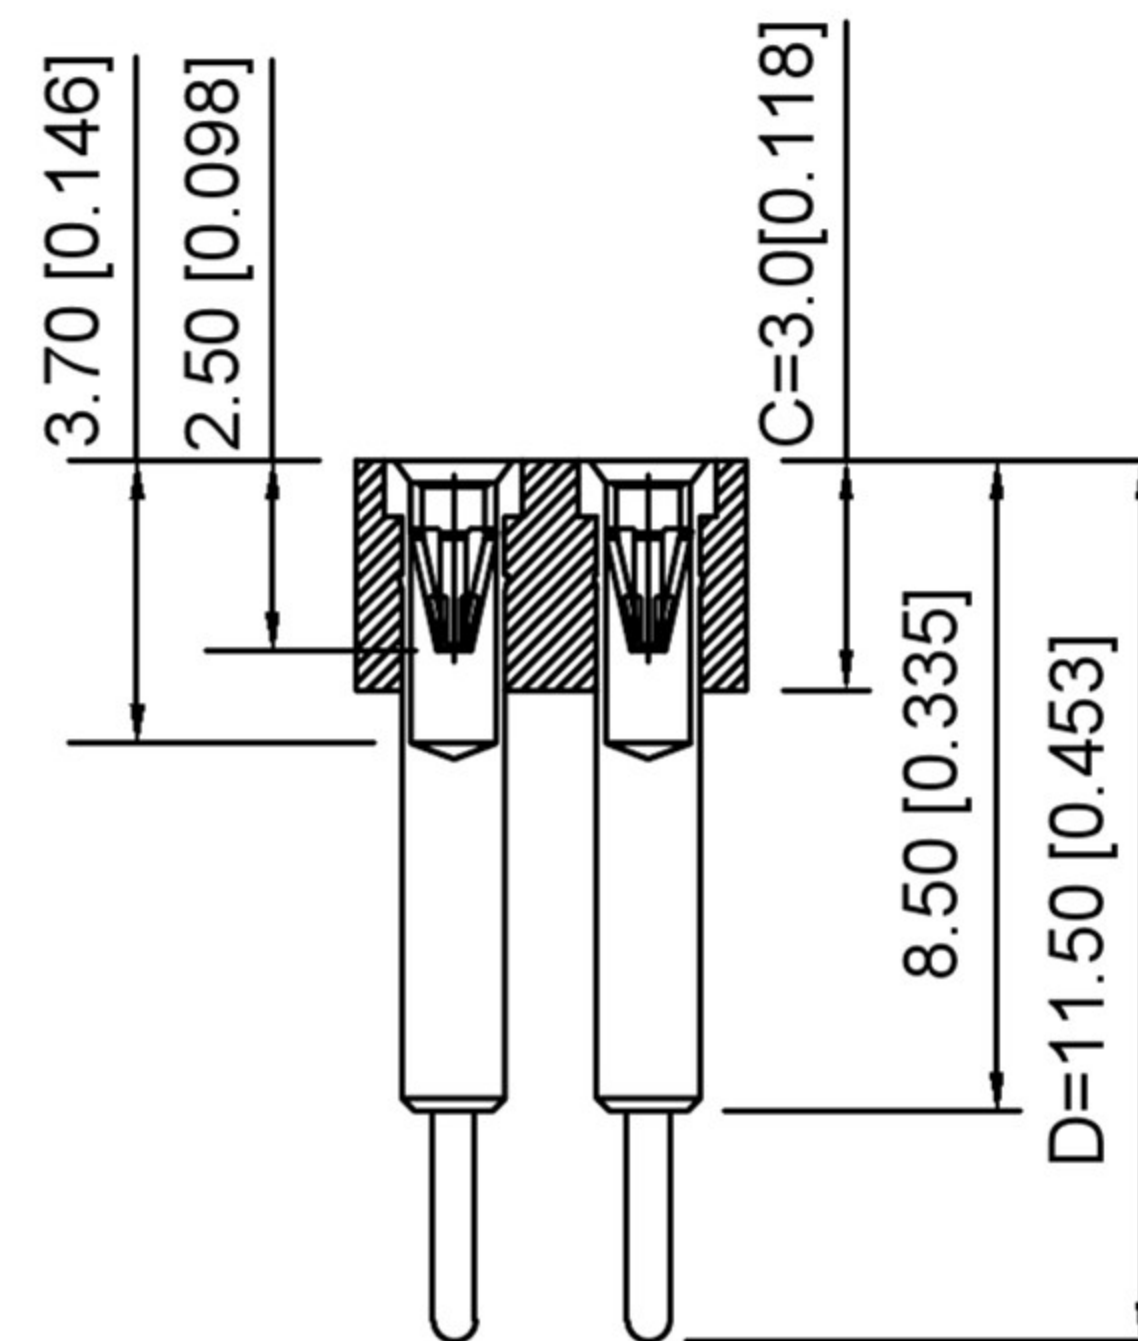

Technical Data

Pin(outer sleeve):Brass,machined CuZn38pb2
Cllp (Contact 4 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Current rating:3Amps
Mating PinØ:0.38/0.56mm
Forces:(polished steel gaugeØ0.43mm)
-Insertion:2N typ
-Withdrawal:1N typ
Mechanical Life:min 500 cycles
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operating temperature:-40 °C to +105 °C
Soldering temperature:+255 °C

X5521 F V -2xXX- C30 D1150 - 1150
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Row No-Pin No:2xXX-2x01Pin-2xXXPin
- 5.Plastic Height:C=3.0mm
- 6.Pin Length:D=11.50mm
- 7.1150:Type1150

X5521FV-2xXX-C30D1150-1150	PPS	Brass	X5521W
PART NO	Material	Material(Pin)	Suitable Wafer

						 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X5521_9			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0