

REMARKS:

1.CONTACT INSERTION AND WITHDRAW FORCE:

- 1.1.Insertion force :5N-20N max.
- 1.2.Withdrawal force :8N-20N.
- 1.3.Durability :10000Cycles.

2.ELECTRIC PROPERTY:

- 2.1.Contact current rating:3A.
- 2.2.Dielectric Strength :100V AC (RMS)
- 2.3.Insulation Resistance :100 megaohms min.
- 2.4.Contact resistance  
40mOhms MAX.FOR VBUS,GND AND OTHER CONTACT  
50mOhms MAX.AFTER ENVIRONMENT TEST.

3.AMBIENT TEMPERATURE:


- 3.1.Operating temperature:-55°C to +85°C.

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

## U261-24XN-4BS61

- 1:AU 1U"
- 2:AU 3U"
- 5:AU 15U"
- 6:AU 30U"

6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating:Cu Ni
4	Terminal	C5191 T=0.15mm	Ovep-plating:Au Ni/Sn
3	Latch	SUS T=0.3mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0

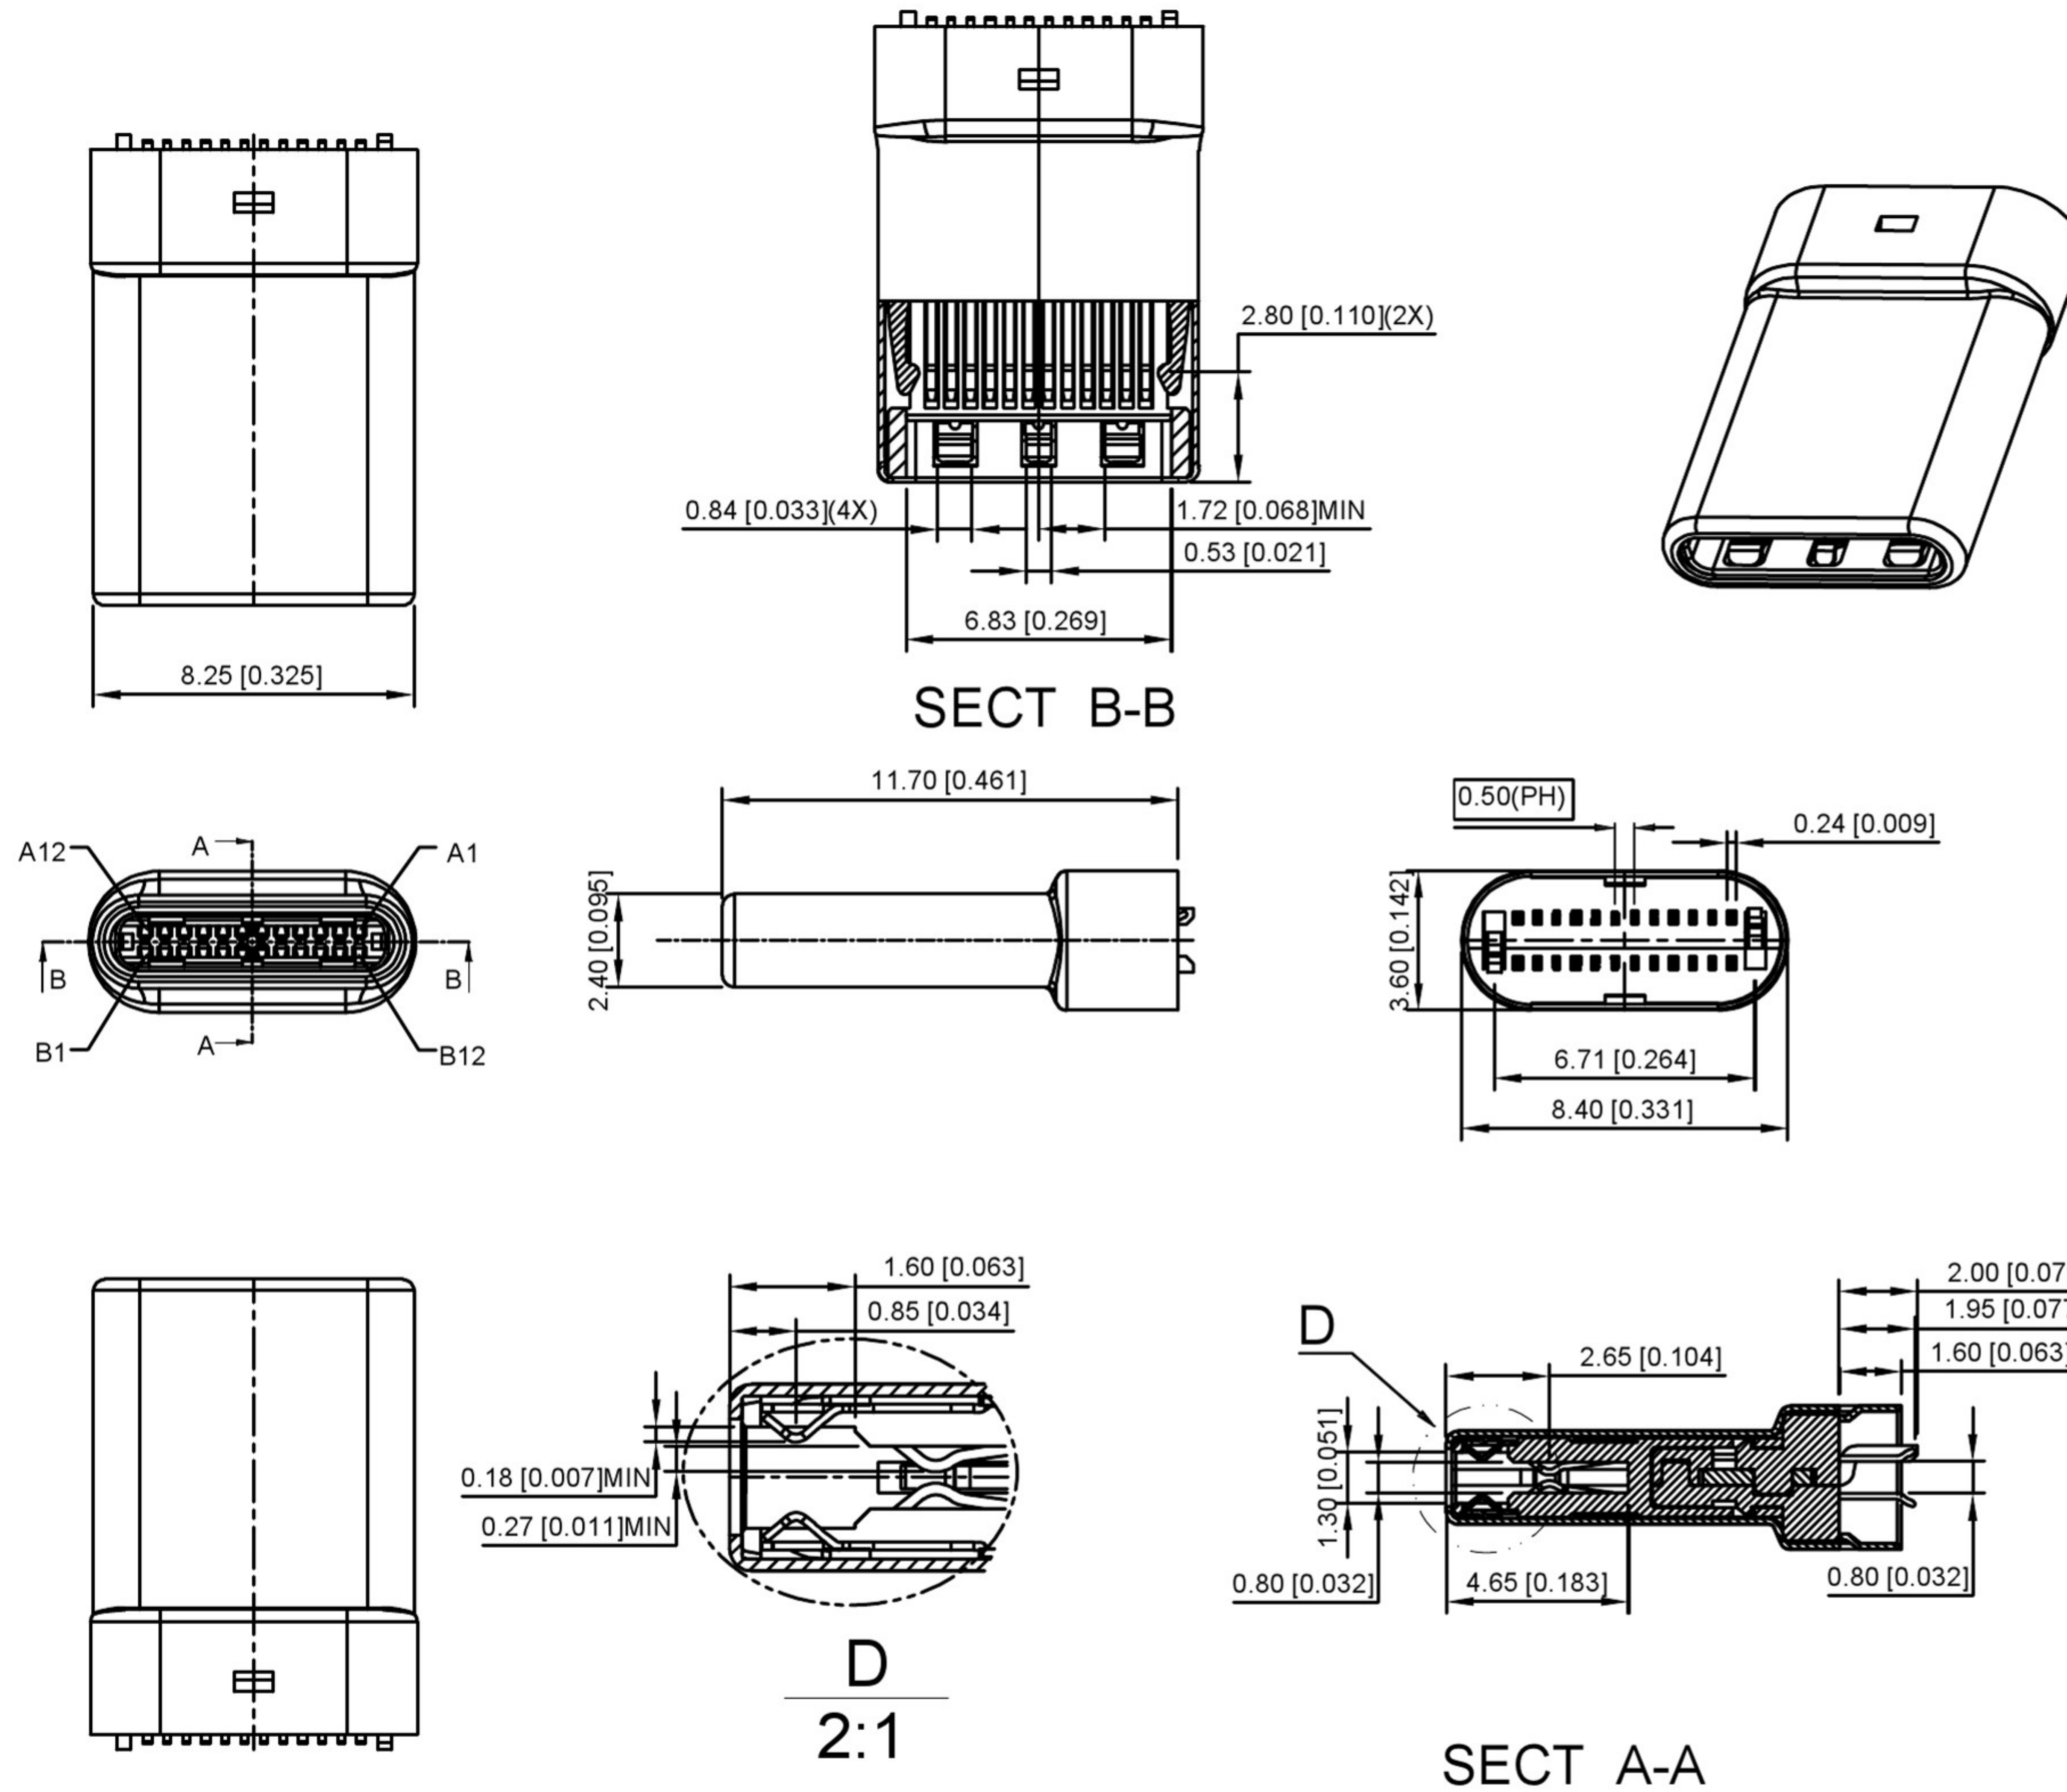

MODEL TYPE: Type-C 3.1

PART NO.:

DWG NO.: XB-U261-24XN-4BS61

WEIGHT SHEET REVISION  
1/1 A0

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES



DONG GUAN XI BANG ELECTRONIC CO., LTD

REVISIONS

www.alpsr.com www.gdxjdz.com www.xbswitch.com

DATE REVISED APPROVED