

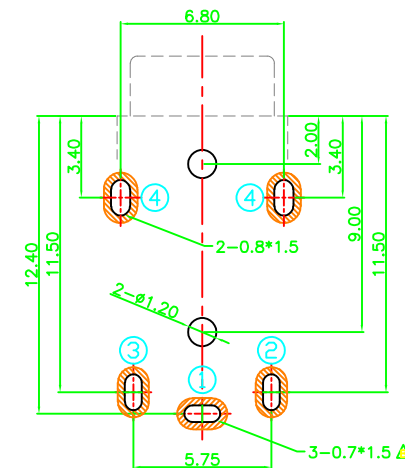

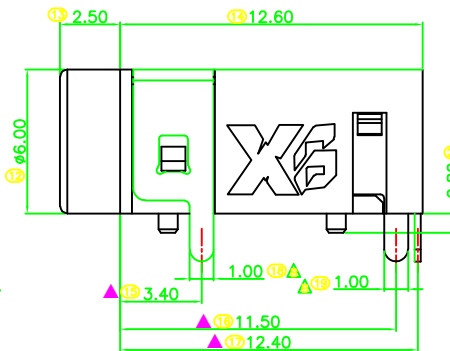
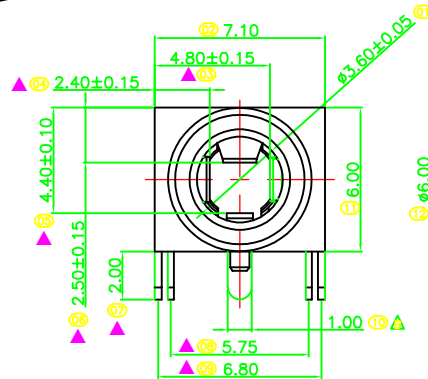
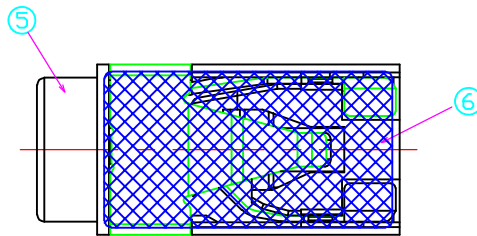
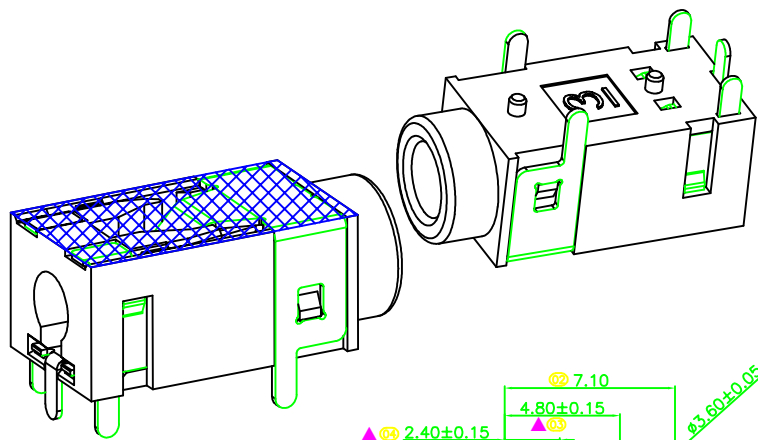


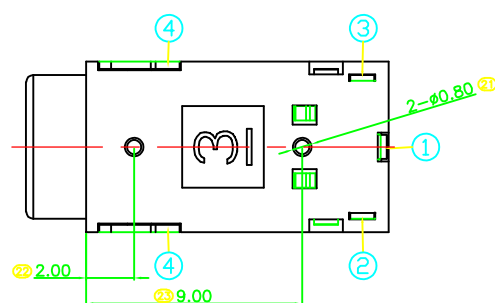

RECOMMENDED PCB LAYOUT

备注:

- 1.额定电流: DC 30V,1A
- 2.接触阻抗: 30mΩ MAX.
- 3.绝缘阻抗: 100MΩ MIN.
- 4.耐电压: 500V AC
- 5.使用寿命: 5000次
- 6.插入力: 4-25N
- 7.拔出力: 4-25N
- 8.盐雾: 24 HOURS
- 9.回流焊温度: 260°C±5°C
- 10.标注"(XX)"为FAI量测尺寸
- 11.标注"▲"为重点检验尺寸

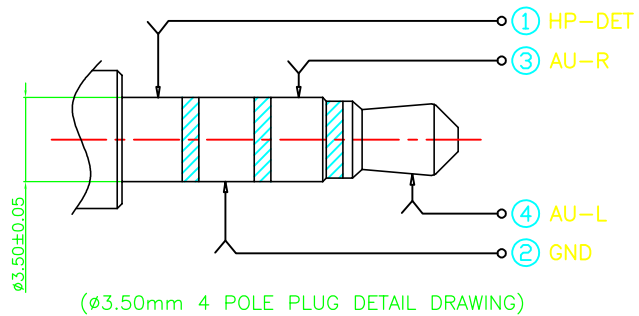

⑥	唛拉(Mylar)	1	Polyimide	Yellow
⑤	HOUSING	1	PPA,UL94V-0	BLACK
④	CONTACT D	1	C2680 T=0.30mm	Plating 5u"Ag Min
③	CONTACT C	1	C5191-EH T=0.25mm	Plating 5u"Ag Min
②	CONTACT B	1	C5191-EH T=0.25mm	Plating 5u"Ag Min
①	CONTACT A	1	C5191-EH T=0.25mm	Plating 5u"Ag Min
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCES



XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—
3RD ANGLE PROJECTION		UNIT: mm	



DESIGN:	Tony
CHECK:	
APPROVED:	Andy
2021.11.23	

PART NAME:	Φ3.5 AUDIO JACK
PART NO.	XB-PJ03504-0998-00000H
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

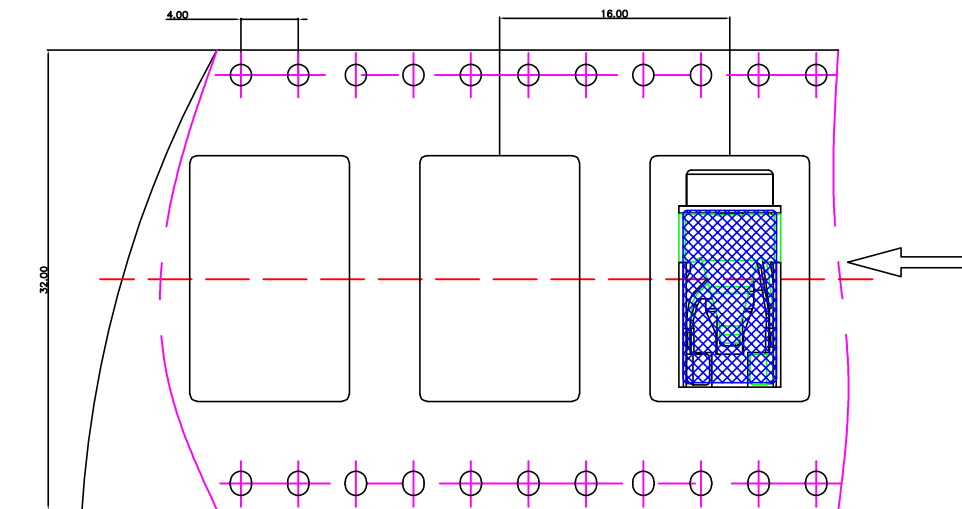


示意图

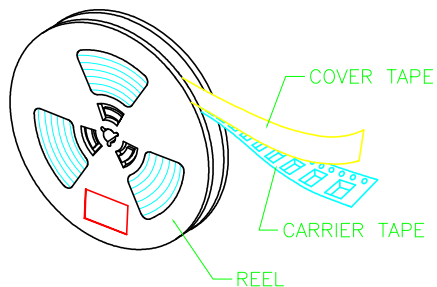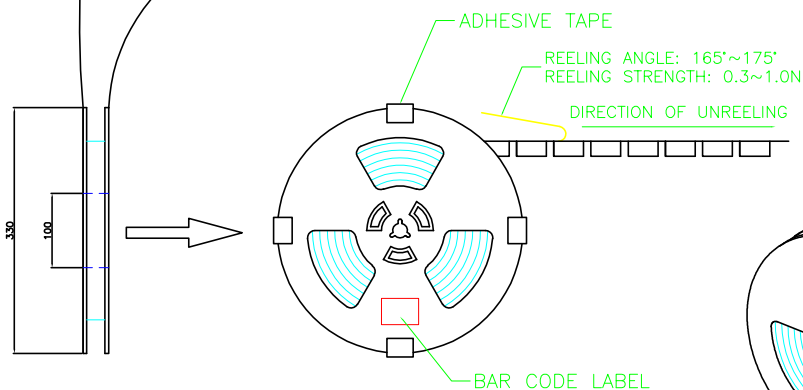


NOTES:

1. 包装数量: 500PCS/盘
2. 载带包装方式



3. 数量: 4000PCS/箱
4. 载带颜色: 白色透明/冷封
5. 载带厚度: PET, 0.40mm
6. 净重: 3.52KG 0.88g/PCS
7. 毛重: 8.26KG

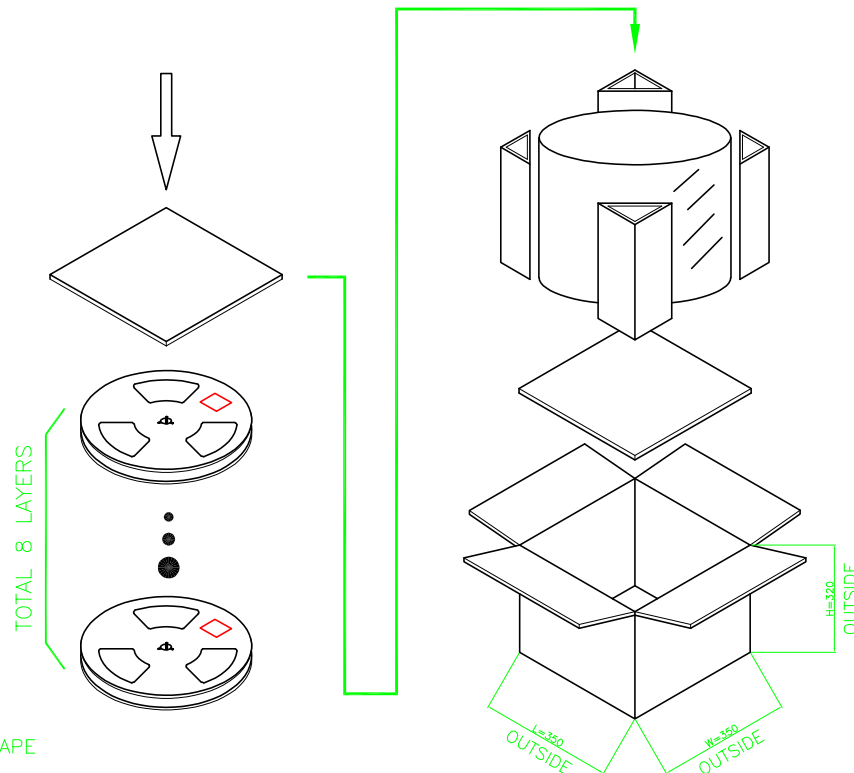

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
DECIMALS:		ANGLES:		DESIGN:	Tony 2021.11.23	PART NAME: Φ3.5 AUDIO JACK — 包装图			
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-PJ03504-0998-00000H			
X.	±0.50	X.	±2°			 3RD ANGLE PROJECTION	UNIT: mm	SHEET: 1/1	REV.: A1
X.X	±0.30	X.X	±1°					DRAWING NO	
X.XX	±0.20	X.XX							
X.XXX	±0.10	X.XXX		APPROVED	Andy 2021.11.23				