

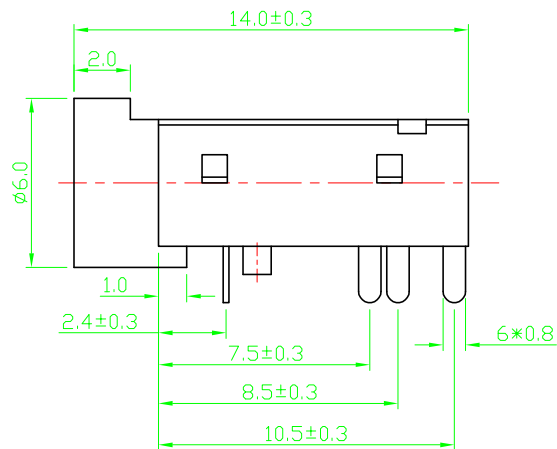
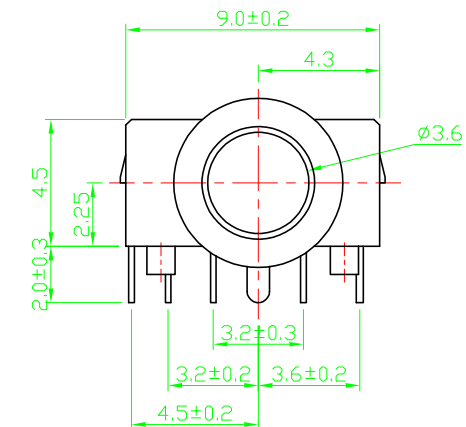



Ø3.50mm 3 POLE PLUG

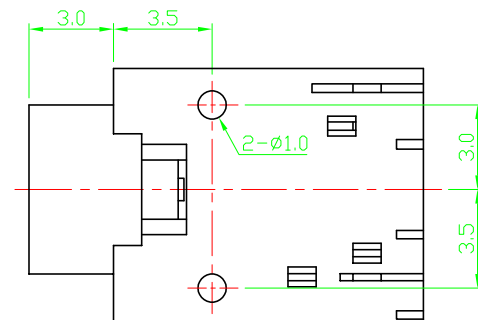

P.C.B LAYOUT
TOP VIEW

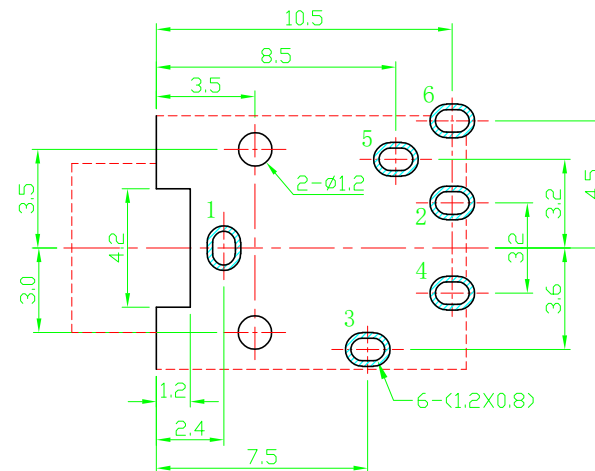


SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

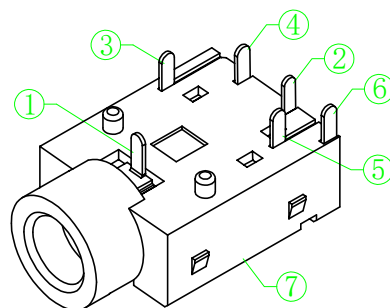

7	HOUSING	1	PBT	
6	CONTACT FOOT	1	BRONZE	Ag-Plating
5	SPRING PIECE	1	BRONZE	Ag-Plating
4	CURVE PIECE	1	BRONZE	Ag-Plating
3	SPRING PIECE	1	BRONZE	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	CONTACT FOOT	1	BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ 3. 5mm Phone Jack CONN.
DIM	TOL	DIM	TOL	CHECK:	2020.3.15	
X.	±0.50	X.	±2°			
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	——	APPROVED	Andy	PART NO. XB-PJ03506-1038-00000H
X.XXX	±0.10	X.XXX	——		2020.3.15	SHEET: 1/1 REV.: A1
					UNIT: mm	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------