

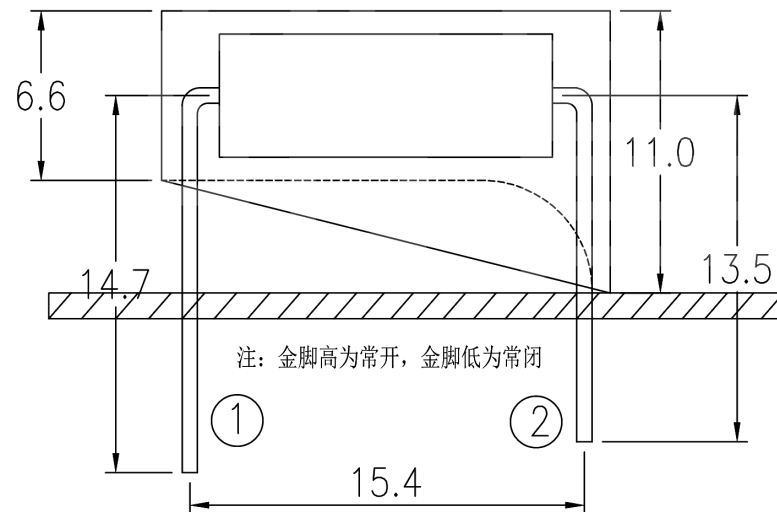
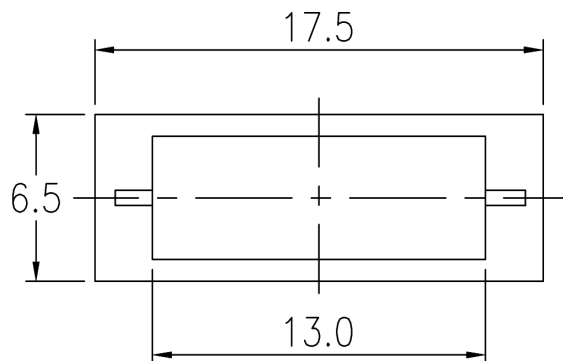
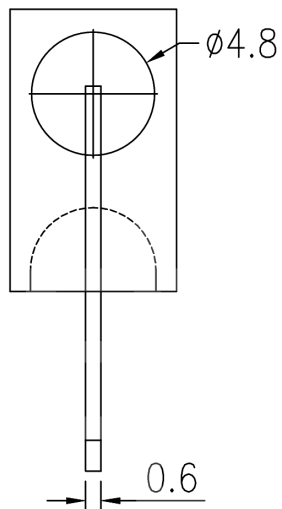


CAD FILE:

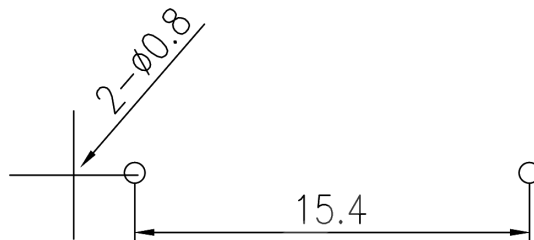

CIRCUIT

P.C.B LAYOUT
TOP VIEW

电气特性: Electrical:

1. 额定电流: 0.2A 2. 额定电压: 12V
3. 导通时间: 约2ms 4. 开路电阻: >10M ohm
5. 耐温: -40℃-+80℃ 6. 闭路电阻: <2 ohm
7. 端子拉力: 500gf/min 8. 湿度: 95RH 40℃, 96H
9. 操作寿命: 80,000周期以上

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Vibration Switch			UNIT : mm	DRWG NO.:XB-SW-460-25N10G
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D DONG. PANG 2012-9-25	
1	KNOB	PPA	1	BLACK				APPD. ZENQ. CHEN 2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH					