
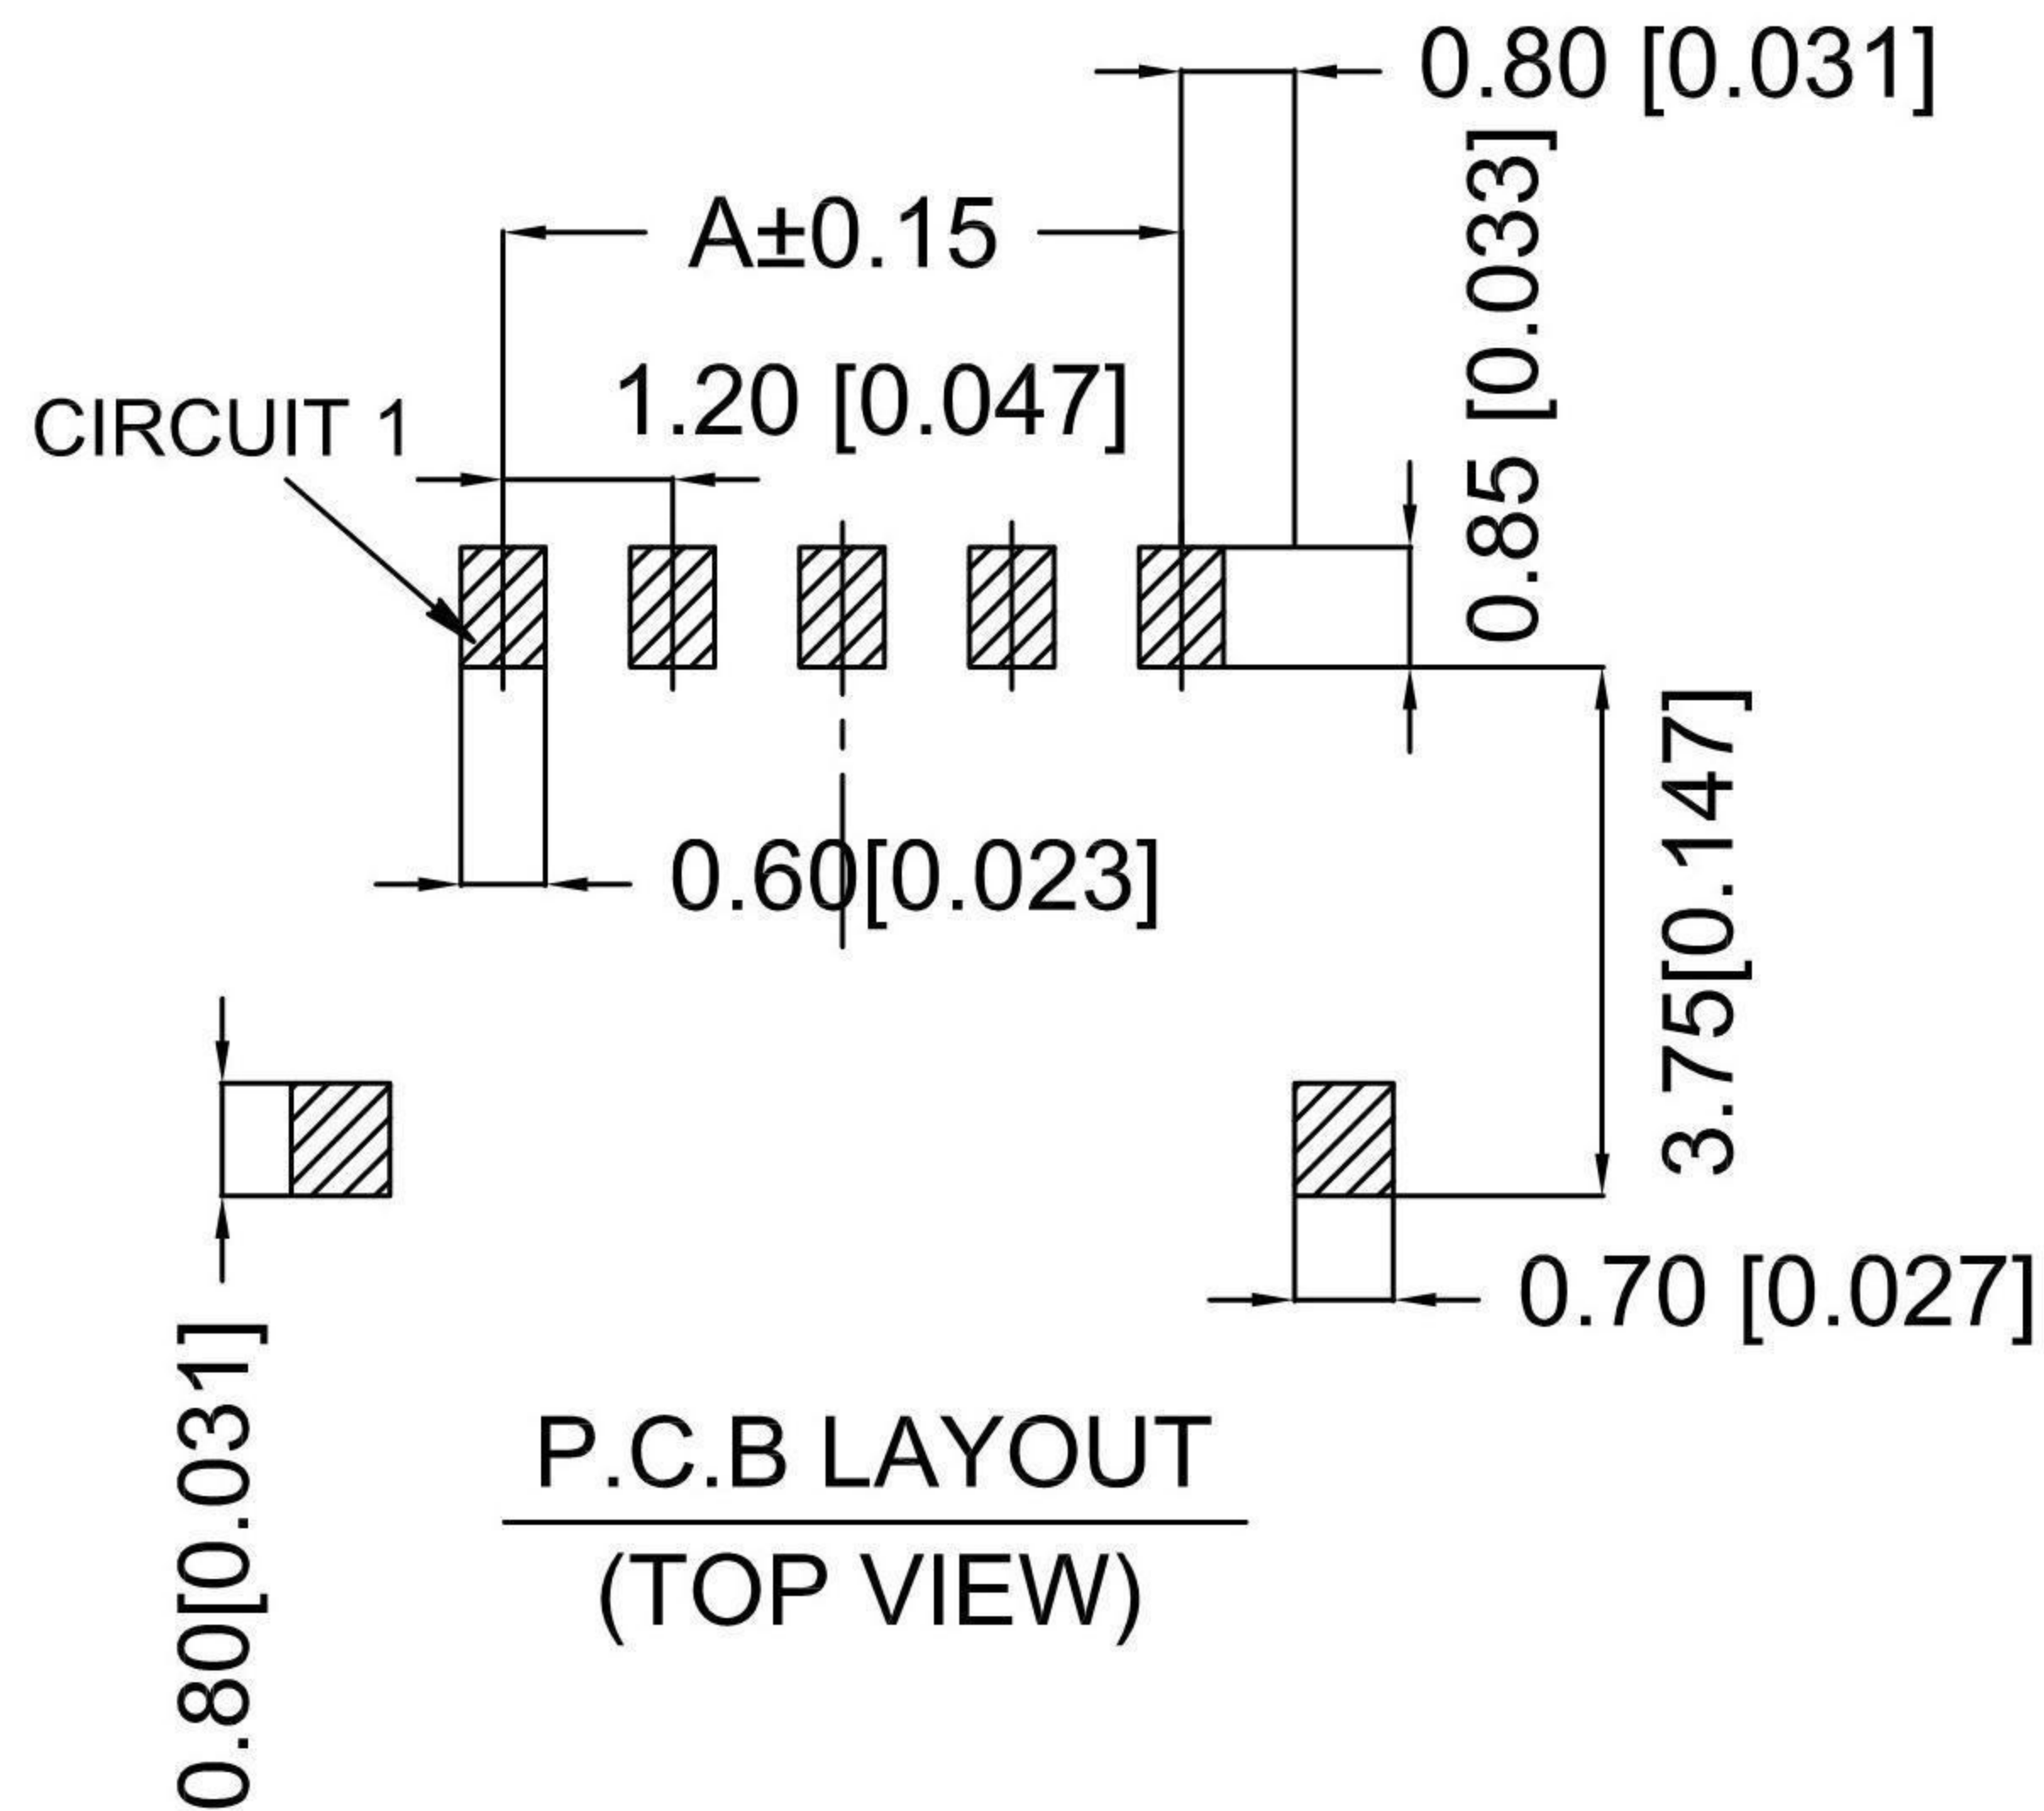
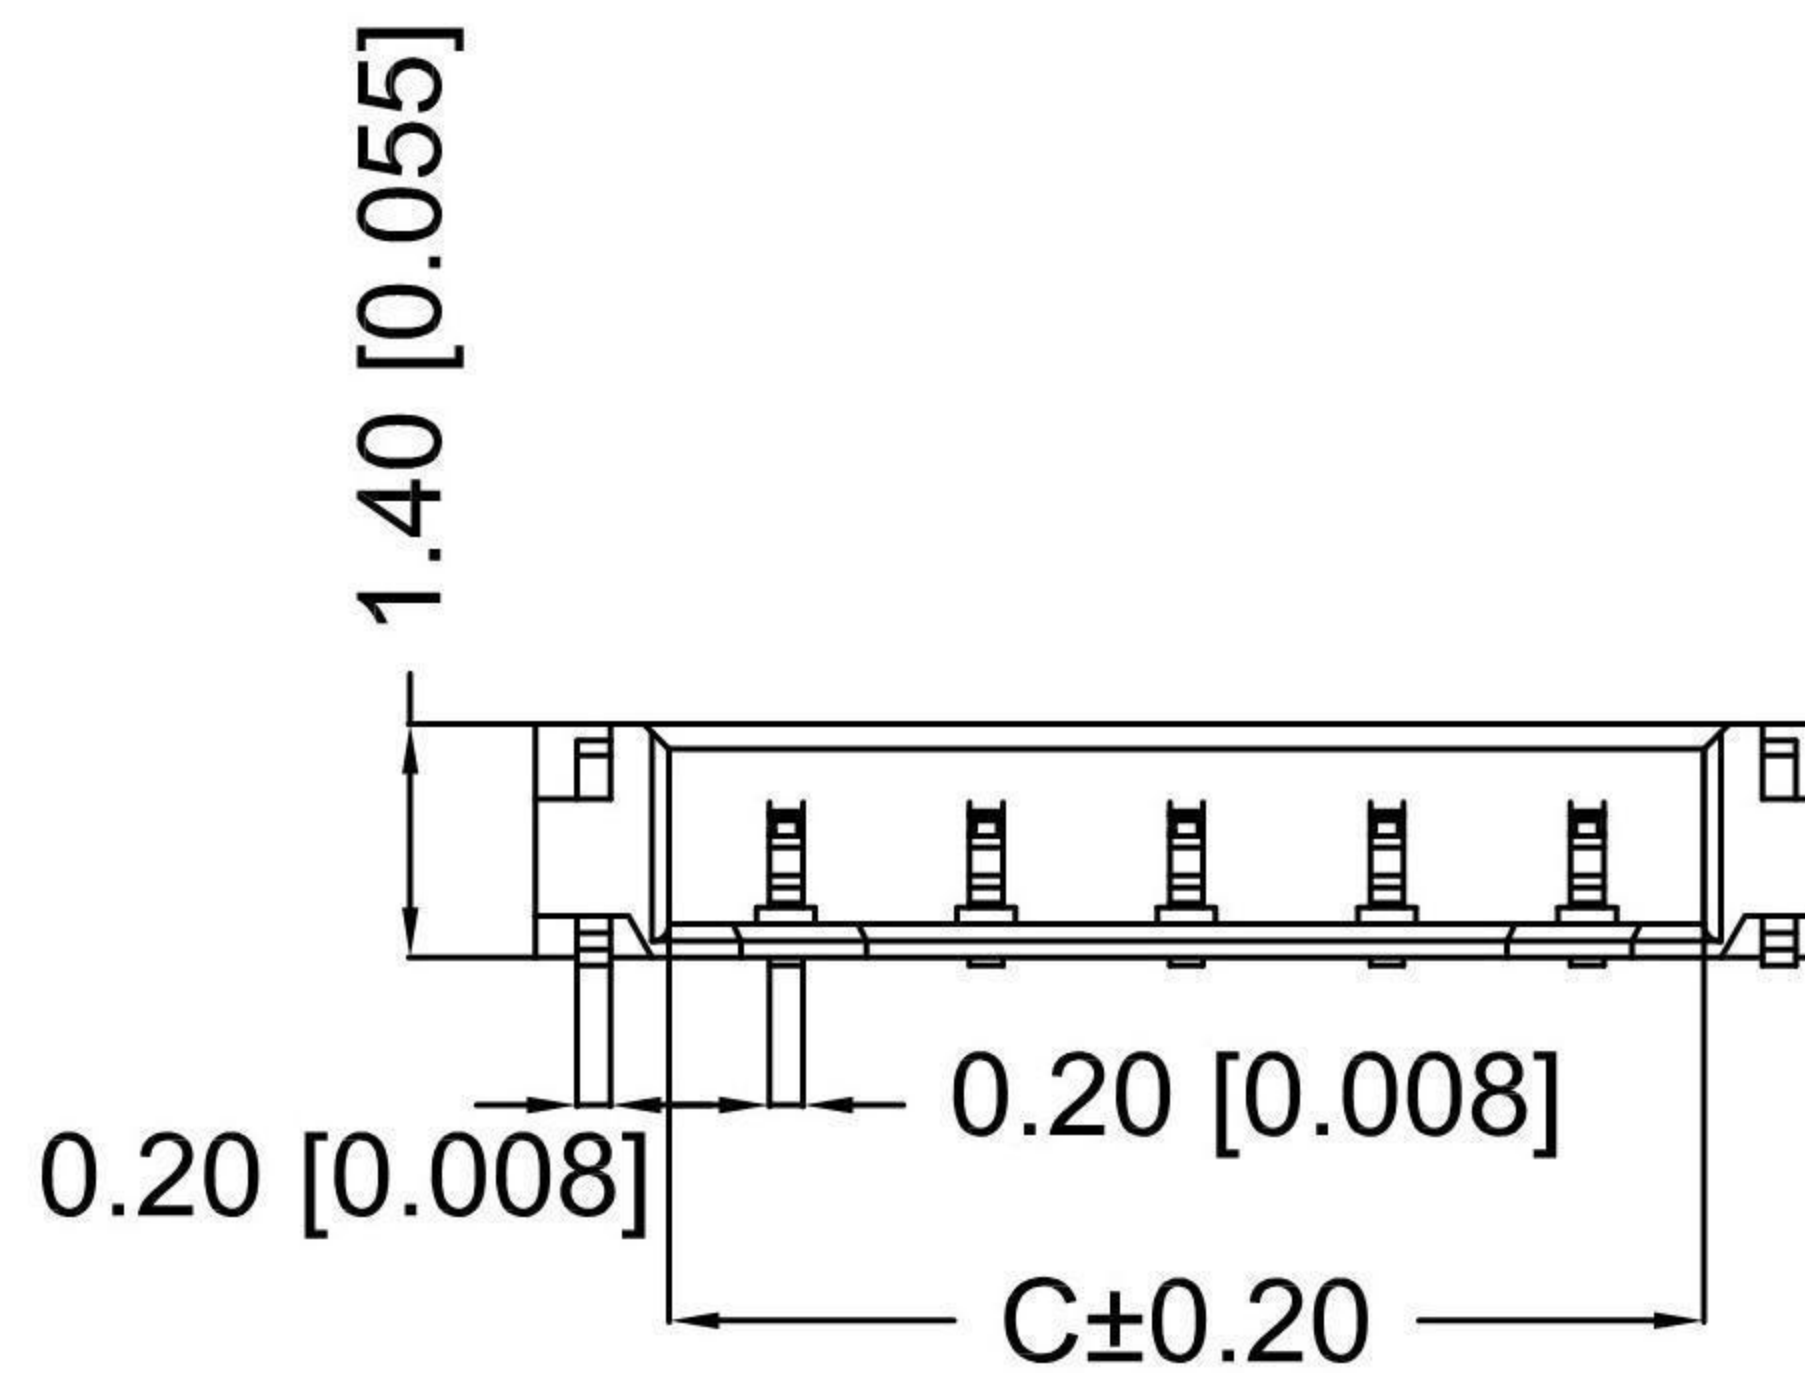


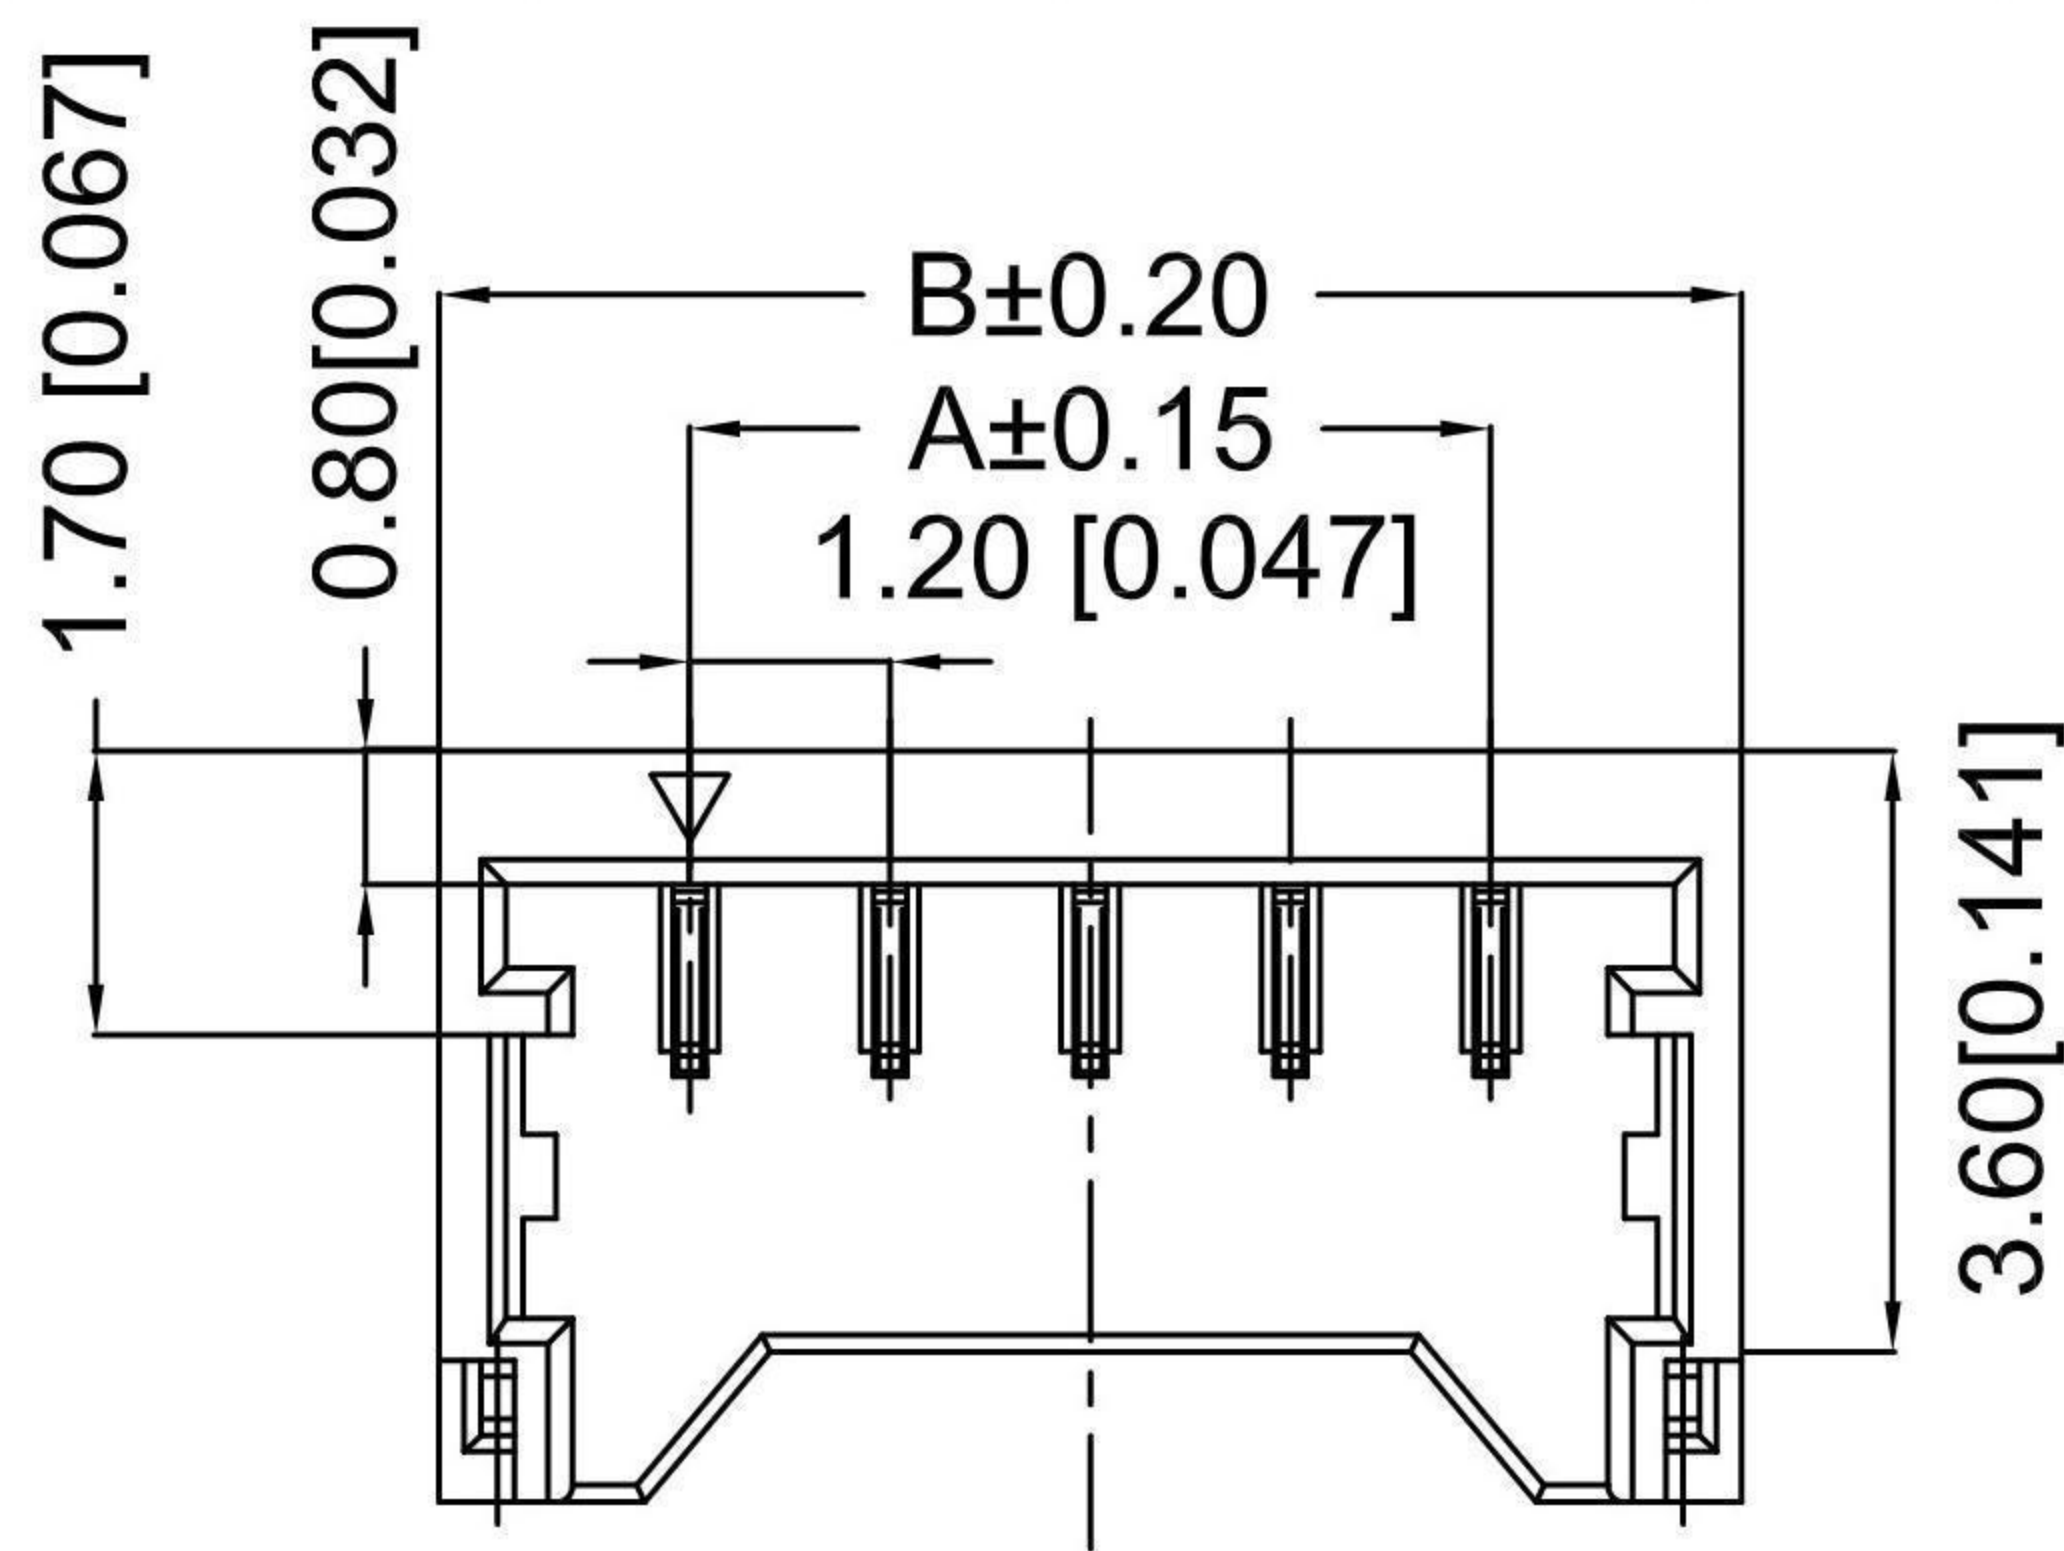

P.C.B LAYOUT
(TOP VIEW)

Specifications :


- Voltage rating: 50 V AC / DC
- Current rating: 1.5A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥100MΩ
- Contact resistance:≤20mΩ


X1224 W R S- XX-LP V01
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category:W-WAFER
- ③ Wedding Board Angle : R-Right 90°
- ④ Welding Way:S-SMT
- ⑤ Row No.Pin No.:XX-04P~07P
- ⑥ Material:LP-LCP 94V-0;4T-PA4T
- ⑦ Planting Category:V01-All Gold Flash

Poles	Dimensuons (mm)		
	A	B	C
02	1.20	4.20	2.65
03	2.40	5.40	3.85
04	3.60	6.60	5.05
05	4.80	7.80	6.25
06	6.00	9.00	7.45
07	7.20	10.20	8.65
08	8.40	11.40	9.85
09	9.60	12.60	11.05
10	10.80	13.80	12.25

X1224WRS-XX-4TV01	PA4T UL 94V-0	Phosphor Bronze	Gold-Flash	X1224H
X1224WRS-XX-LPV01	LCP UL 94V-0	Phosphor Bronze	Gold-Flash	
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitable Terminal

							DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

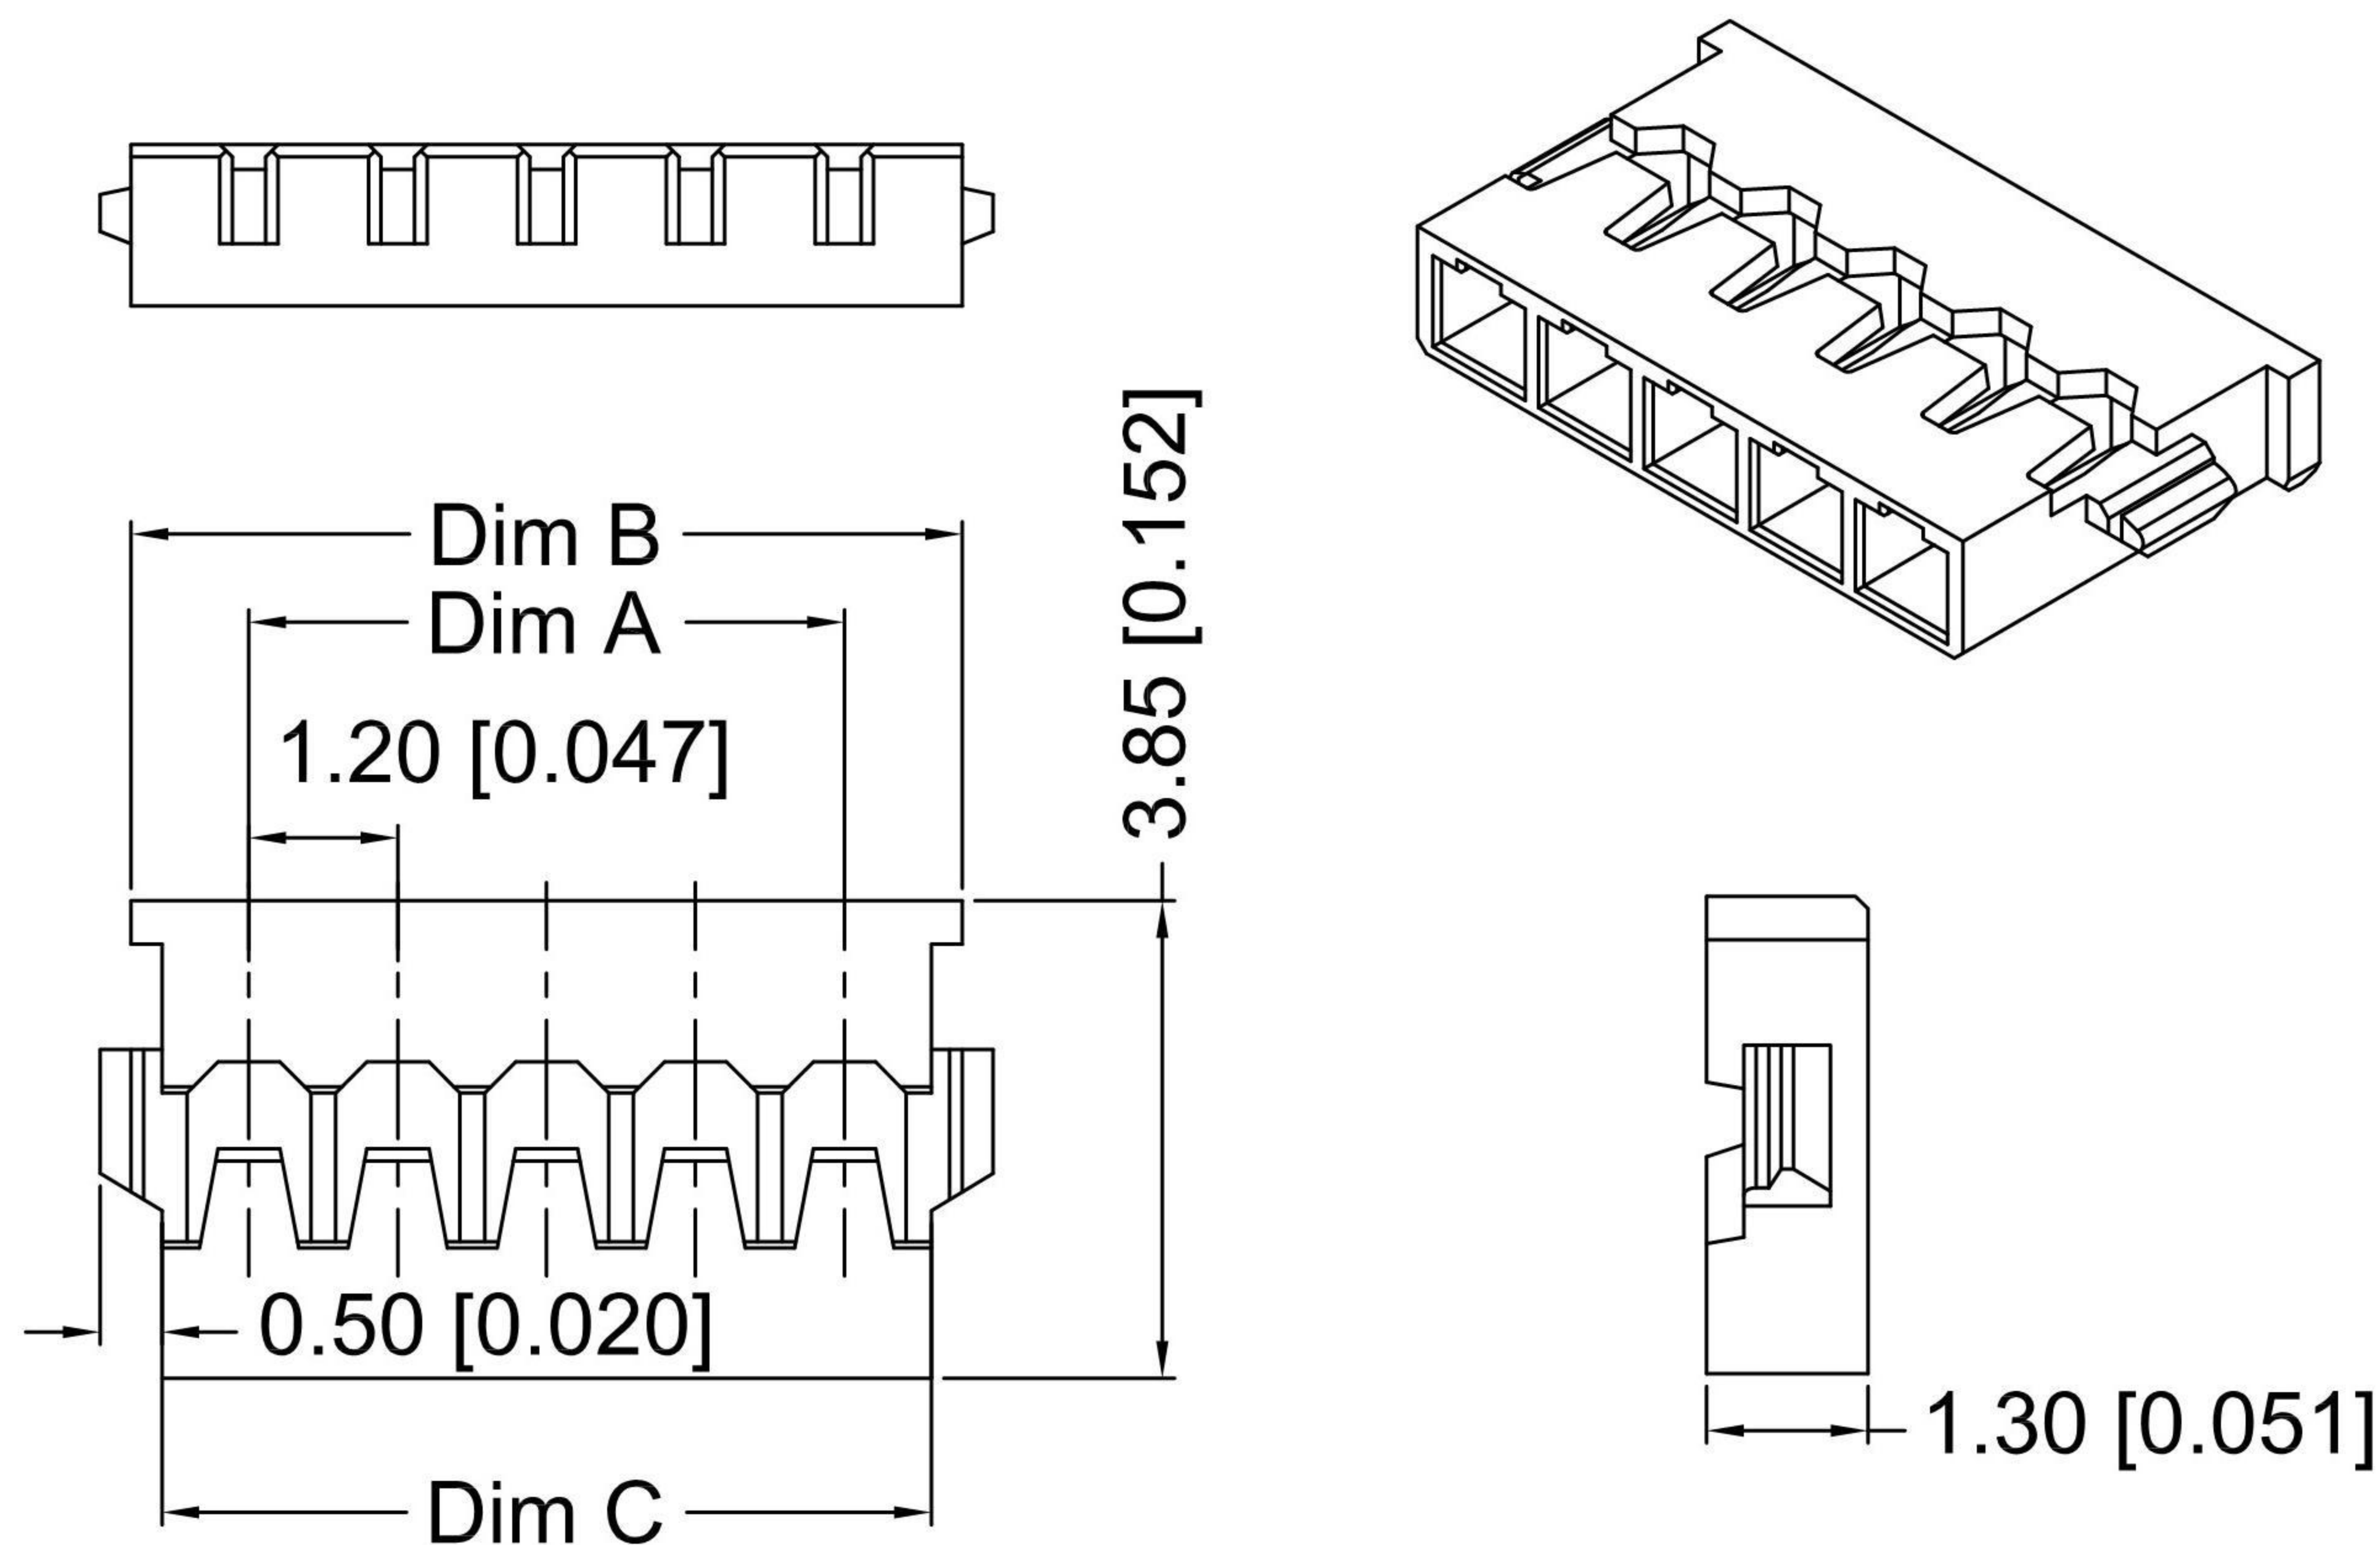

Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1.5A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Contact resistance:≤20mΩ
- Insulation resistance:≥100MΩ
- After environmental testing:≤40mΩ

X1224H-XX-N0


① ② ③ ④

- ① Series No.
 ② Category: H-HSG
 ③ Row No.Pin No.XX-02P-10P
 ④ Material:N0-PA66 94V-0

Poles	Dimensions(mm)		
	A	C	B
2	1.20	2.60	3.10
3	2.40	3.80	4.30
4	3.60	5.00	5.50
5	4.80	6.20	6.70
6	6.00	7.40	7.90
7	7.20	8.60	9.10
8	8.40	9.80	10.30
9	9.60	11.00	11.50
10	10.80	12.20	12.70

X1224H-XX-N0	N0-PA66 94V-0	X1224T	X1224W
PART NO	Material	Suitable Terminal	Suitable Terminal

							DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED							
REVISIONS						UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0

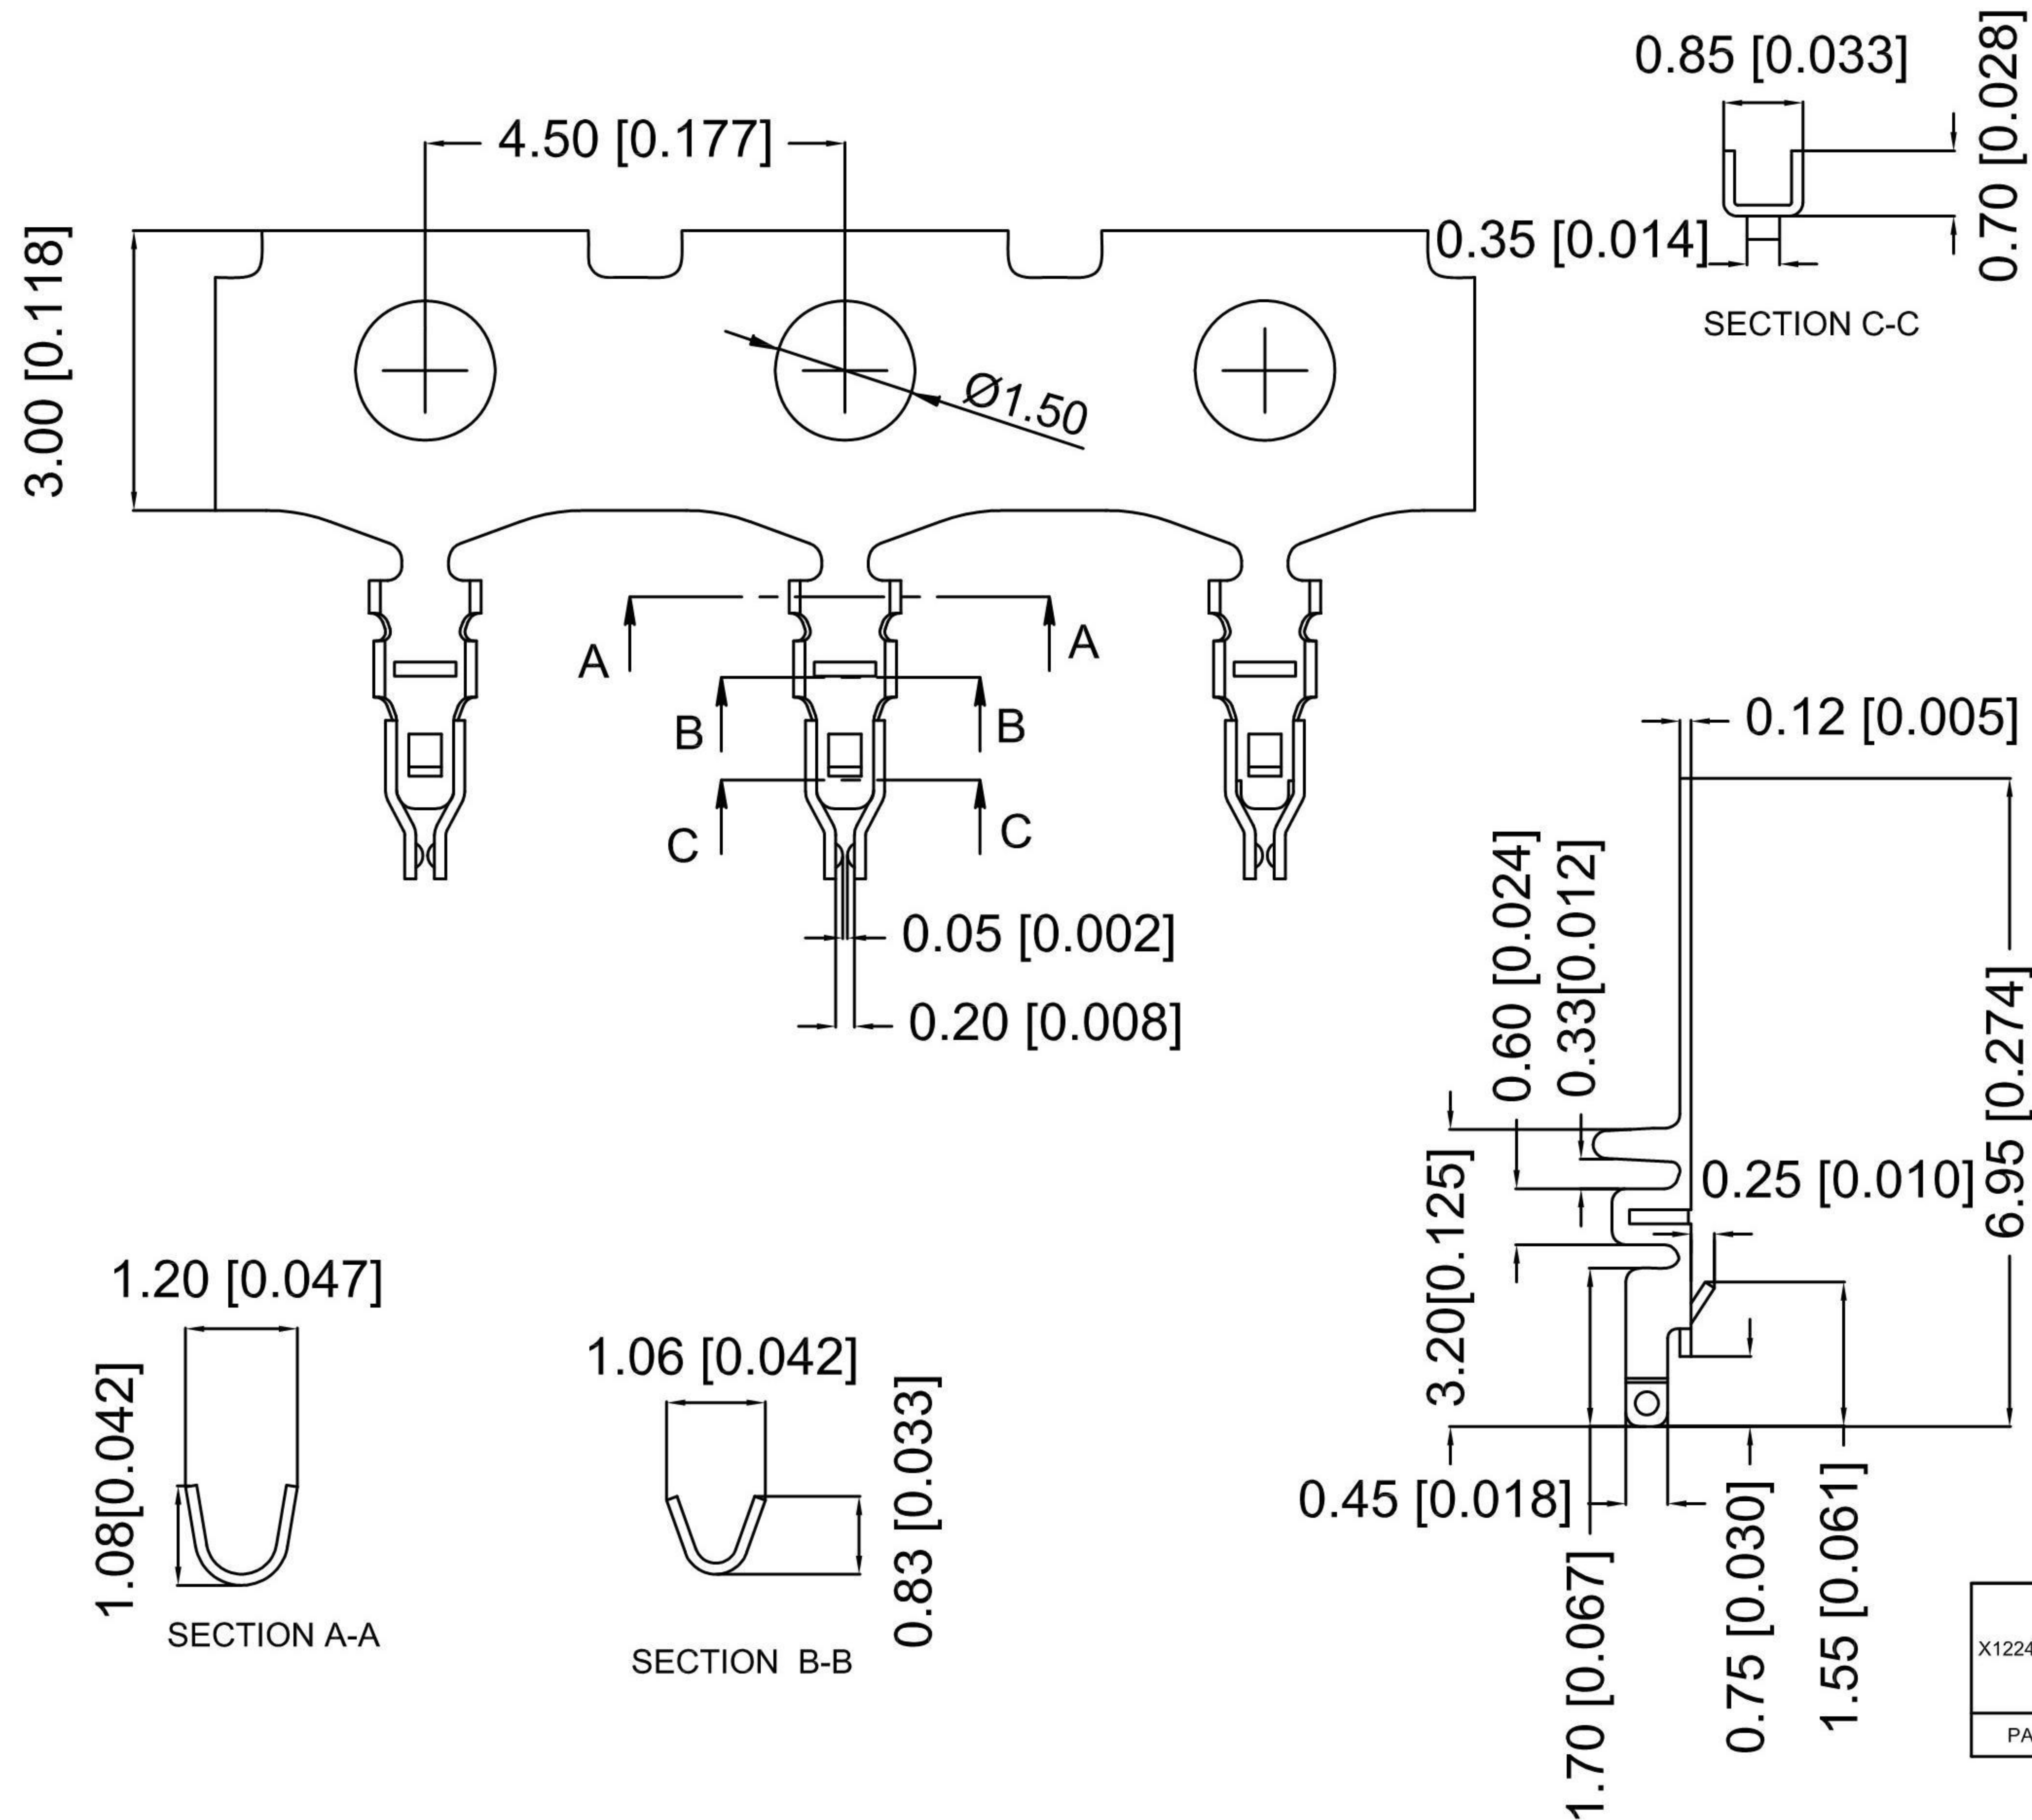

SPECIFICATIONS
Current Rating:1.5A AC,DC
Voltage Rating:50V AC,DC
Temperature Range:-25C~+85°C
Contact Resistance:20m2 Max.
Insulation Resistance: 100MD Min.
Withstanding Voltage:500V AC/minute
Material:Phosphor Bronze

X1224 T- P V01
① ② ③ ④

- ① Series No.
- ② Category : T-terminal
- ③ Material:P-Phosphor bronze
- ④ Plating Style:
V01-All Gold Flash

X1224T-PV01	Phospho Bronze	AWG#28-30	0.70mm	Stamping Before Pating:30u" Ni;Whole Gold:Gold Flash	X1224H
PART No	Material	Wire Range	Insulation O.D.	Finish	Suitable Terminal

							DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
				DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0