

P.C.B LAYOUT

Specifications:

规格:
 Voltage rating:600V AC/DC
 额定电压: 600V AC/DC
 Current rating:9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage:1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range:-25°C~+85°C
 温度范围: -25°C~+85°C
 Insulation resistance:≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance:≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing:≤20mΩ
 环境测试后: ≤20兆欧





X9357 W V X-XX X-XX SN XX
 01 02 03 04 05 06 08 09

- 01 Series No.
- 02 Category:W-wafer
- 03 Welding Board Angle: V-180°
- 04 Welding Way: Blank-DIP;
- 05 Row No.-Pin No.: XX-Single row
- 06 Special NO.HF-Halogen free
Material:NO-PA66 94V-0;
N2-PA66 94V-2
- 08 Planting Category:
V01:All Gold Flash;
SN-Bright tin plating
- 09 Color:Blank-natural color ;
BK-Black

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

PART NO	Material	Material(Pin)	Finish(Pin)	Suitable Terminal
X9357WV-XXHF-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X9357H
X9357WV-XX-N0V01	Nylon 66 UL 94V-0		Gold -Flash	
X9357WV-XX-N0SN	Nylon 66 UL 94V-0		Tin-Plated	
X9357WV-XX-N2V01	Nylon 66 UL 94V-2		Gold -Flash	
X9357WV-XX-N2SN	Nylon 66 UL 94V-2		Tin-Plated	

REVISIONS				UNSPECIFIED TOLERANCES		DSND	SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DATE	REVISED	APPROVED	ANGLAR	±5°		DWN	VIEW: ④	PART NO.:		
			L ≤ 4	±0.2		CHKD	UNIT: mm/in	DWG NO.:		
			4 < L ≤ 16	±0.3		APPD	SIZE: A4			
			16 < L ≤ 63	±0.4	DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
			L > 63	±0.5					1/1	A0

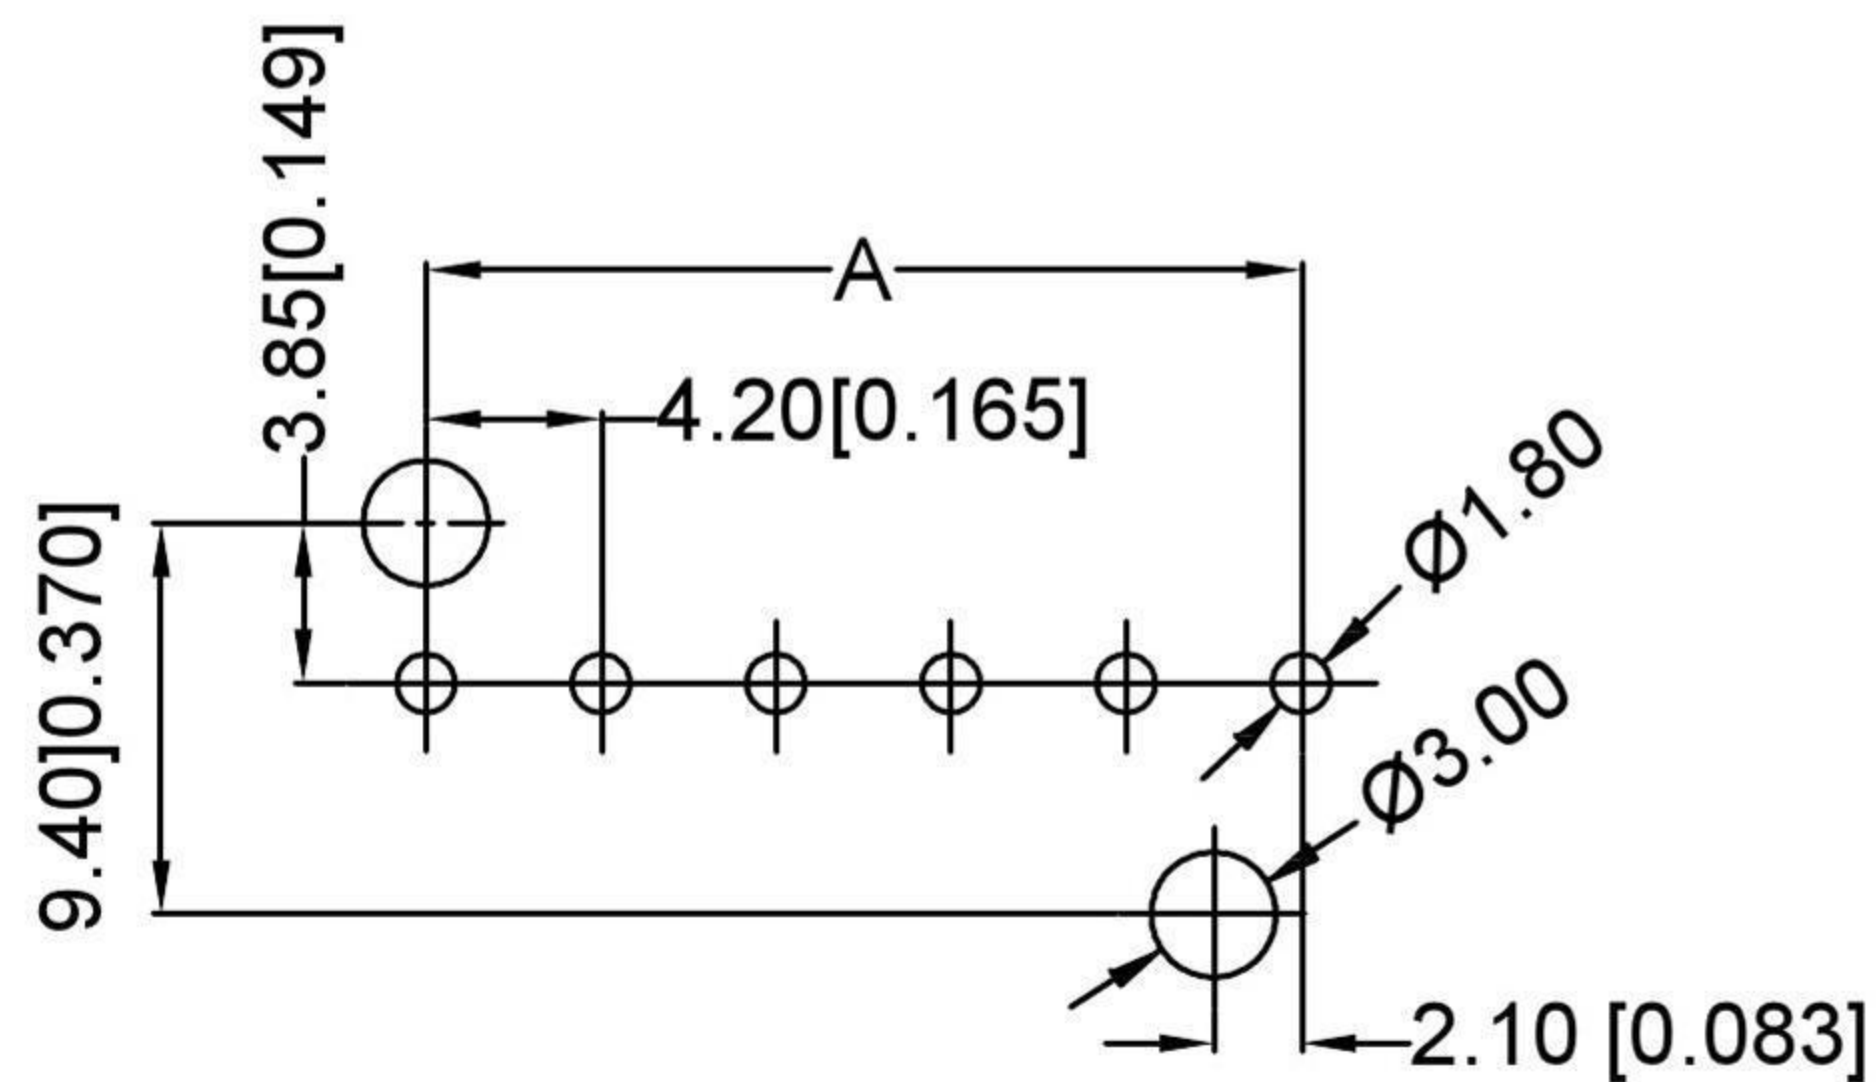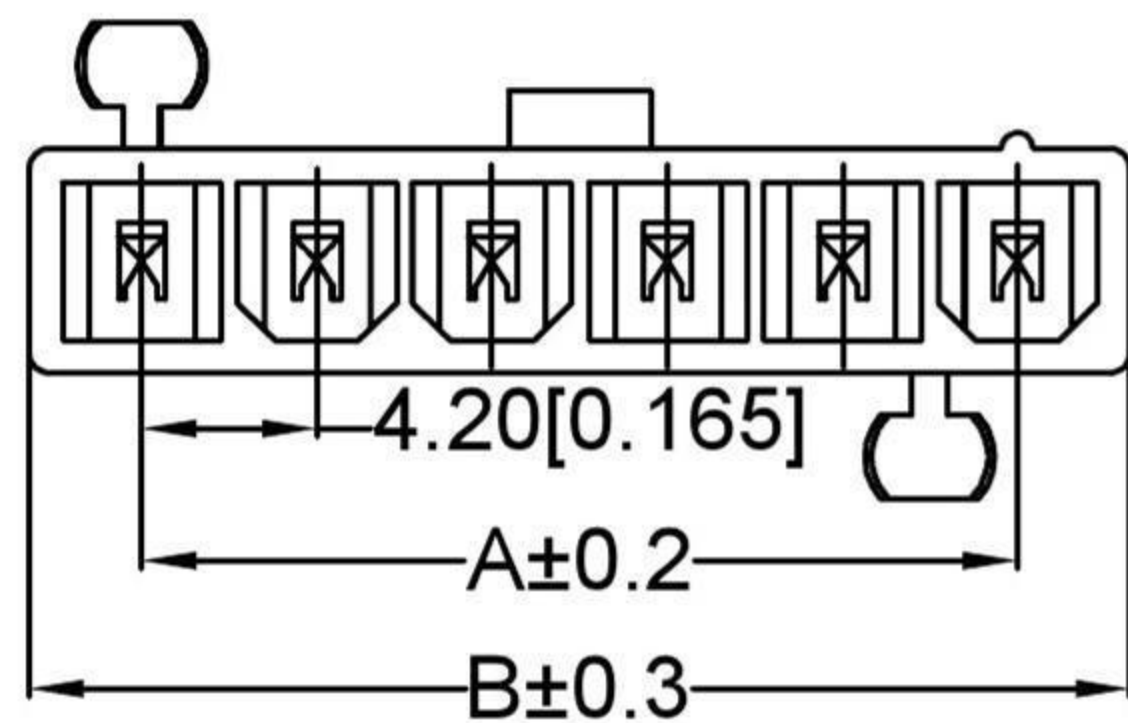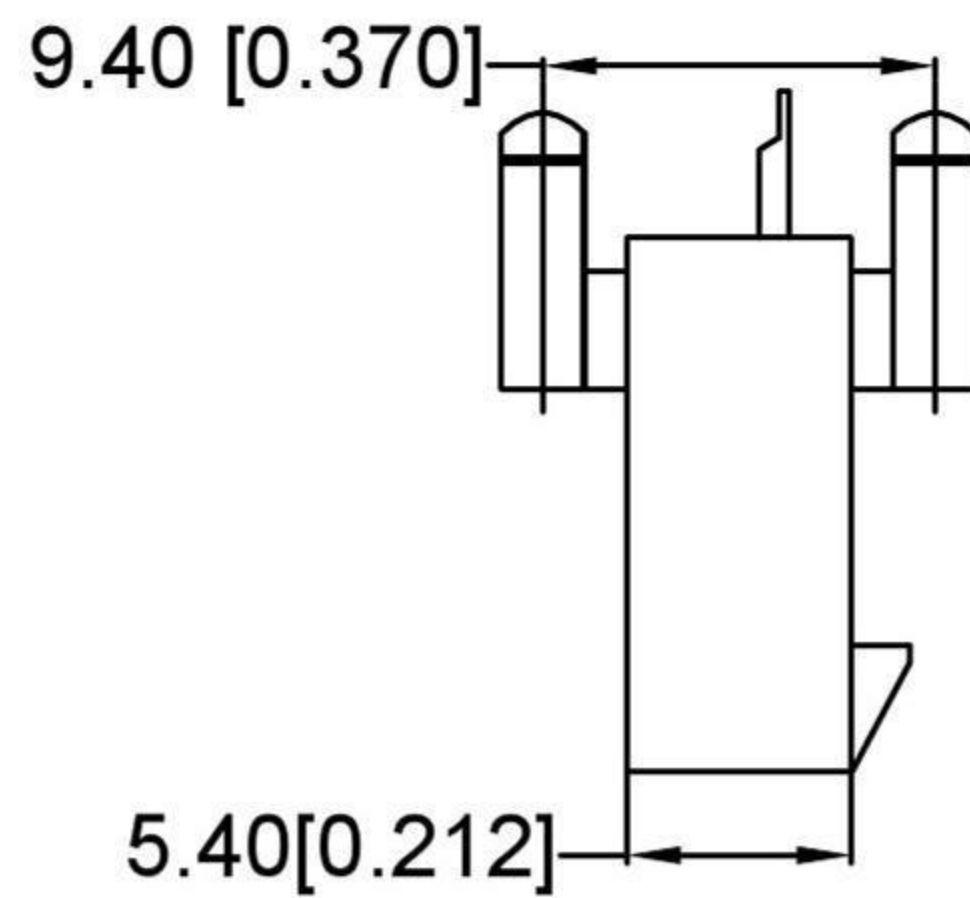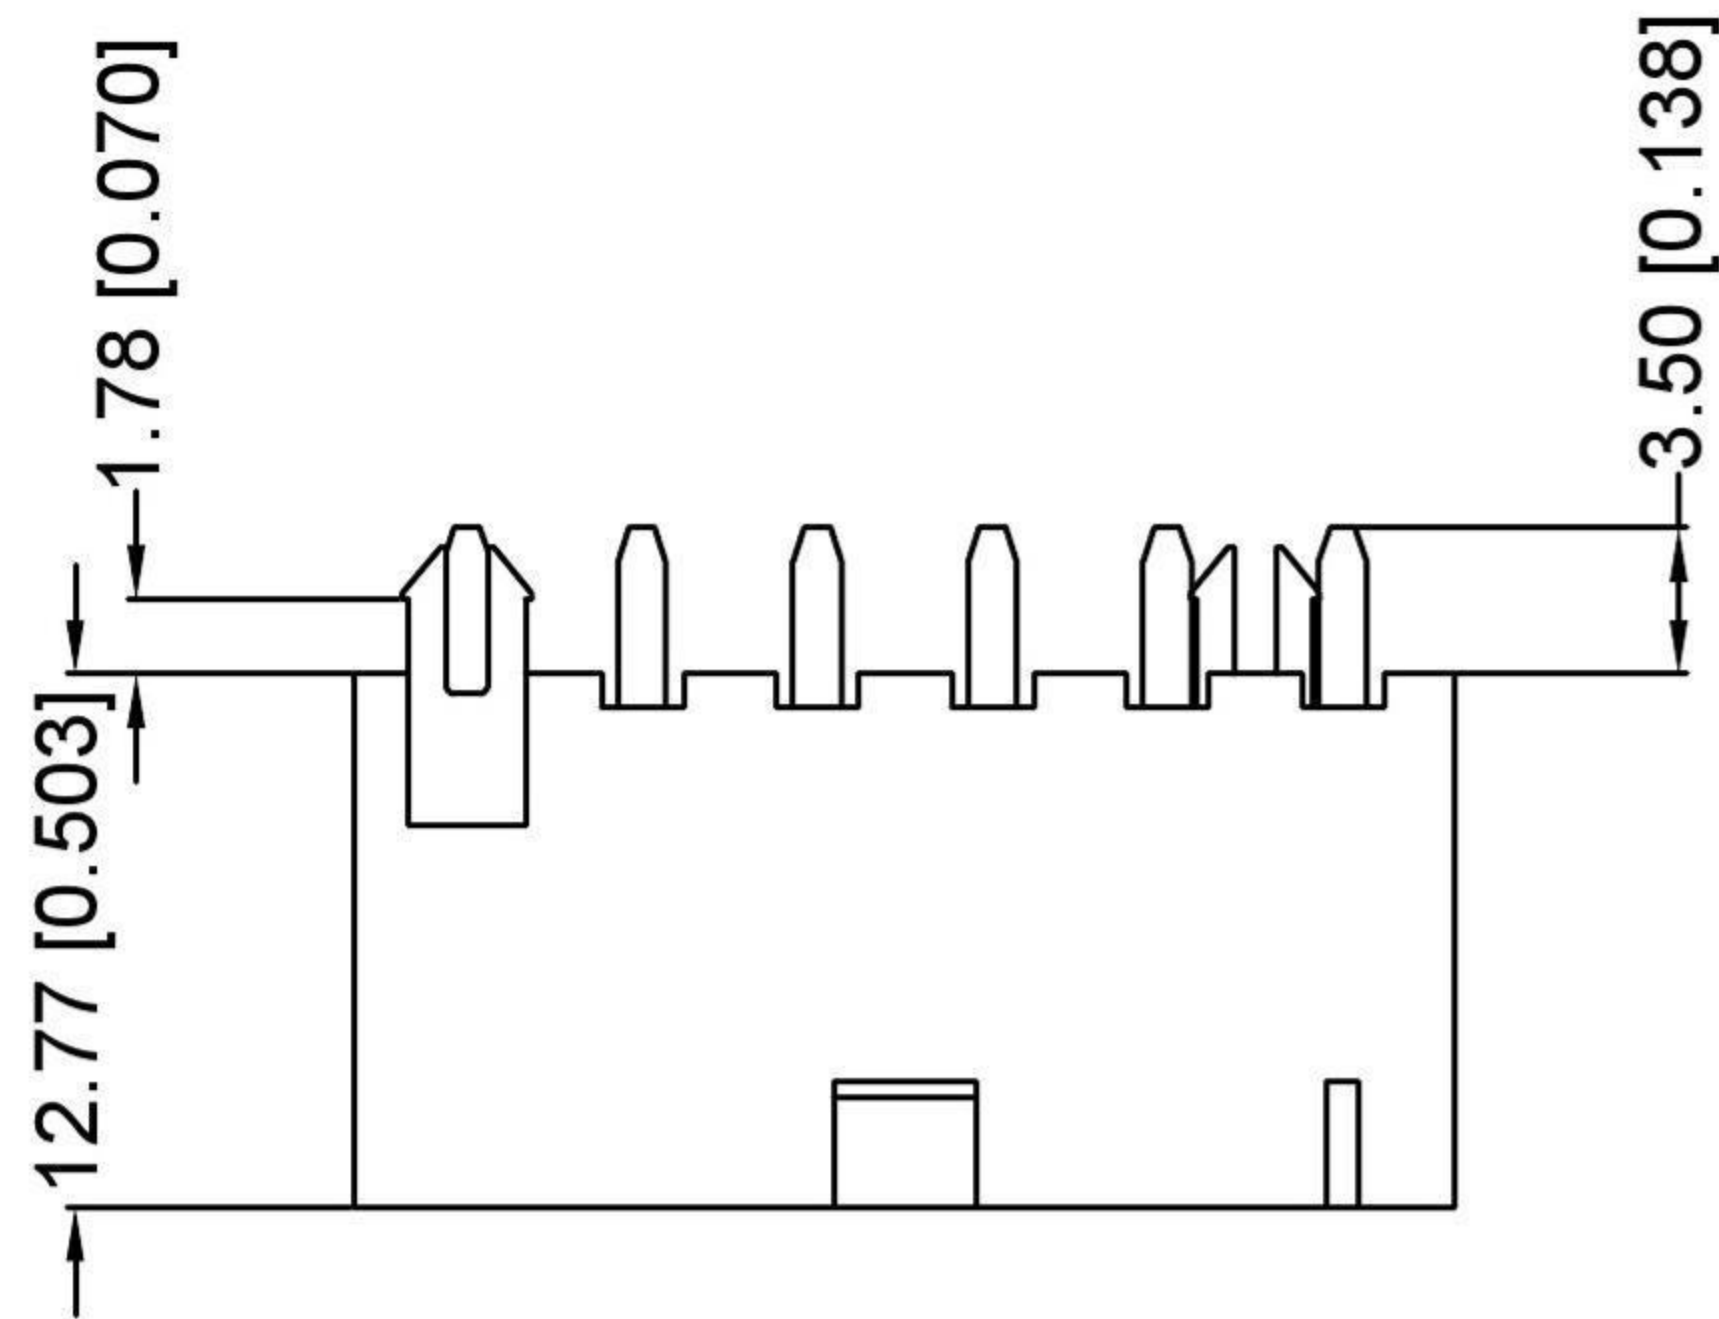


Recommended P.C.B Layout
General Tolerance ±0.05

Specifications:

规格:
Voltage rating: 600V AC/DC
额定电压: 600V AC/DC
Current rating: 9A AC/DC
额定电流: 9A AC/DC
Withstanding voltage: 1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range: -25°C~+85°C
温度范围: -25°C~+85°C
Insulation resistance: ≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance: ≤10mΩ
接触电阻: ≤10mΩ
After environmental testing: ≤20mΩ
环境测试后: ≤20兆欧


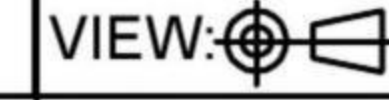
X9357 W V X-XX FS-XX SN XX
01 02 03 04 05 06 07 08 09




- 01 Series No.
- 02 Category: W-wafer
- 03 Welding Board Angle: V-Straight 180°
- 04 Welding Way: Blank-DIP;
- 05 Row No.-Pin No
XX-02P-06P
- 06 Plug the Pin&Special No:
FS-The hollow needle with positioning column
- 07 Material:
NO-PA66 94V-0:NO-PA66-94V-0
N2-PA66 94V-2
- 08 Plant Category: SN-Bright tin plating
- 09 Color : Blank-natural color

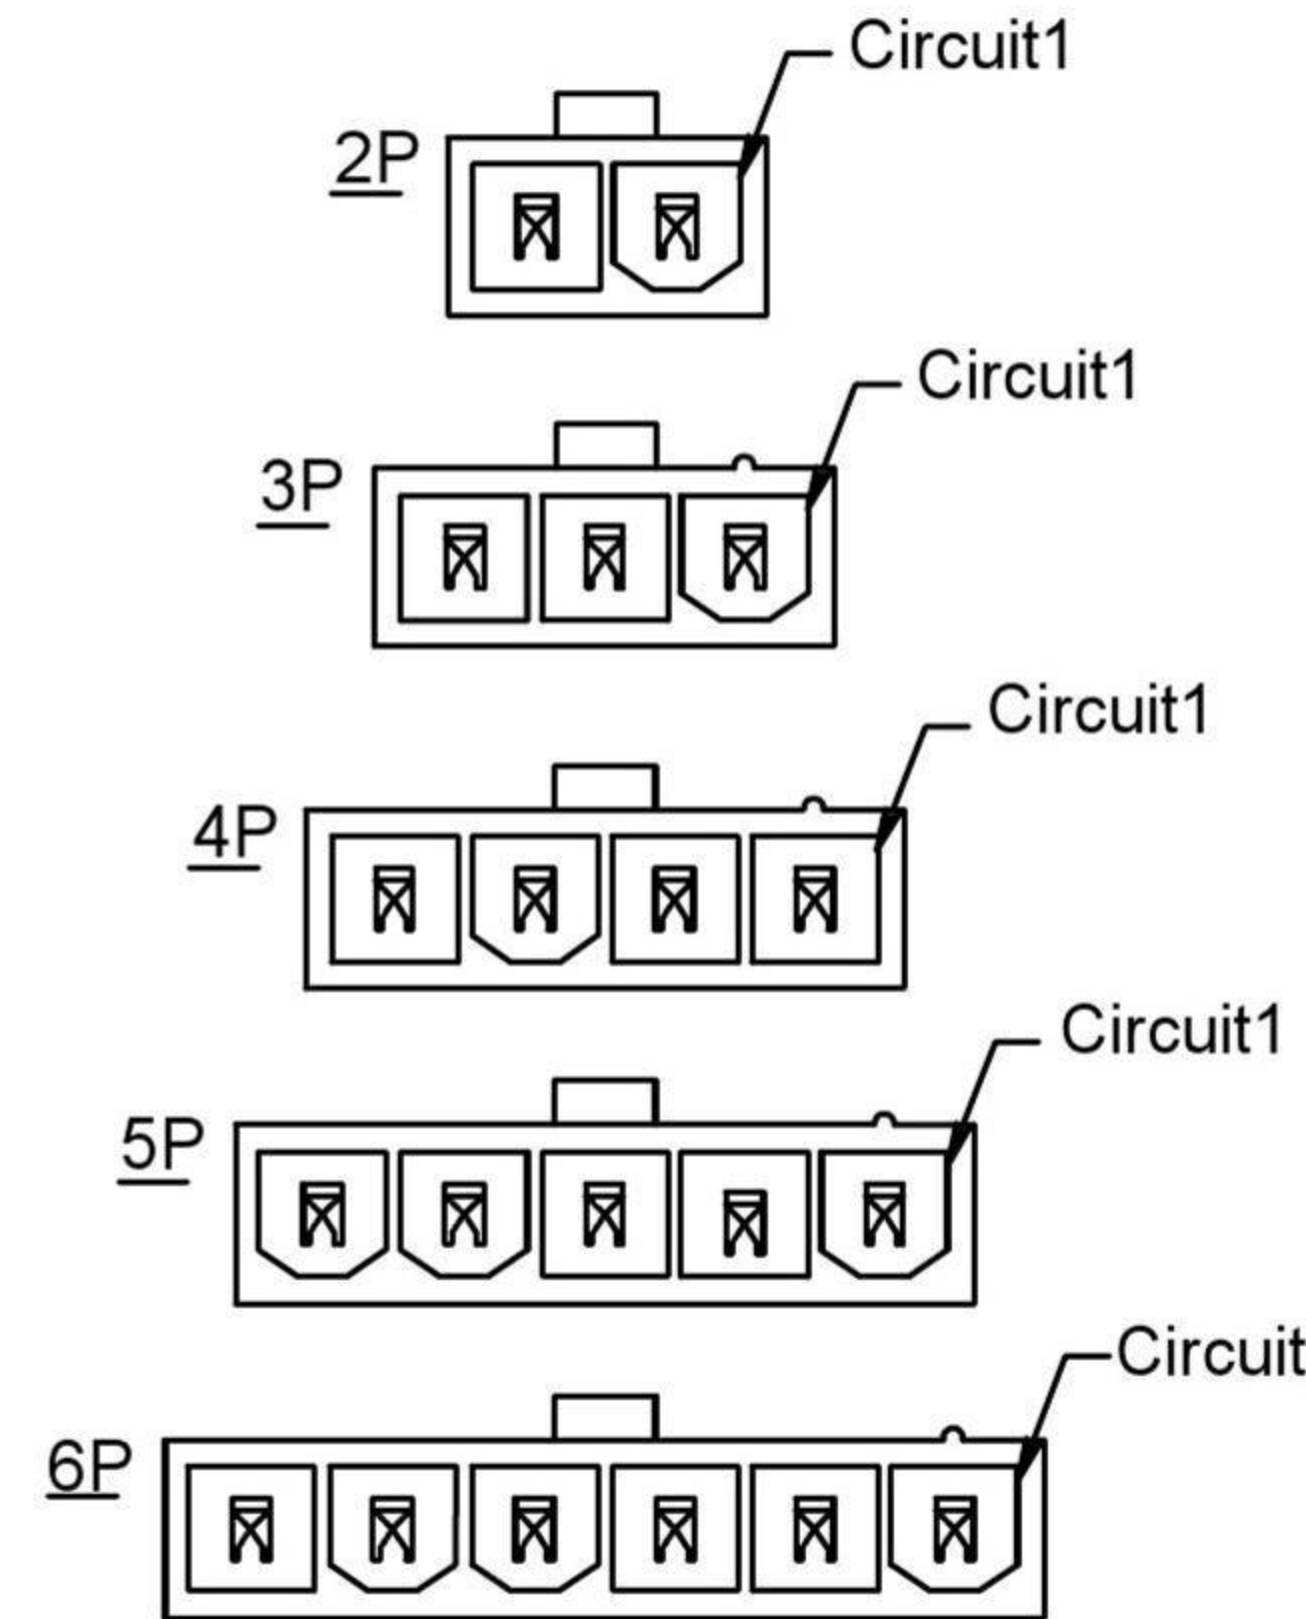



Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

X9357WV-XXFS-46SN	Nylon 46 UL 94V-0	Brass	Tin-Plated	X9357H	
X9357WV-XXFS-N0SN	Nylon 66 UL 94V-0				
X9357WV-XXFS-N2SN	Nylon 66 UL 94V-2				
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable	Terminal

REVISIONS				UNSPECIFIED TOLERANCES		DSND	SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DATE	REVISED	APPROVED				DWN	VIEW: 	PART NO.:		
						CHKD	UNIT: mm/in	DWG NO.:		
						APPD	SIZE: A4	WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com					DONG GUAN XI BANG ELECTRONIC CO., LTD			1/1	A0	

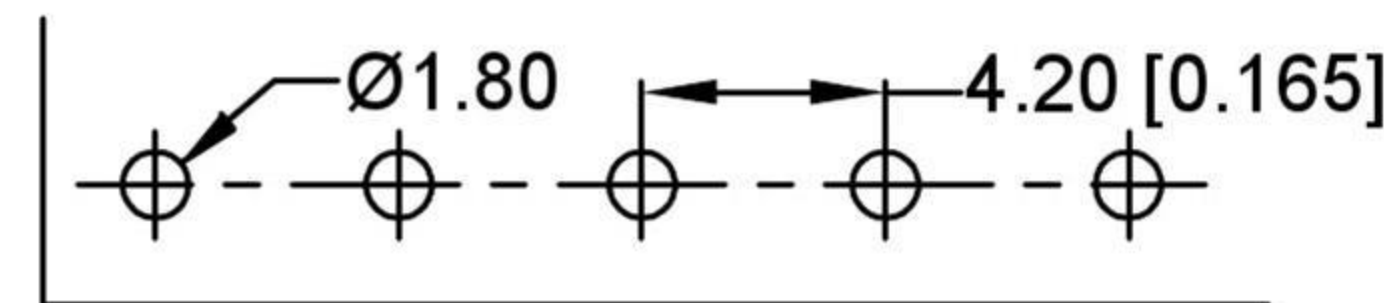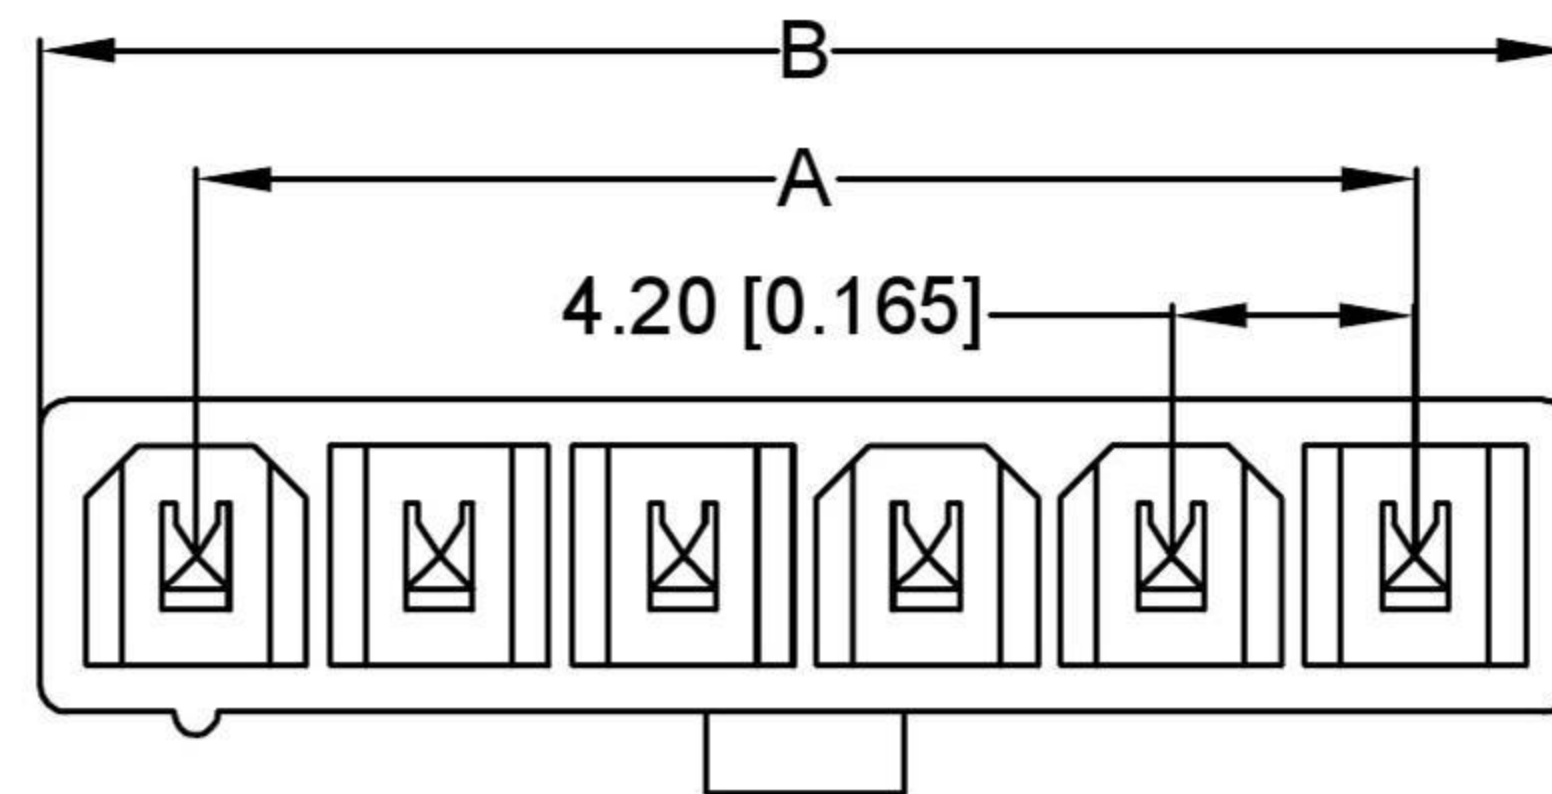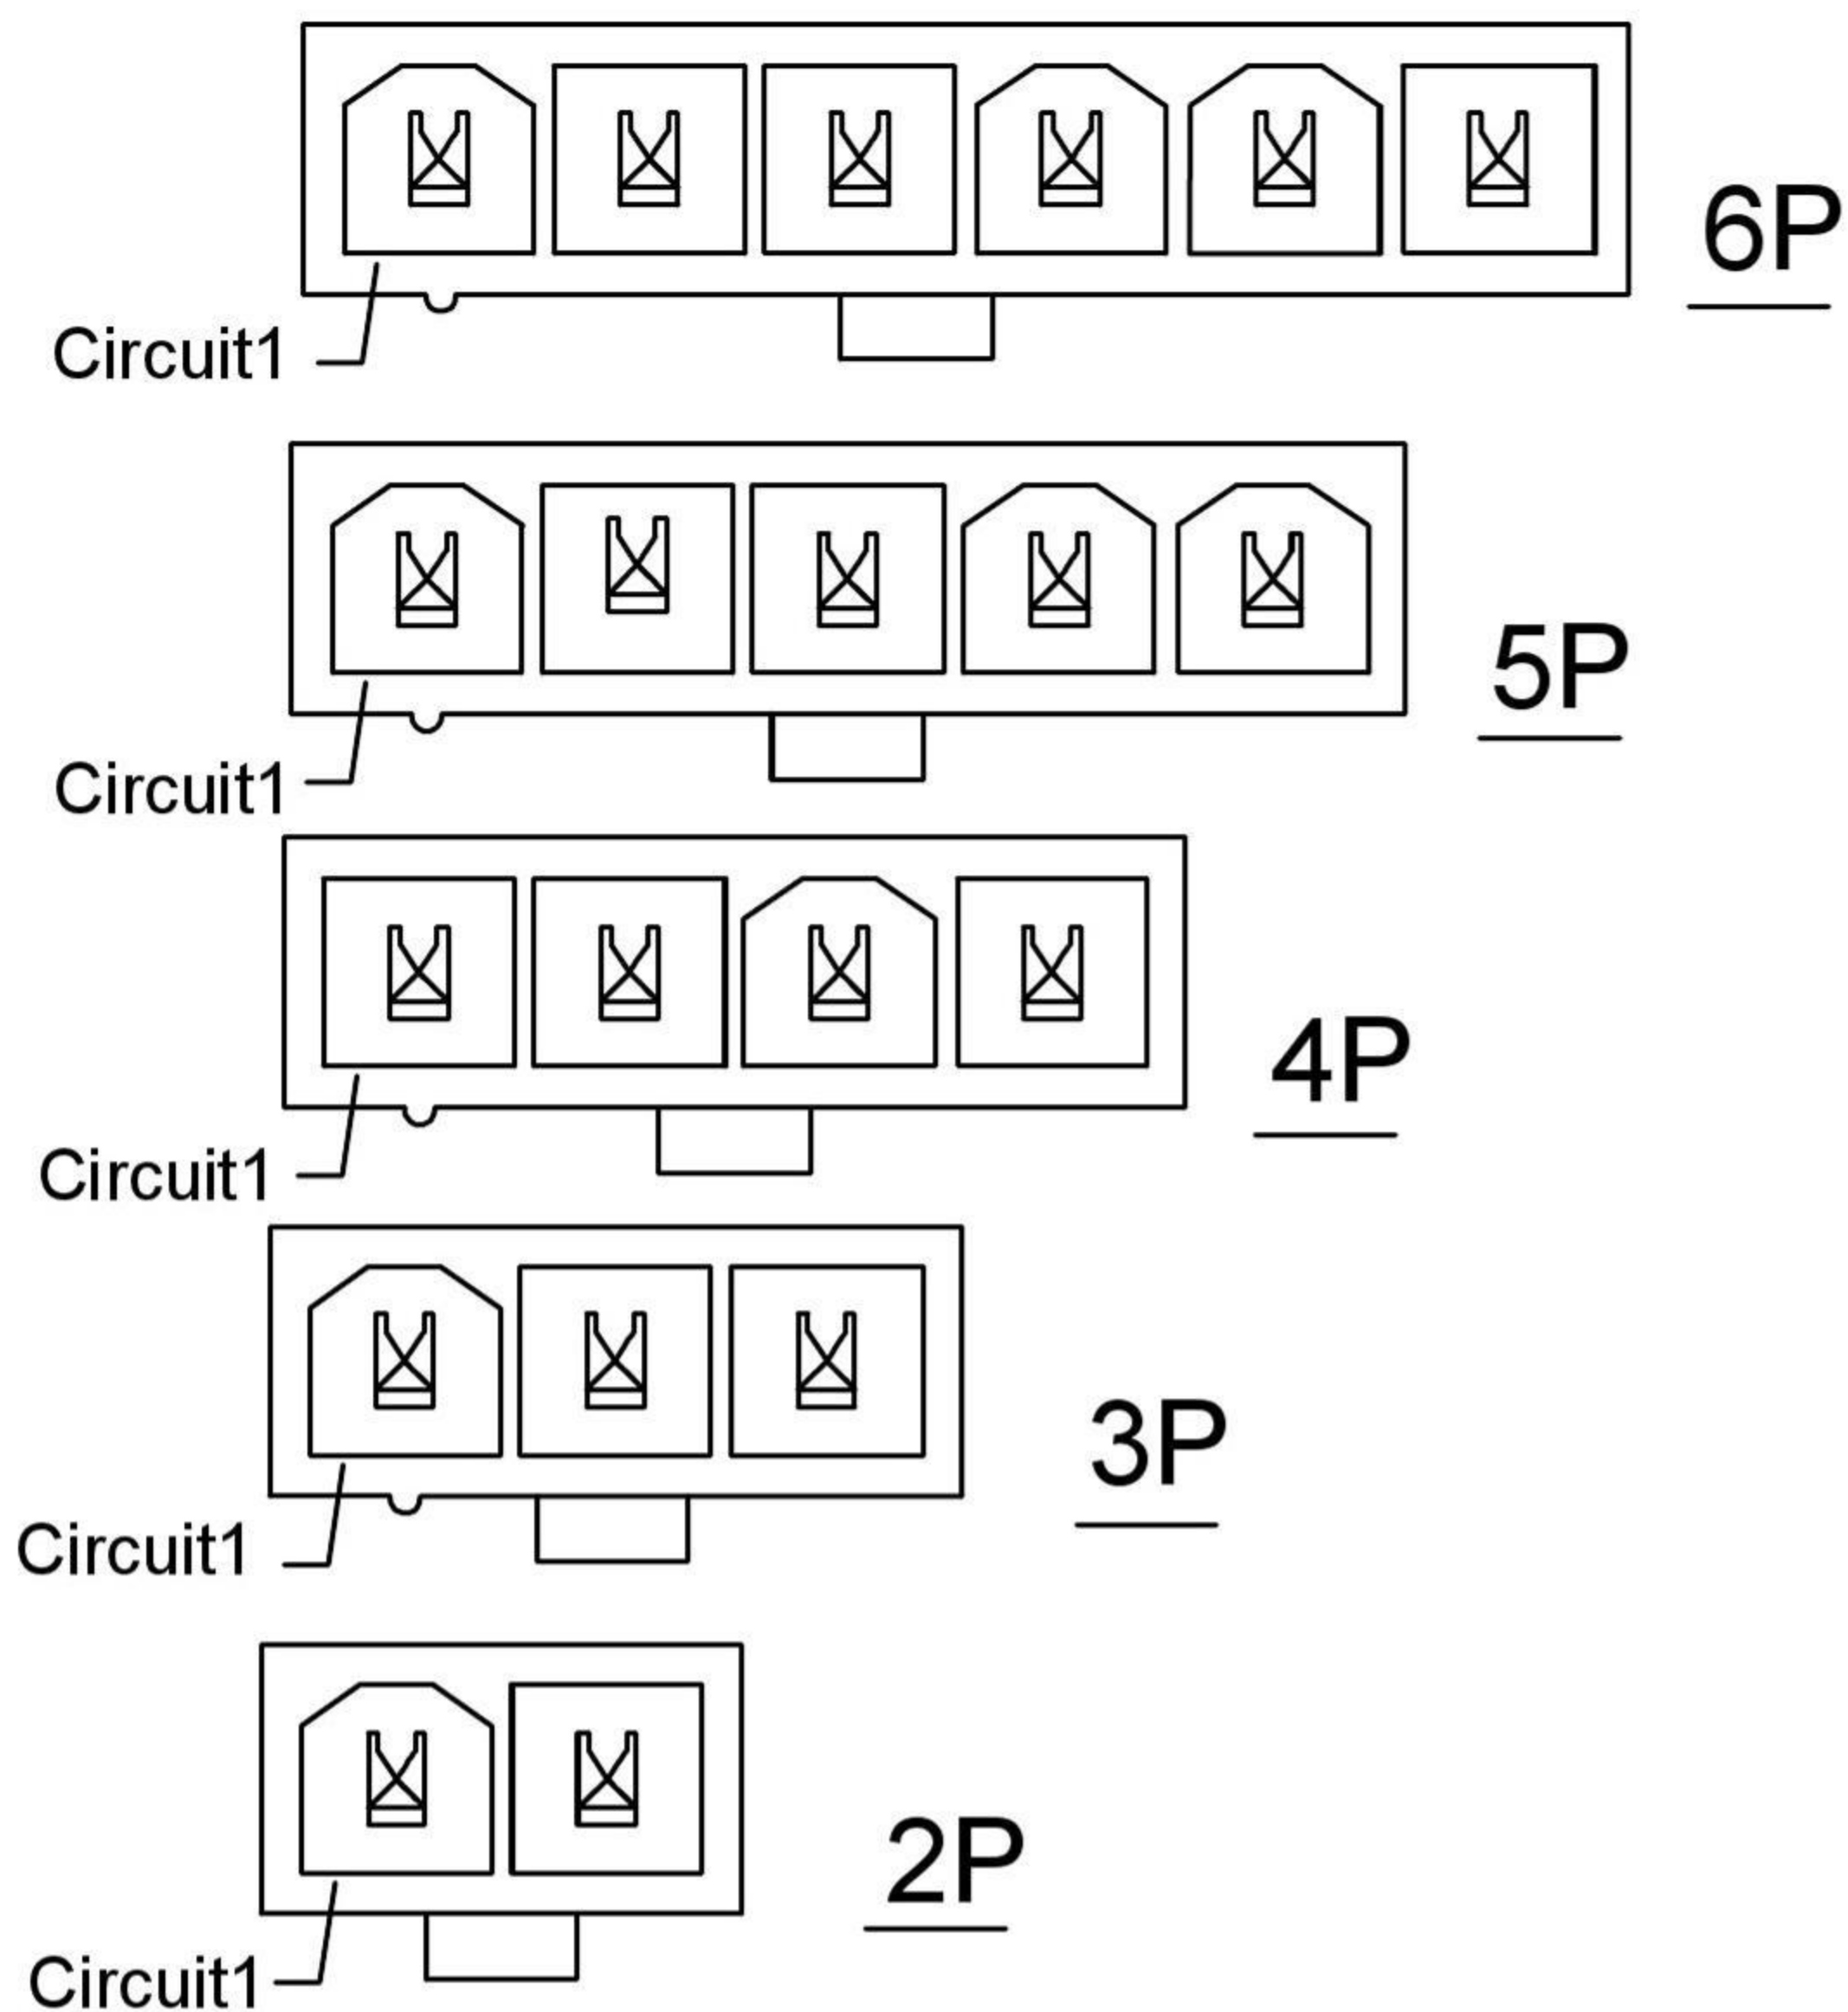

Recommened PCB Layout

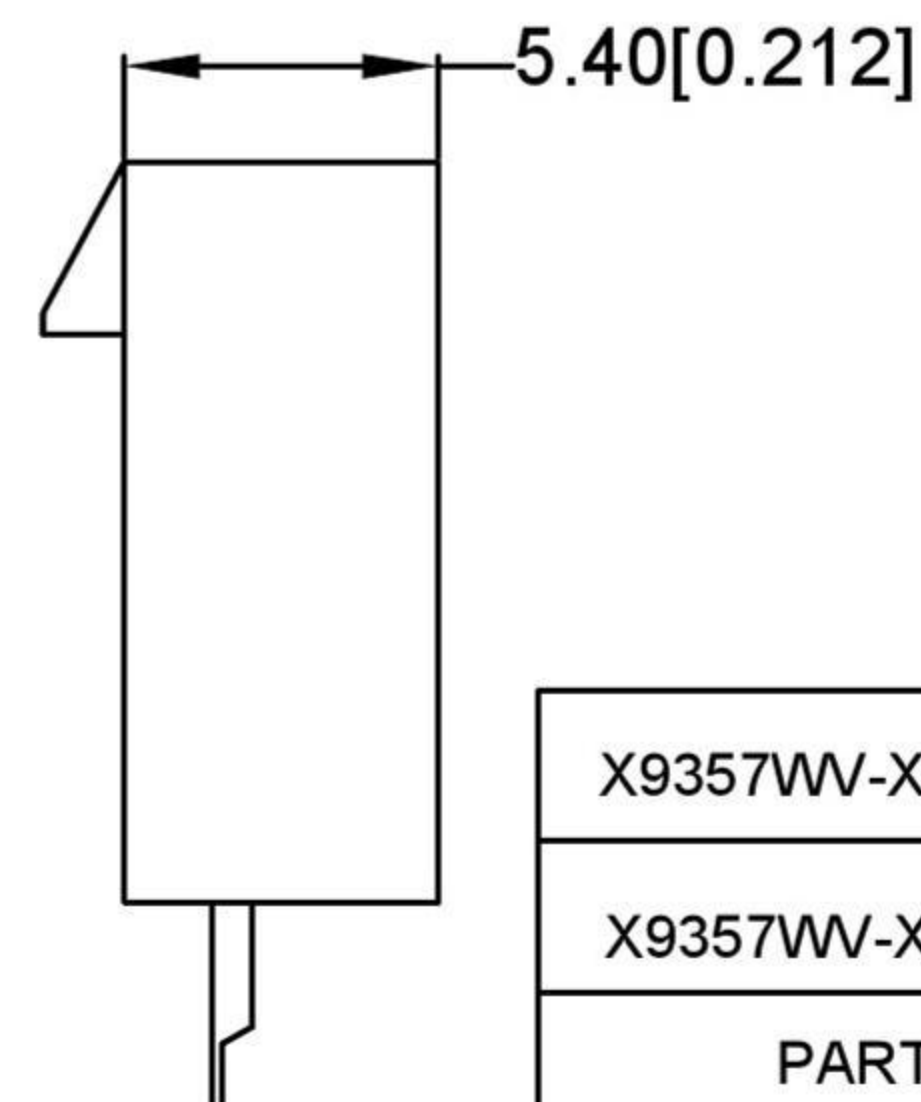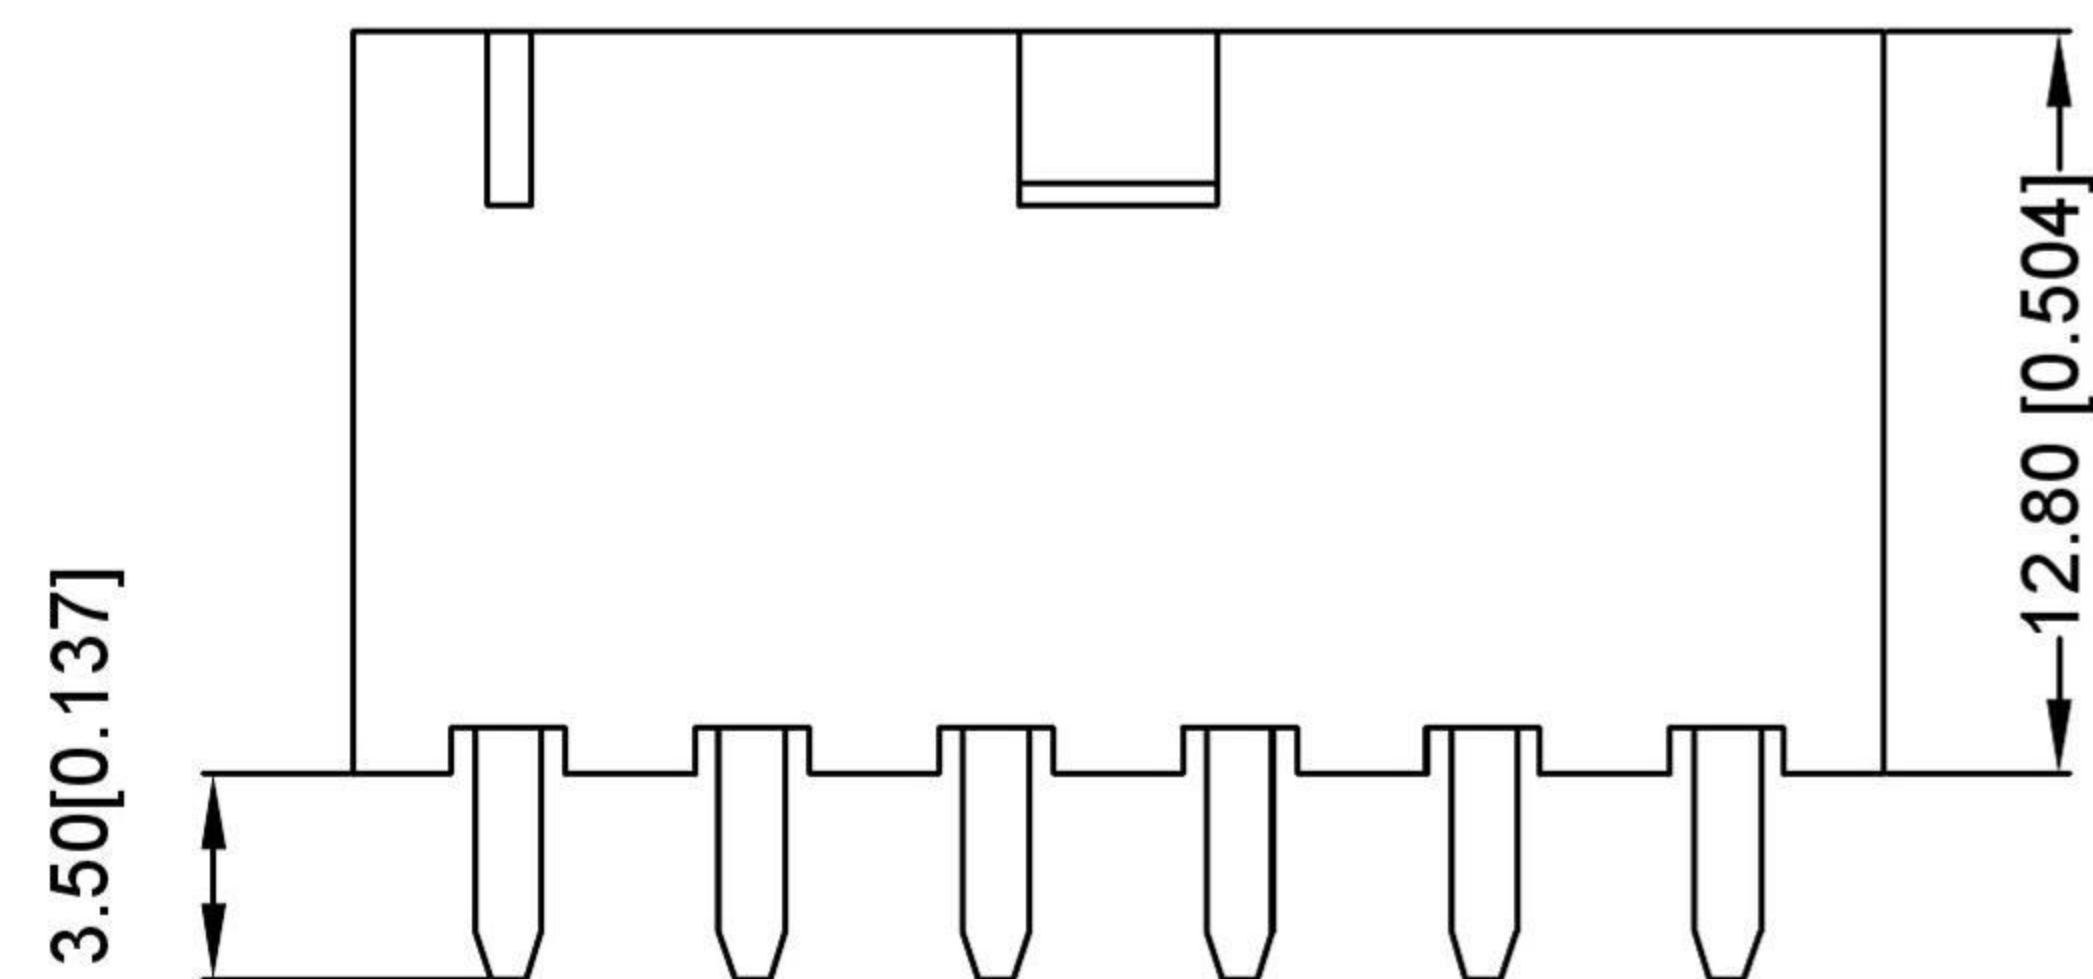

Specifications:

规格:
 Voltage rating:600V AC/DC
 额定电压: 600V AC/DC
 Current rating:9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage:1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range:-25℃-+85℃
 温度范围: -25℃-+85℃
 Insulation resistance:≥1000MΩ
 绝缘电阻: ≥100MΩ
 Contact resistance:≤10mΩ
 接触电阻: ≤10mΩ^{XKB}
 After environmental testing:≤20mΩ
 环境测试后: ≤20兆欧



X9357 W R X-XX HN-XX SN XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 01 Series No.
- 02 Category: W-wafer
- 03 Welding Board Angle: V-180°
- 04 Welding Way: Blank-DIP;
- 05 Row No.-Pin No
XX-Single row
- 06 Special NO.
HN-The hollow needke
- 07 Material:
NO-PA66 94V-0;N2-PA66 94V-2
- 08 Planting Category: V:Al Gold-Plated
G:Gold-Plated Contact
S-Silver Plating
*01-Gold Flash;*02-2u";*03-3u";*05-5u"10-10u
*15-15u";*30-30u";*50-50u"
- N-Plating Nickel 30-50u";SN-Bright tin plating 70u" SW-Fog Tin plating
- 09 Color:
Blank-natural color

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40




X9357WW-XXHN-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9357H
X9357WW-XXHN-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X9357H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable Terminal

REVISIONS				ANGULAR		XKB Switch Connector	DSND	SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR
DATE	REVISED	APPROVED	L ≤ 4	±5°	DWN				
			4 < L ≤ 16	±0.2	CHKD				
			16 < L ≤ 63	±0.3	APPD				
			L > 63	±0.4					
				UNSPECIFIED TOLERANCES				UNIT: mm/in	PART NO.:
						SIZE: A4		DWG NO.:	
						DONG GUAN XI BANG ELECTRONIC CO., LTD		WEIGHT	SHEET
								1/1	REVISION
									A0

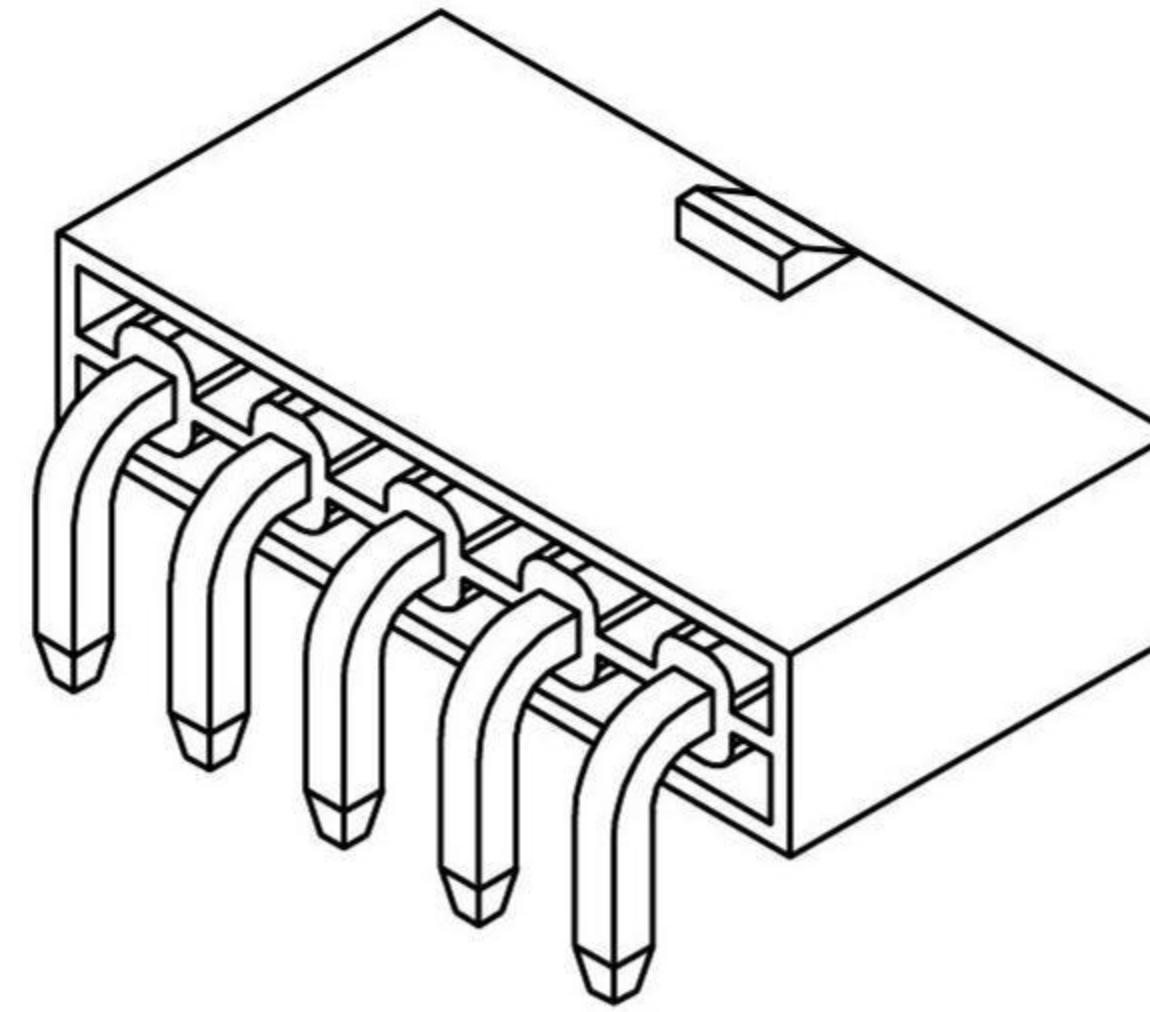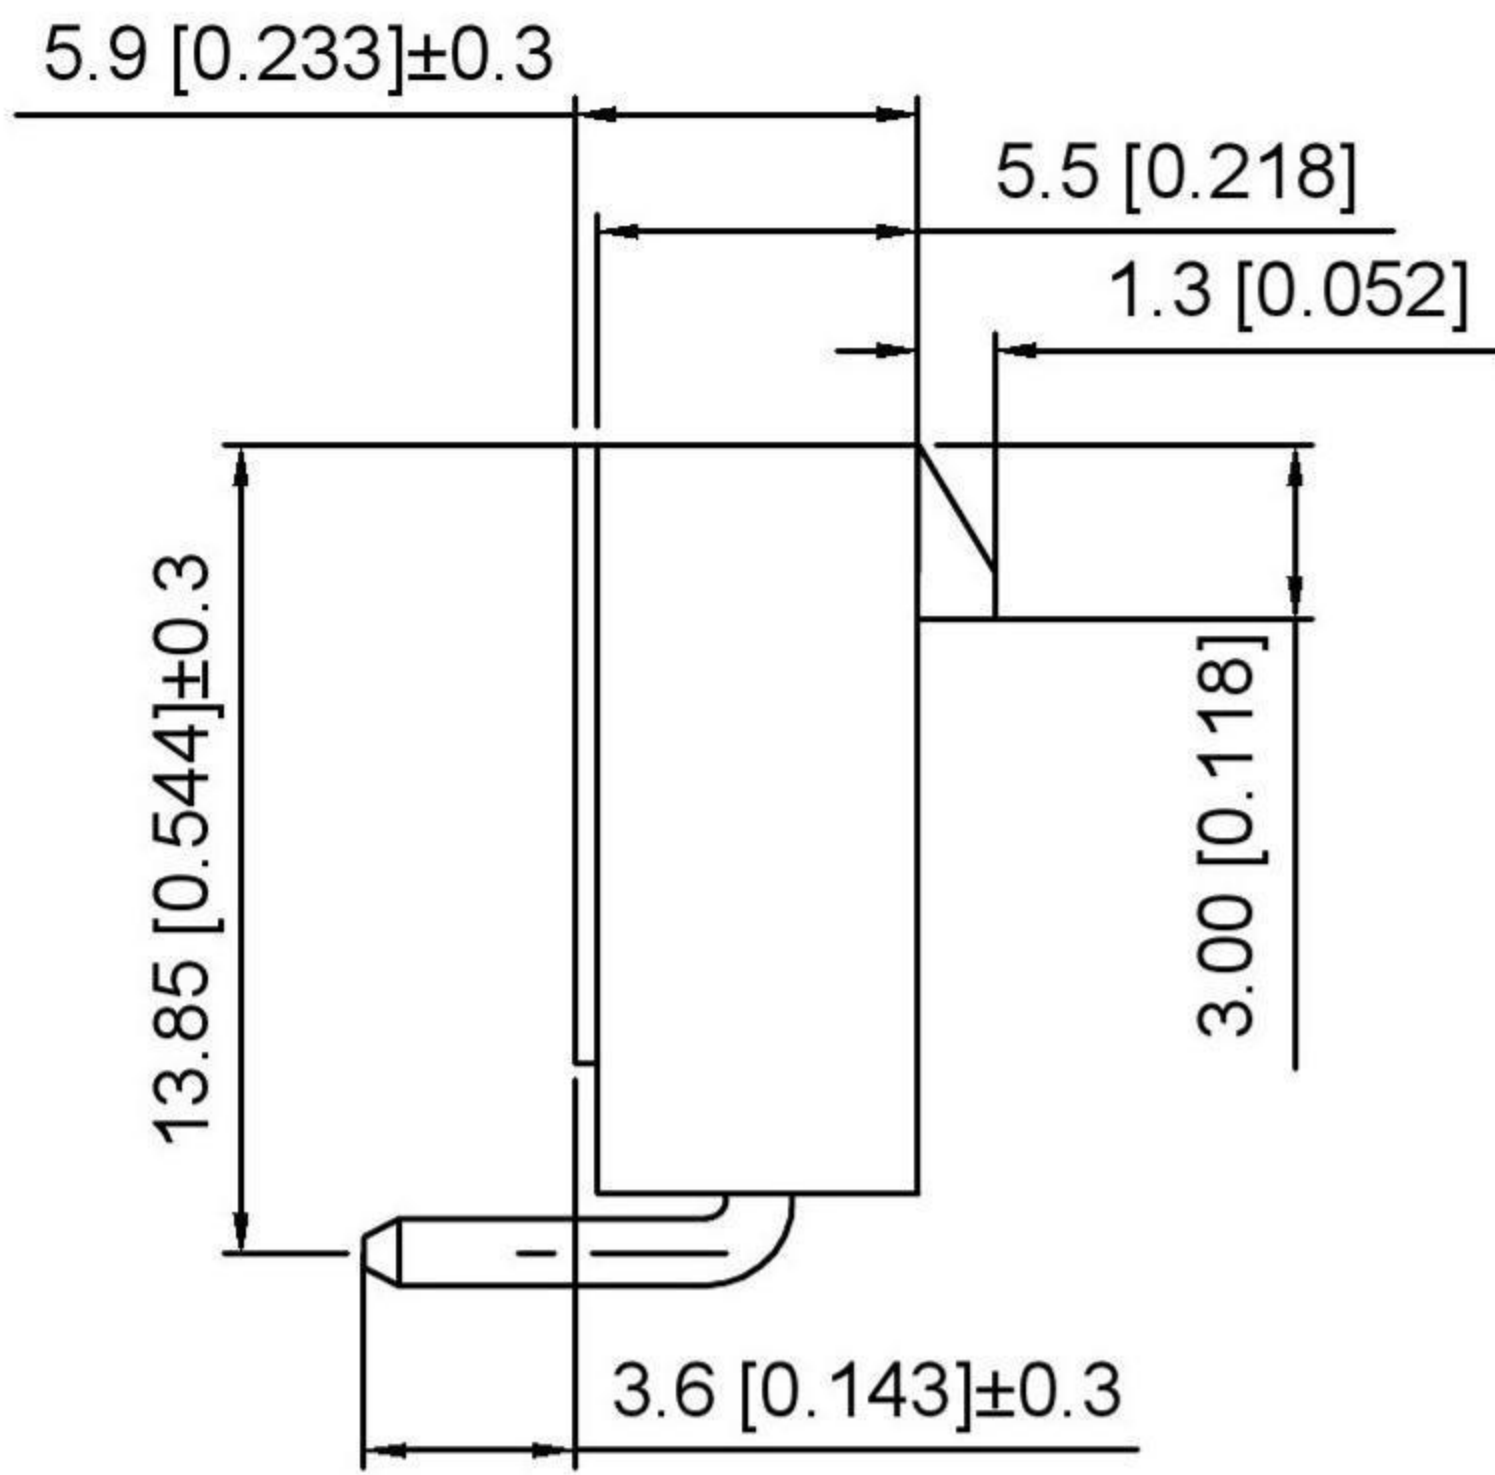


Specifications:

规格:
Voltage rating:600V AC/DC
 额定电压: 600V AC/DC
Current rating:7A AC/DC
 额定电流: 7A AC/DC
Withstanding voltage:1500V AC/minute
 耐受电压: 1500V AC/分钟
Temperature range:-25°C-+85°C
 温度范围: -25°C-+85°C
Insulation resistance:1000MΩ min
 绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
 接触电阻: 20mΩ Max

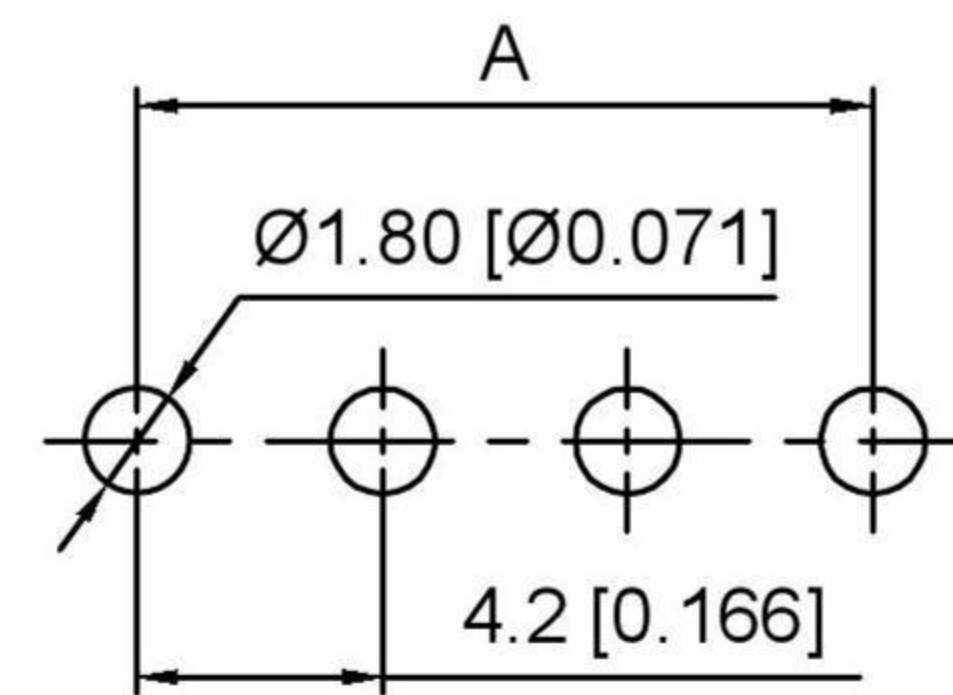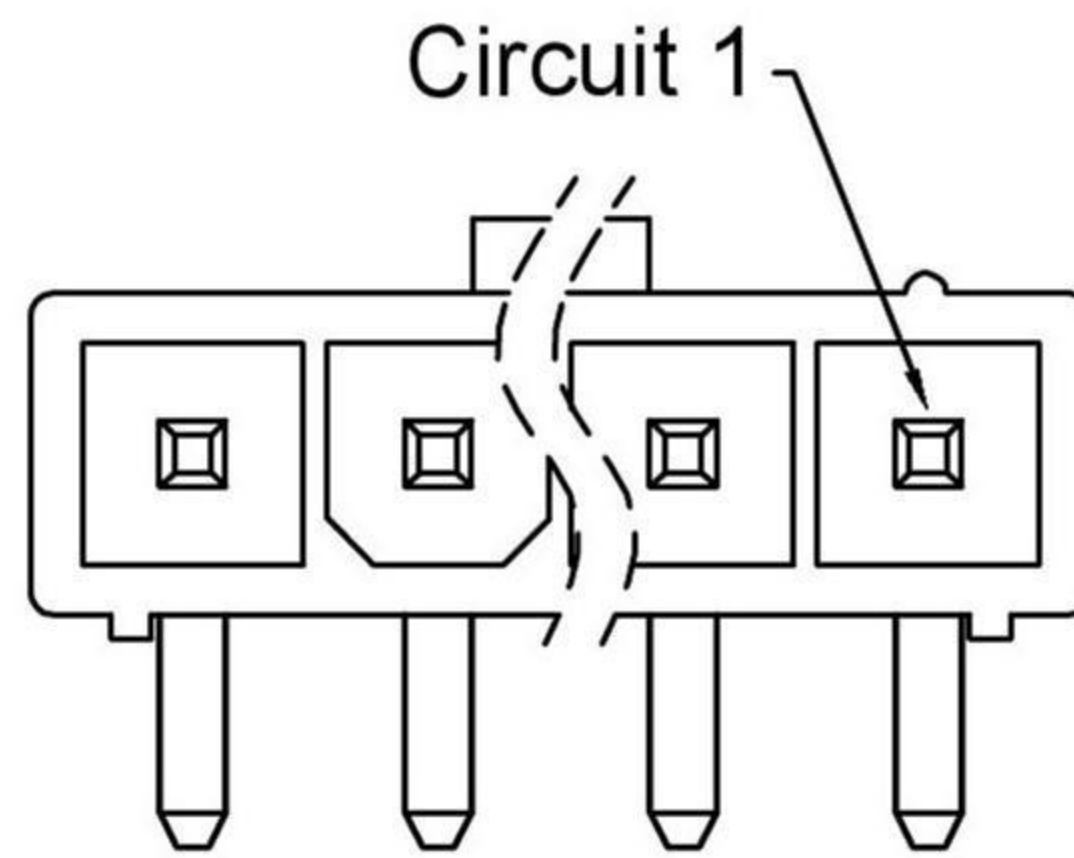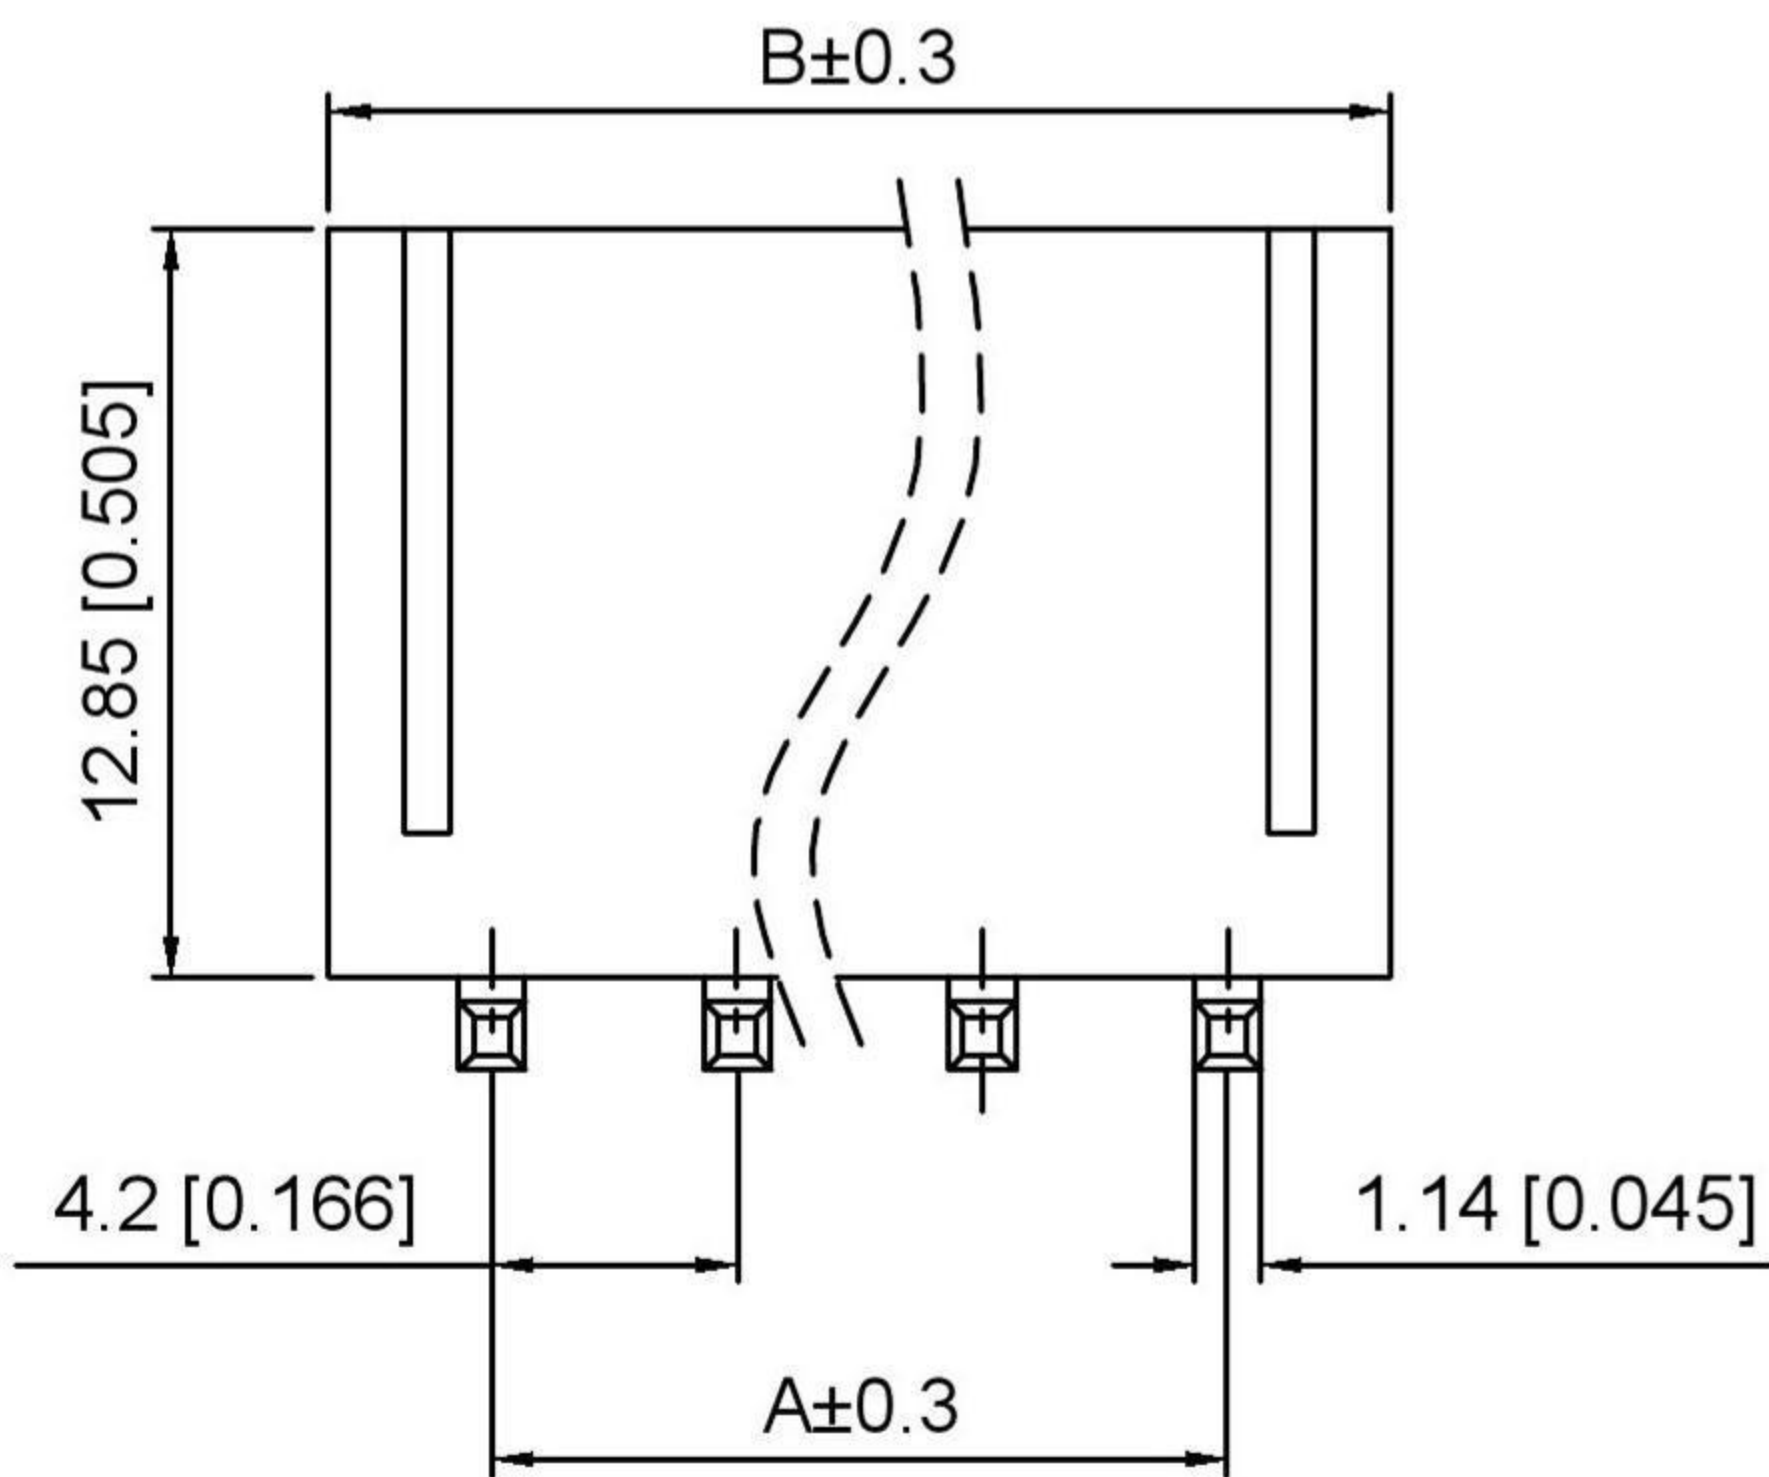

PCB Layout

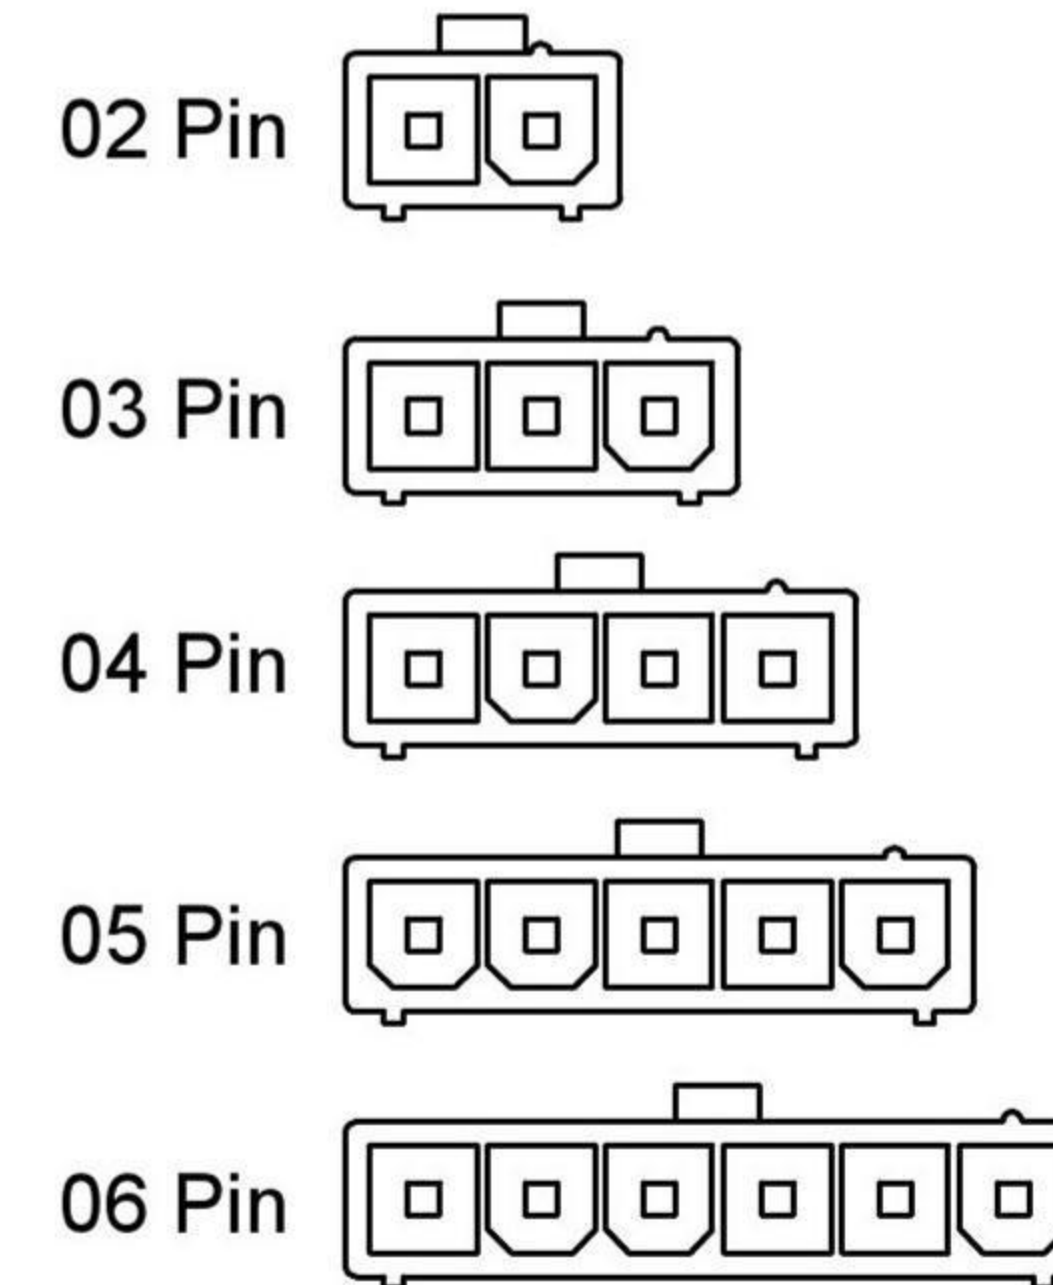



Circuit size Layout





X9357 W R - XX - N2 SN
 ① ② ③ ④ ⑤ ⑥

1. Series No
2. Category:W-Wafer
3. Welding Board Angle:R-Stright 90°
4. Row No. Pin No:XX-02~06P
5. Material:N0-PA66 UL94V-0 ;
N2-PA66 UL94V-2
6. Plating:SN-Tin Plated


Poles	Dimensions(mm)	
	A	B
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60

X9357WR-XX-N2SN	PA66	Brass	X9357HM
PART NO	Material	Material(Pin)	Suitable Housing

				ANGLAR	±5°	 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD		SIZE: A4			
				L > 63	±0.5					WEIGHT	SHEET	REVISION
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0	
www.alpsr.com www.gdxjdz.com www.xbswitch.com												

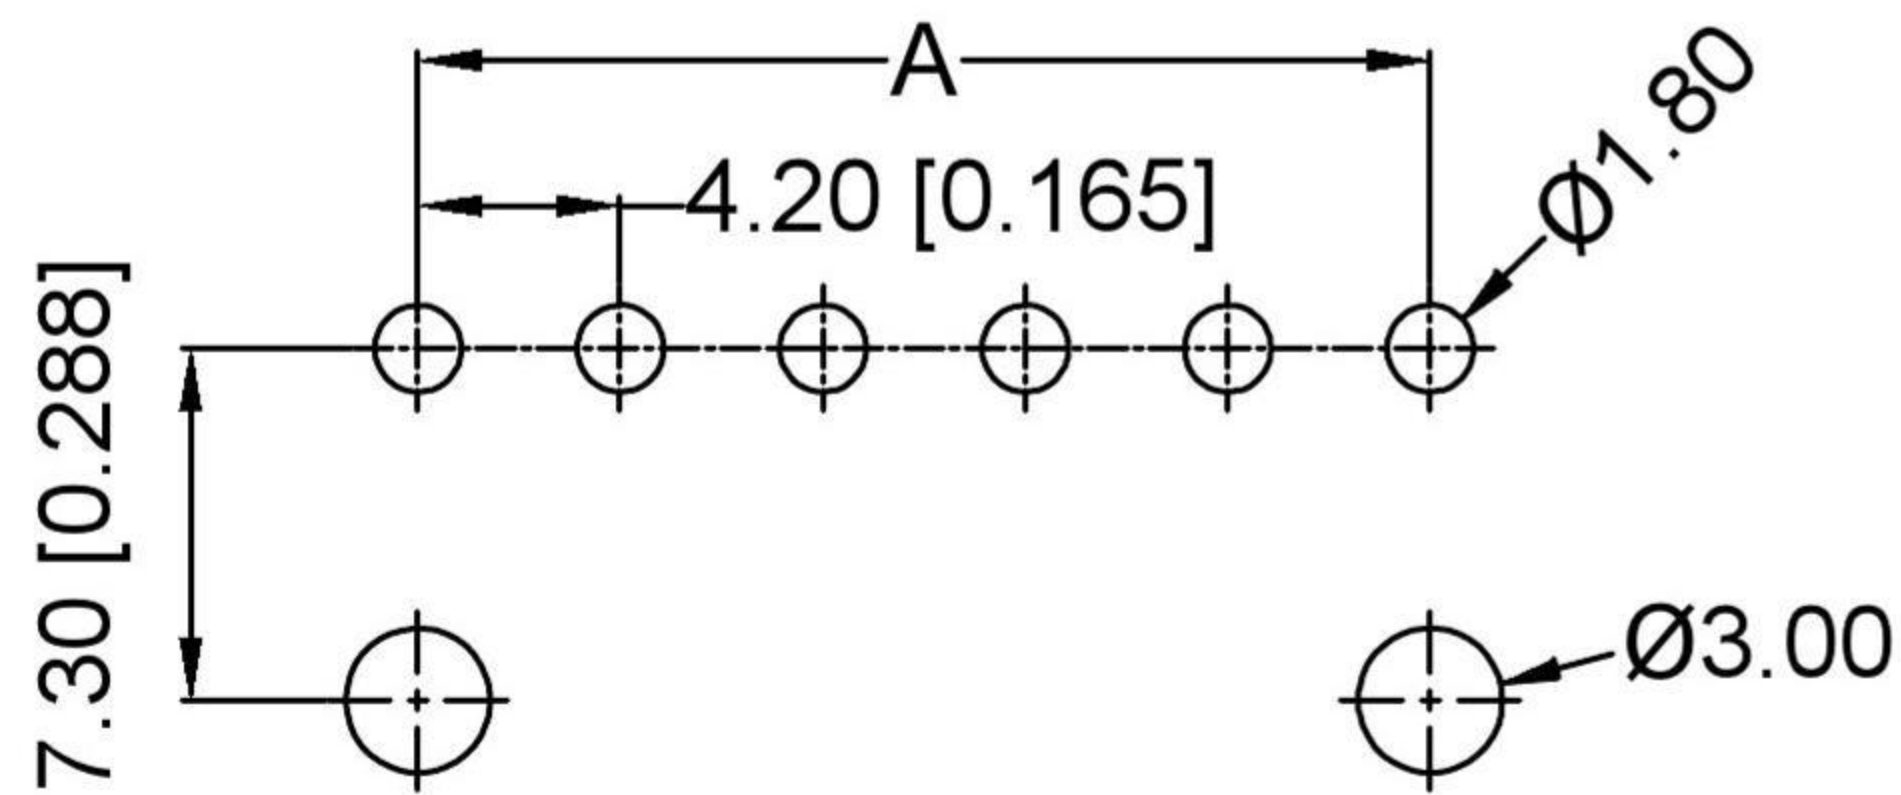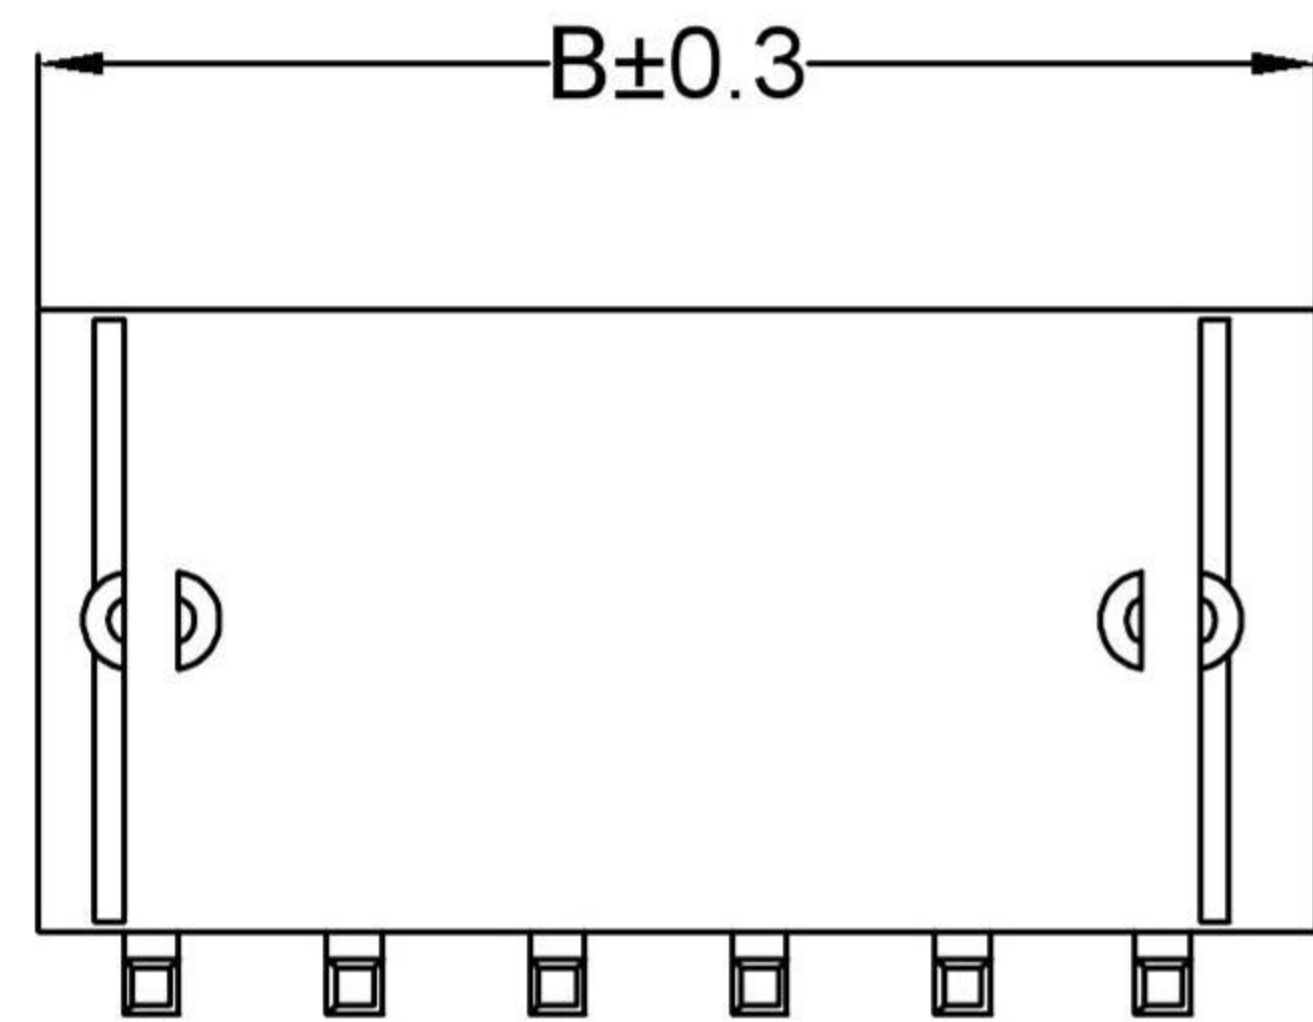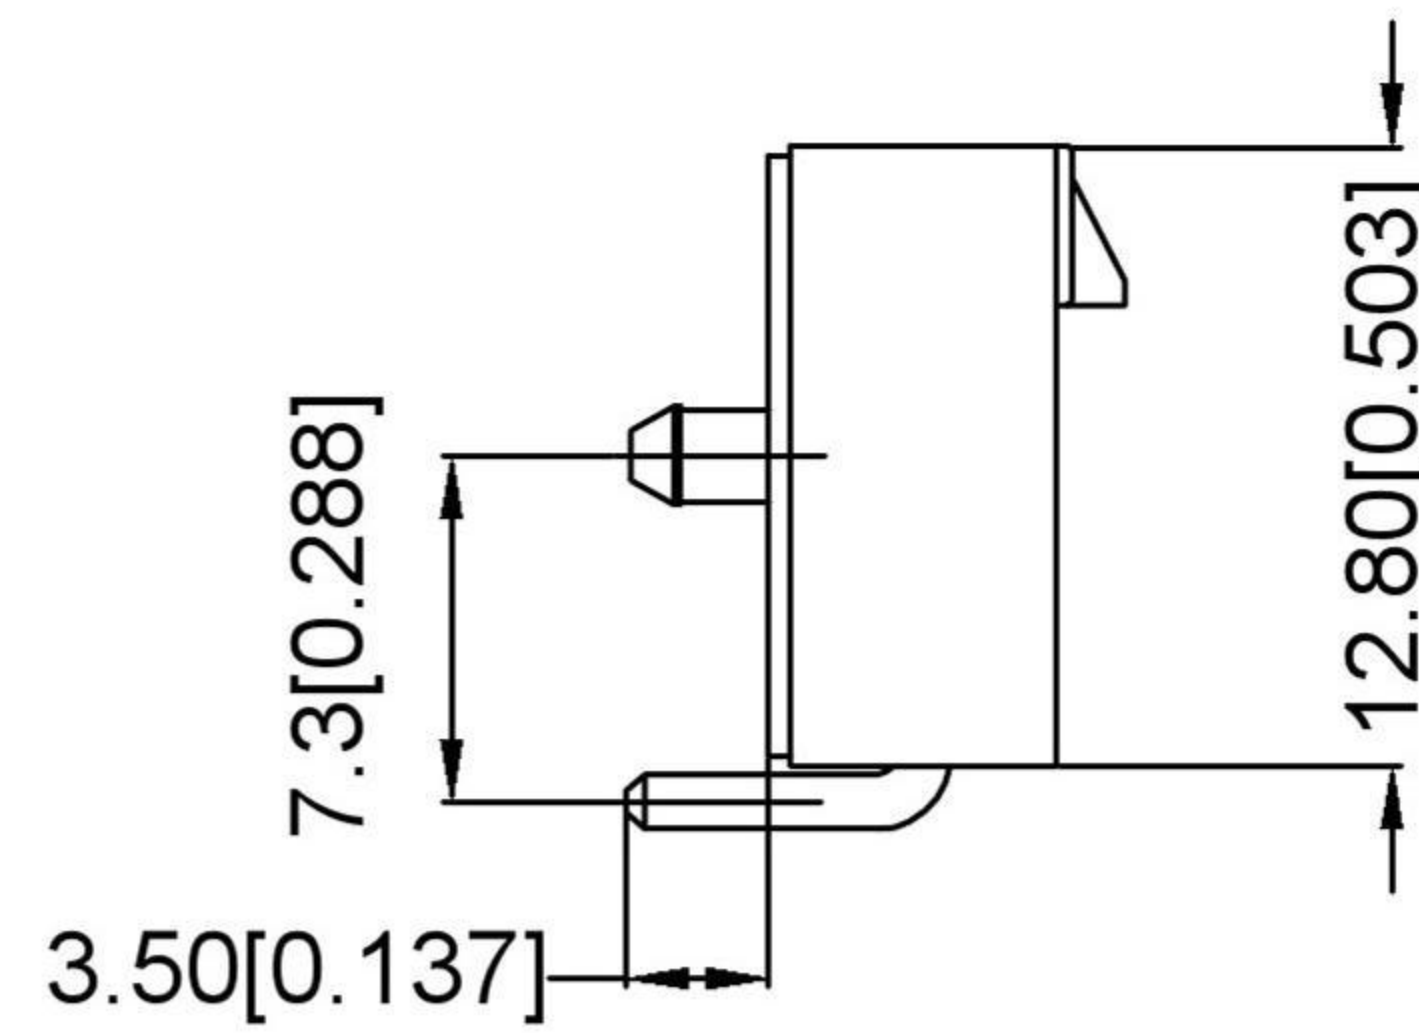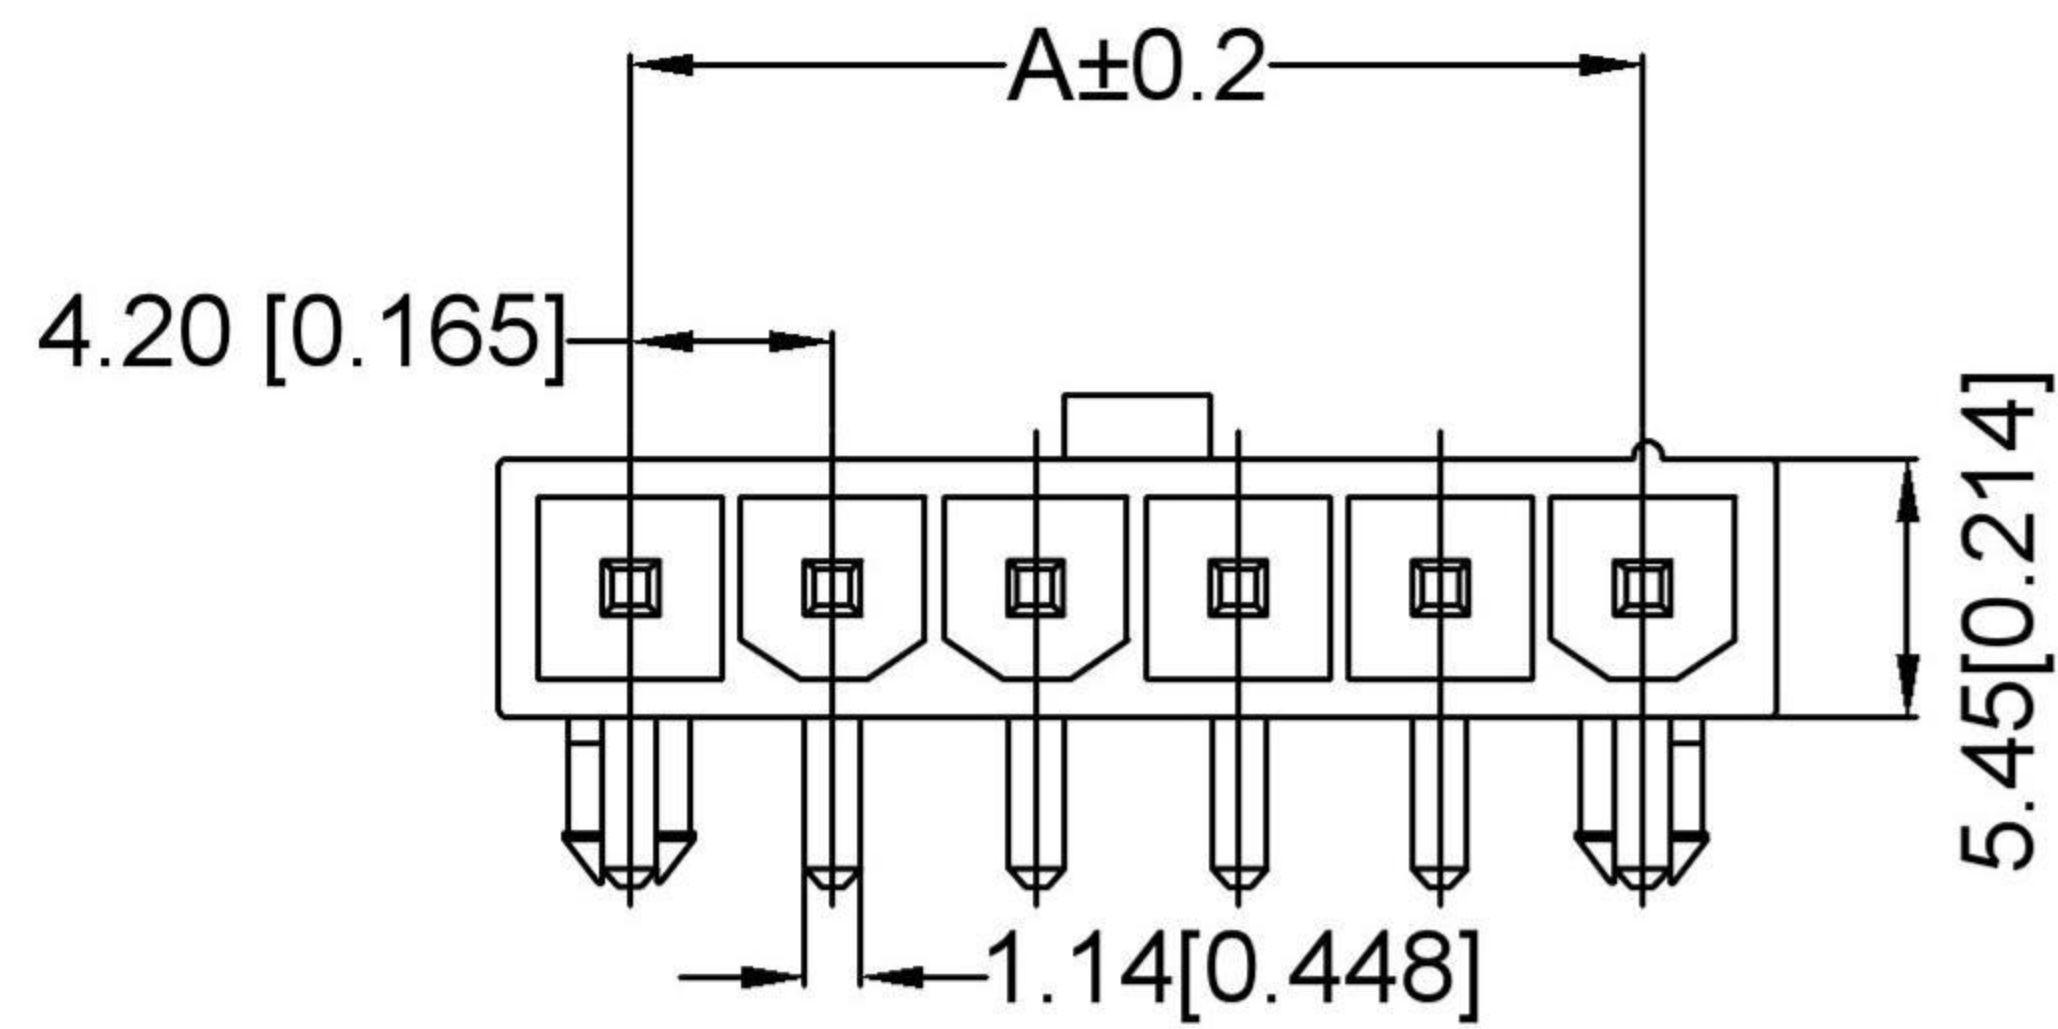

Recommend P.C.B Layout
General Tolerance ±0.05

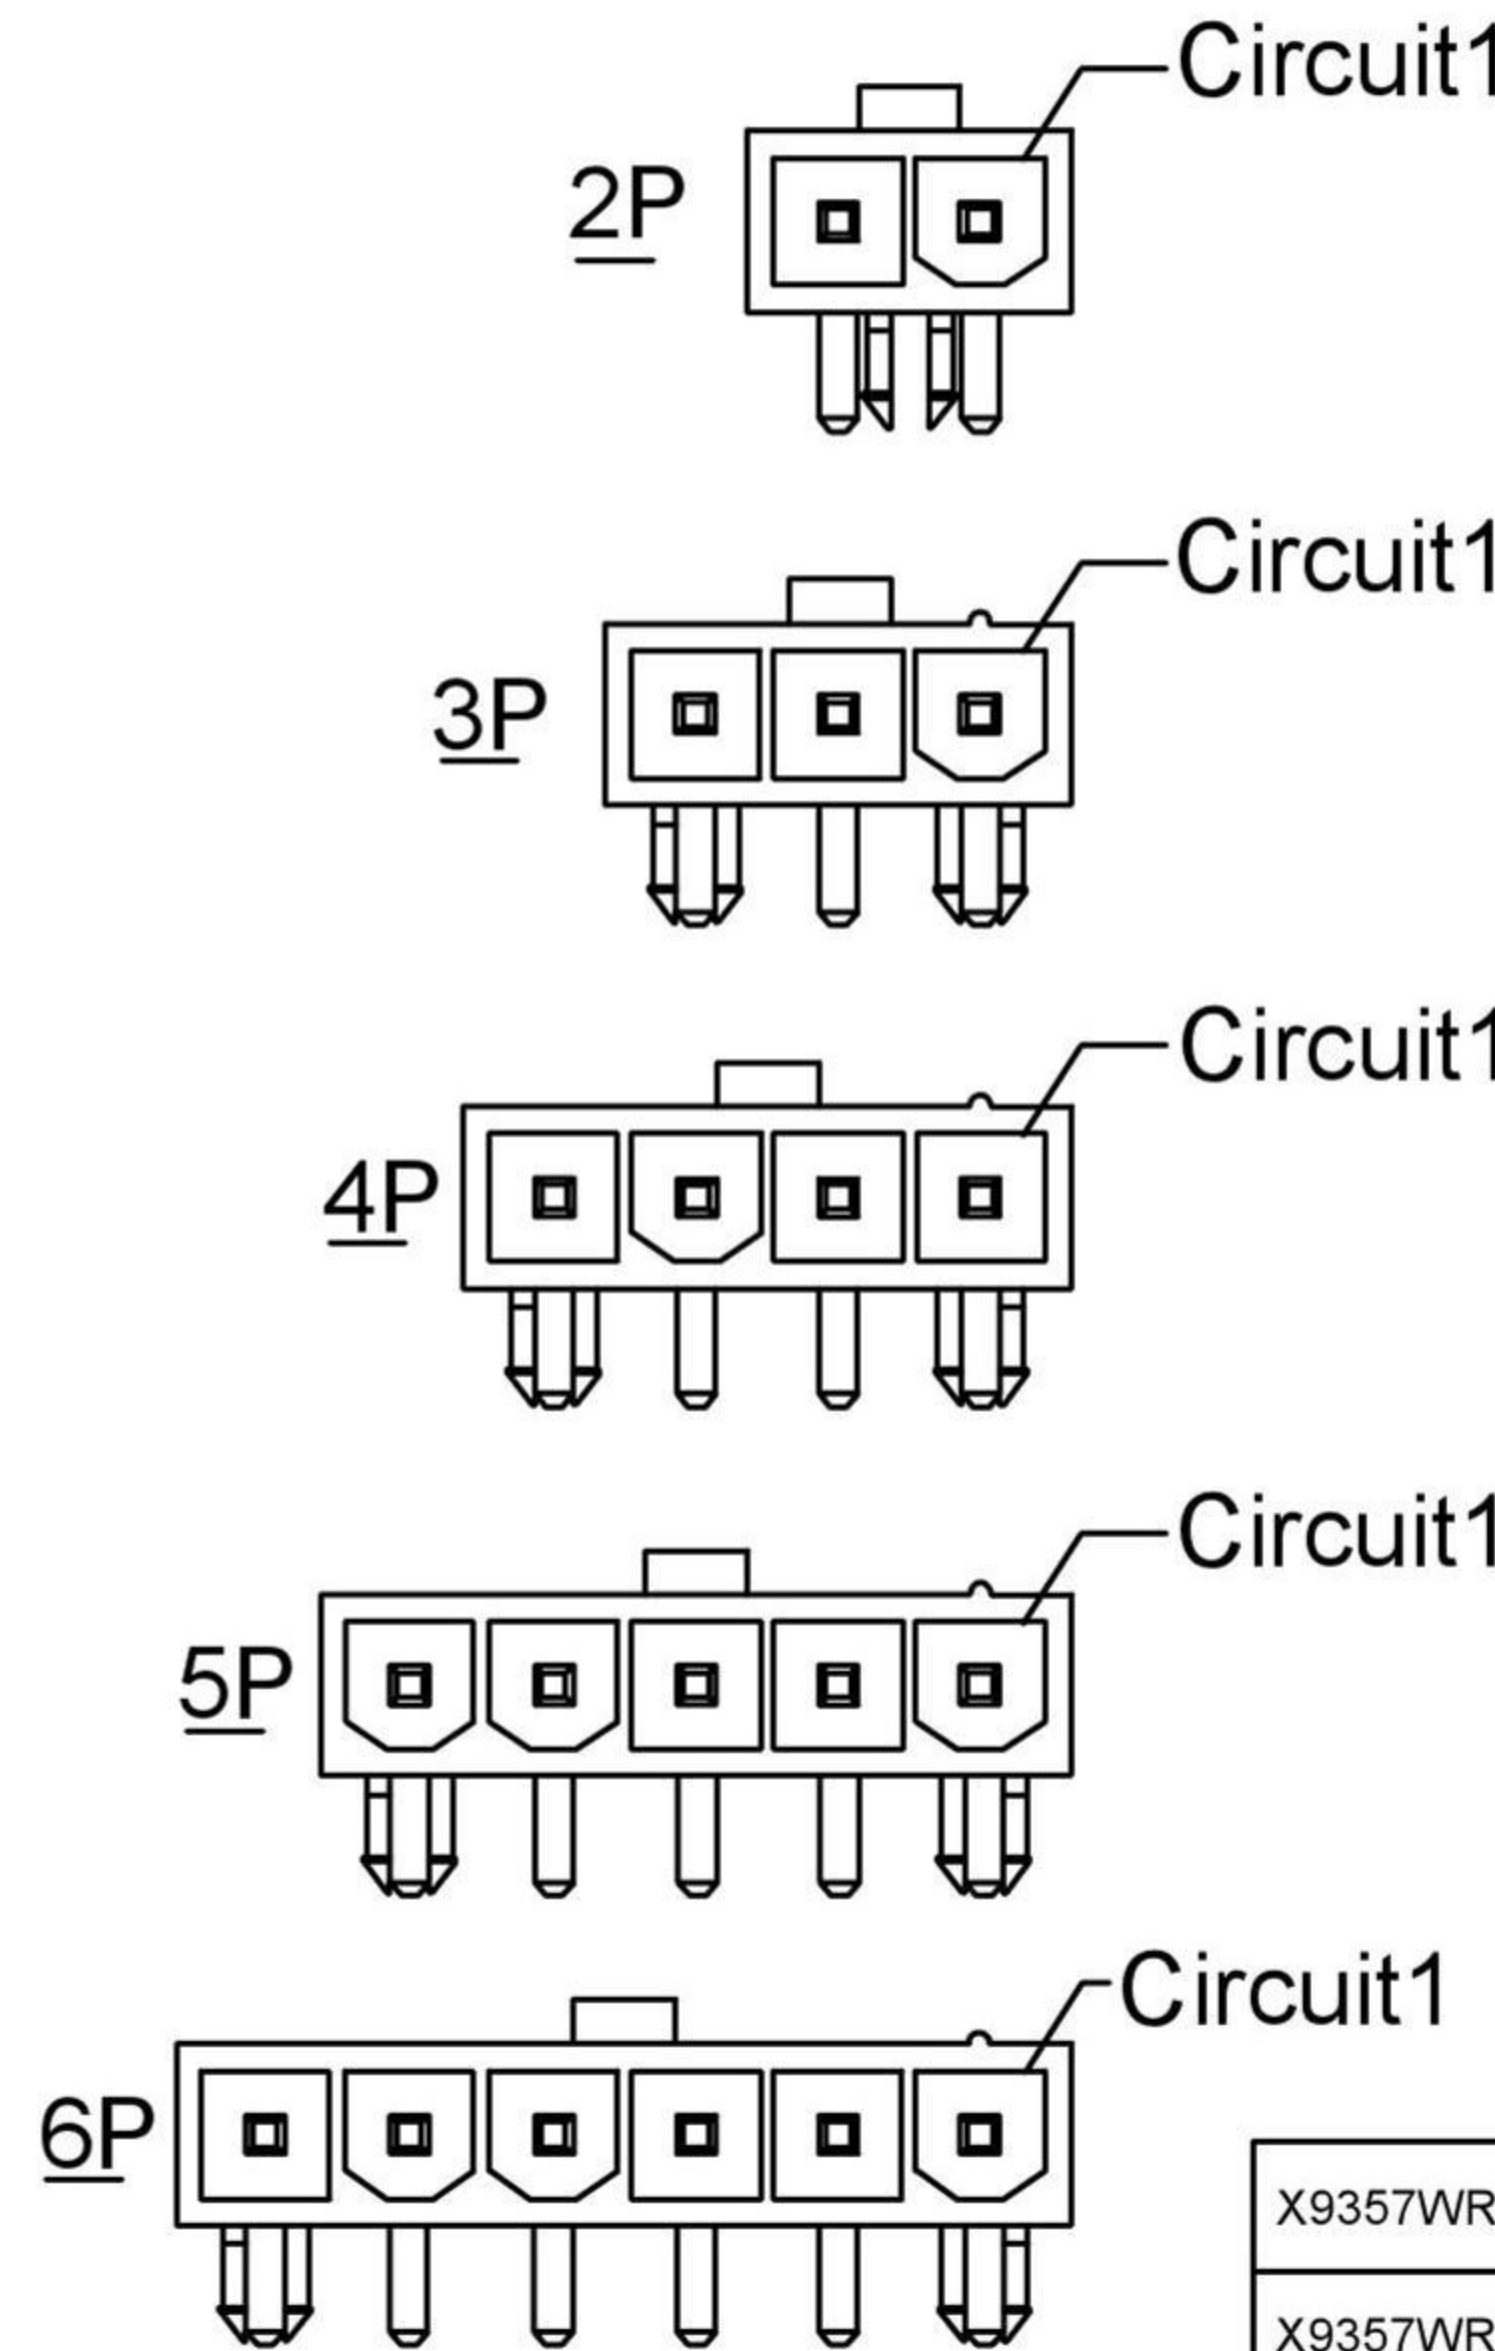

Specifications:

规格:
Voltage rating:600V AC/DC
 额定电压: 600V AC/DC
Current rating:9A AC/DC
 额定电流: 9A AC/DC
Withstanding voltage:1500V AC/minute
 耐受电压: 1500V AC/分钟
Temperature range:-25℃~+85℃
 温度范围: -25℃~+85℃
Insulation resistance:≥1000MΩ
 绝缘电阻: ≥1000MΩ
Contact resistance:≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing:≤20mΩ
 环境测试后: ≤20兆欧

X9357 W R X-XX S-XXSNXX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 01 Series No.
- 02 Category:W-wafer
- 03 Welding Board Angle: R-Right Angle 90'
- 04 Welding Way: Blank-DIP;
- 05 Row No.-Pin No.: XX-Single row
- 06 Special NO.: S-With positioning column
- 07 Material:N0-PA66 94V-0;
N2-PA66 94V-2
- 08 Planting Category: SN-Bright tin plating
- 09 Color:E Blank-natural color ;BK-Black










Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

X9357WR-XXS-N2SNBK	Nylon 66 UL94V-2 (Black)	Brass	Tin-Plated	X9357H	
X9357WR-XXS-N0SN	Nylon 66 UL 94V-0				
X9357WR-XXS-N2SN	Nylon 66 UL 94V-2				
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable	Terminal

REVISIONS				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DWN		VIEW:	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	WEIGHT	SHEET	REVISION
DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0

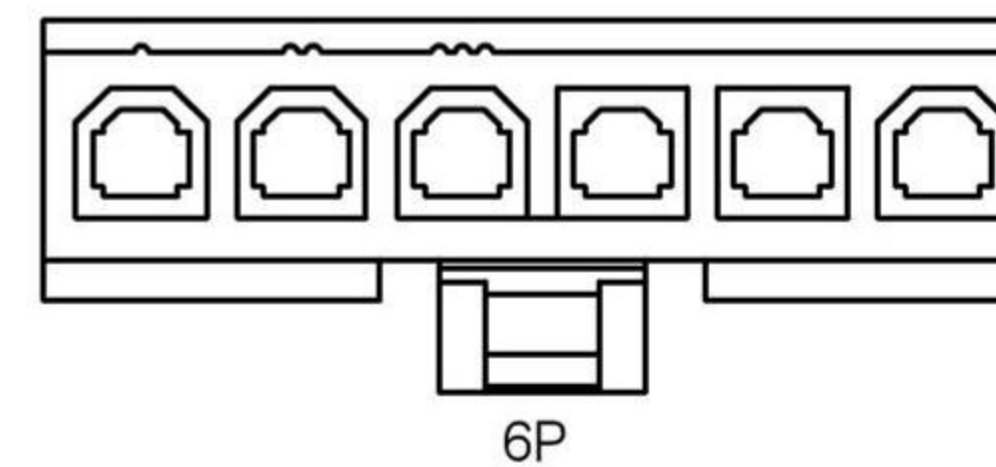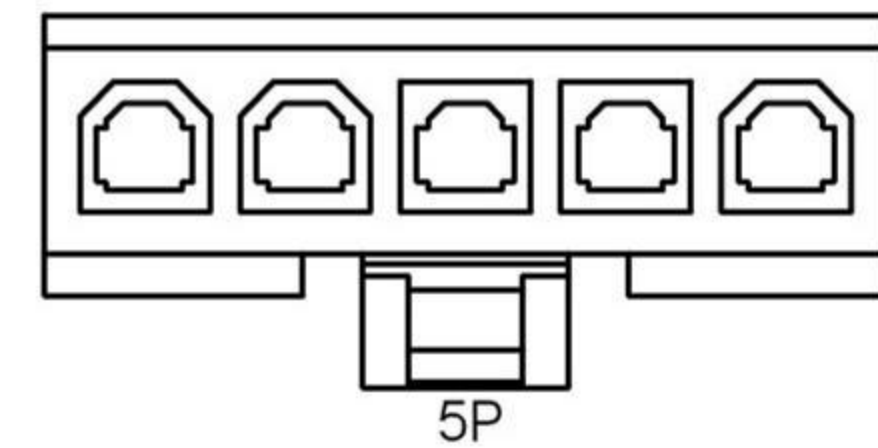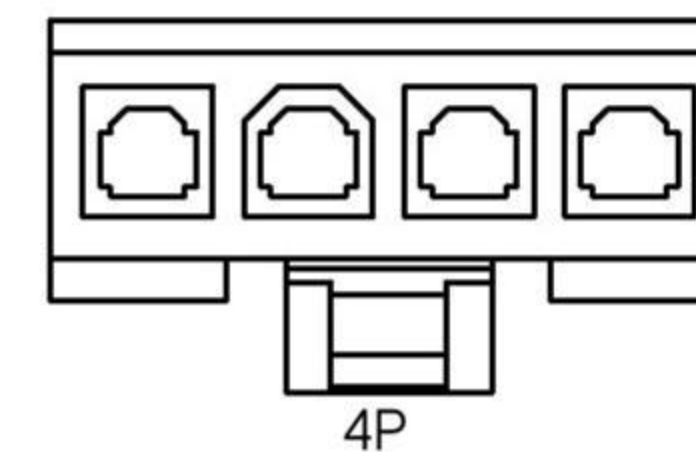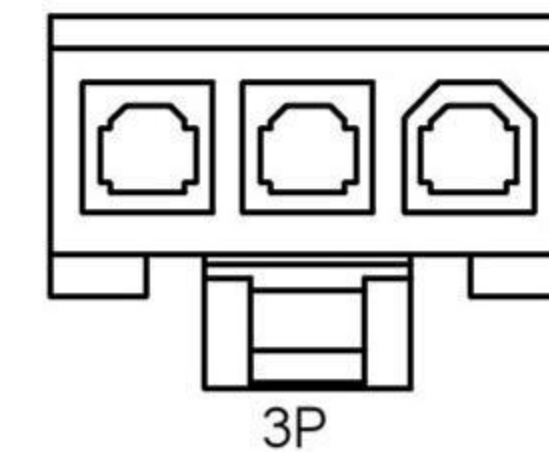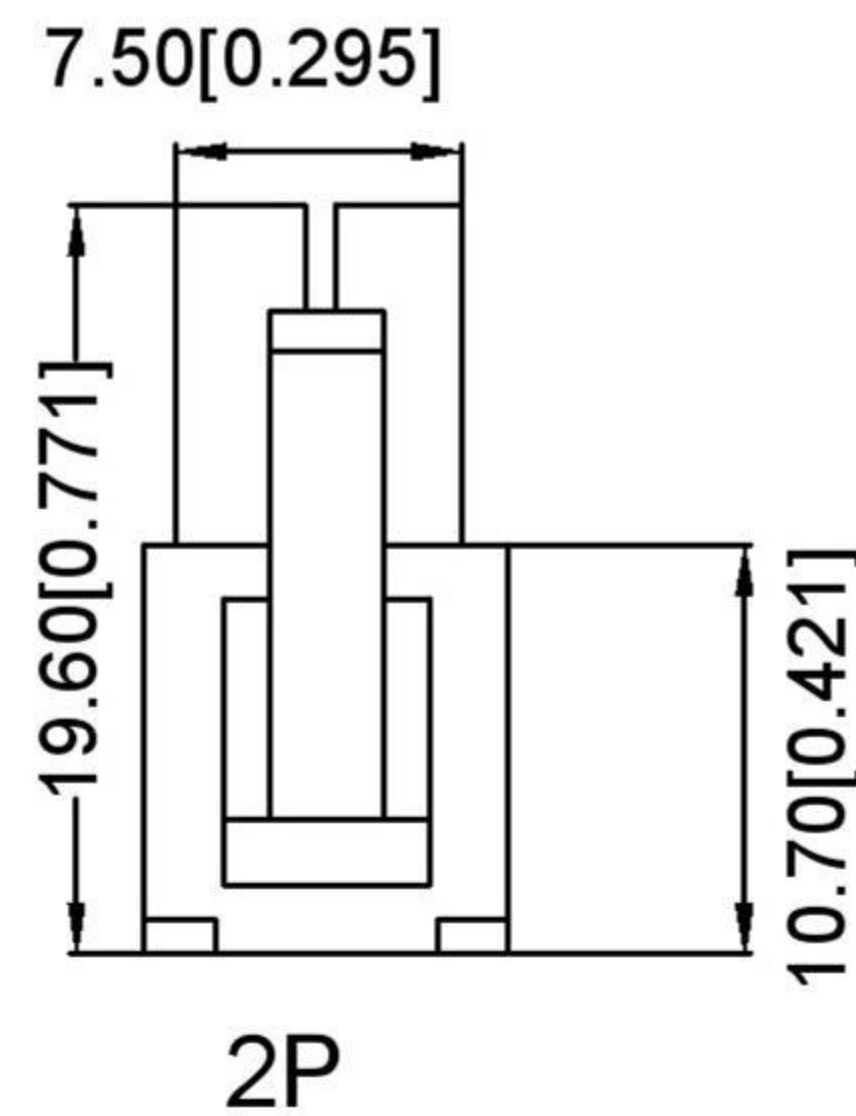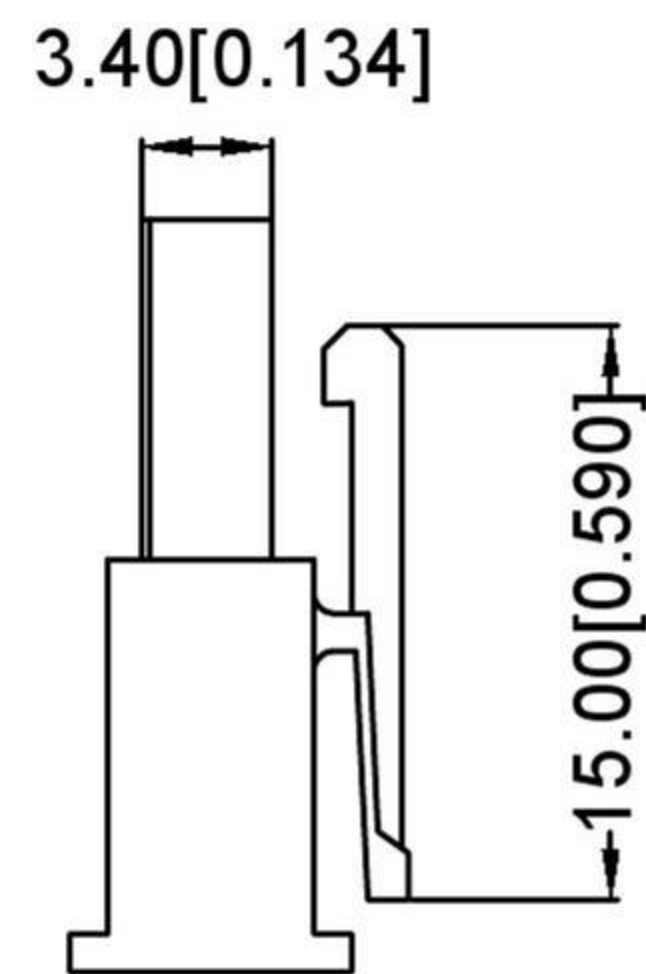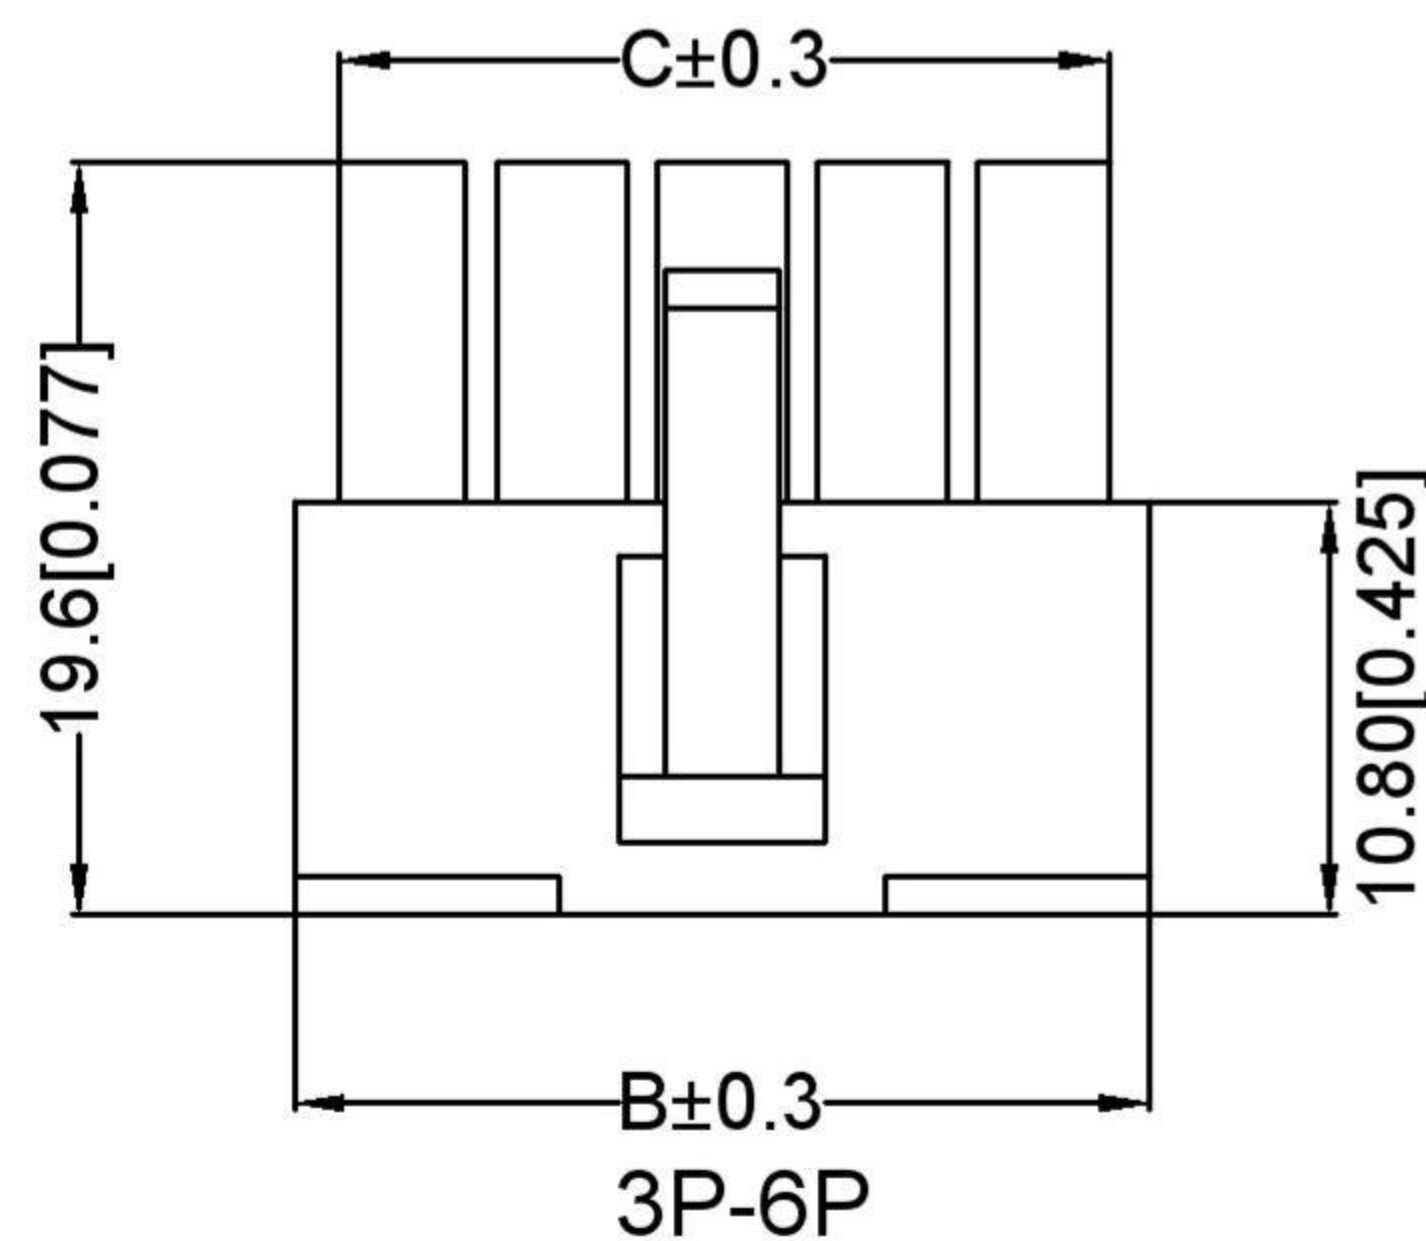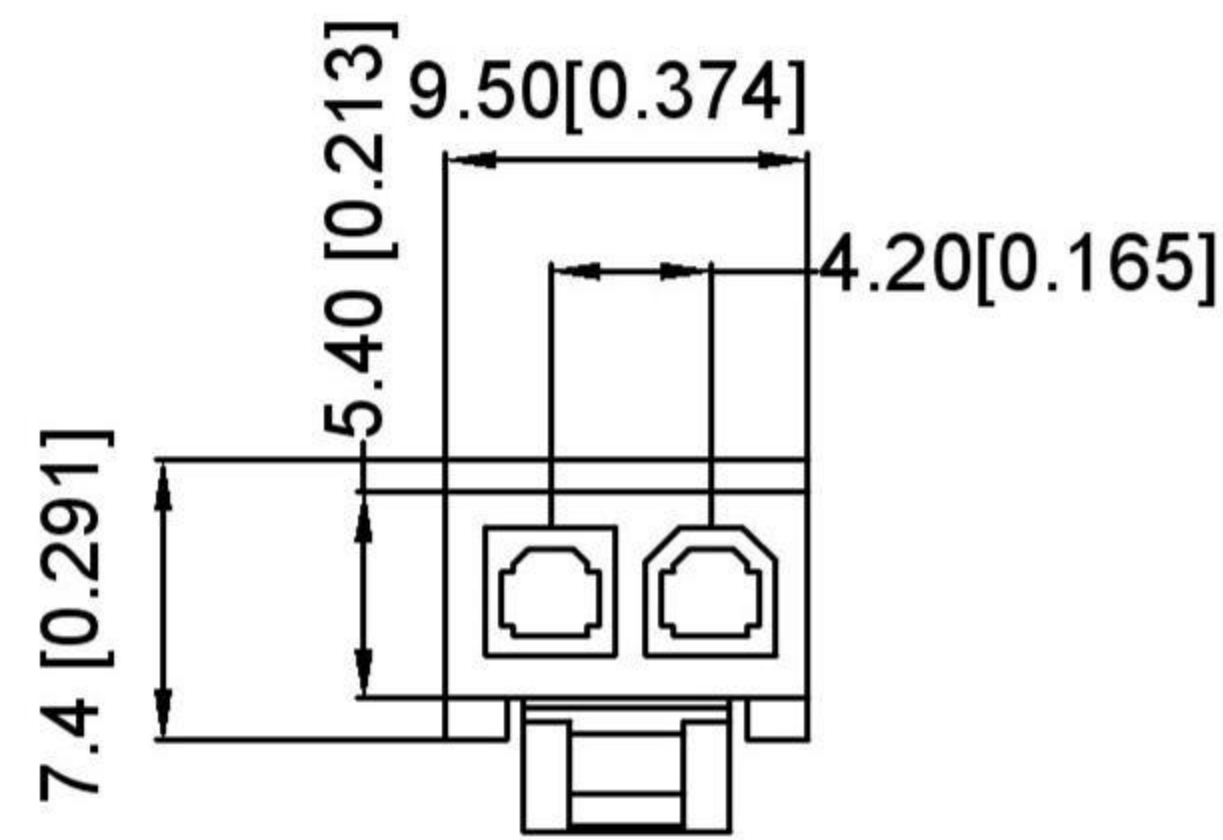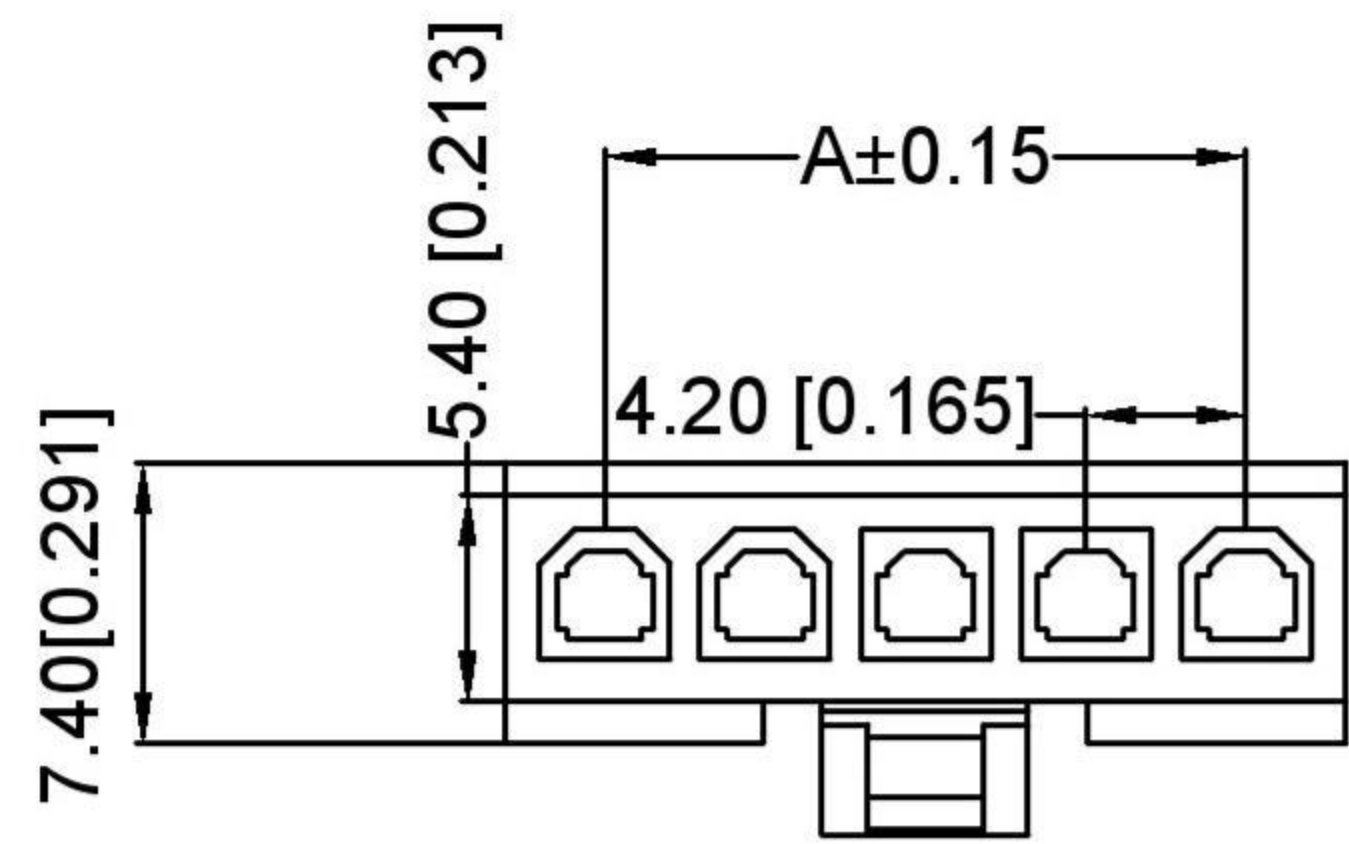

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Current rating:9A AC/DC

额定电流: 9A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance:≥1000MΩ

绝缘电阻: ≥100MΩ

Contact resistance:≤10mΩ

接触电阻: ≤10mΩ

After environmental testing:≤20mΩ

环境测试后: ≤20兆欧

X9357 H M -XX -XX XX XX
 ① ② ③ ④ ⑤ ⑥ ⑦

01 Series No.

02 Category:H-HSG

03 Welding Board Angle:M-Male housing

04 RowNo.-PinNo.:XX-02P~16P

05 Plug the Pin & special No.:

06 Material:N0-PA66 94V-0:N2-PA66 94V-2

07 Color:Blank-Natural Color







Poles	Dimensions(mm)		
	A	B	C
02	4.20	9.60	7.50
03	8.40	13.80	11.60
04	12.60	18.00	15.80
05	16.80	22.20	20.20
06	21.00	26.40	24.10

X9357HM-XX-N2	Nylon 66 94V-2	X9357TF	X9357W Or 9357H		
X9357HM-XX-N0	Nylon 66 94V-0				
PART NO	Material	Suitable	Terminal	Suitable	Terminal

REVISIONS				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DWN		VIEW:	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	WEIGHT	SHEET	REVISION
DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0

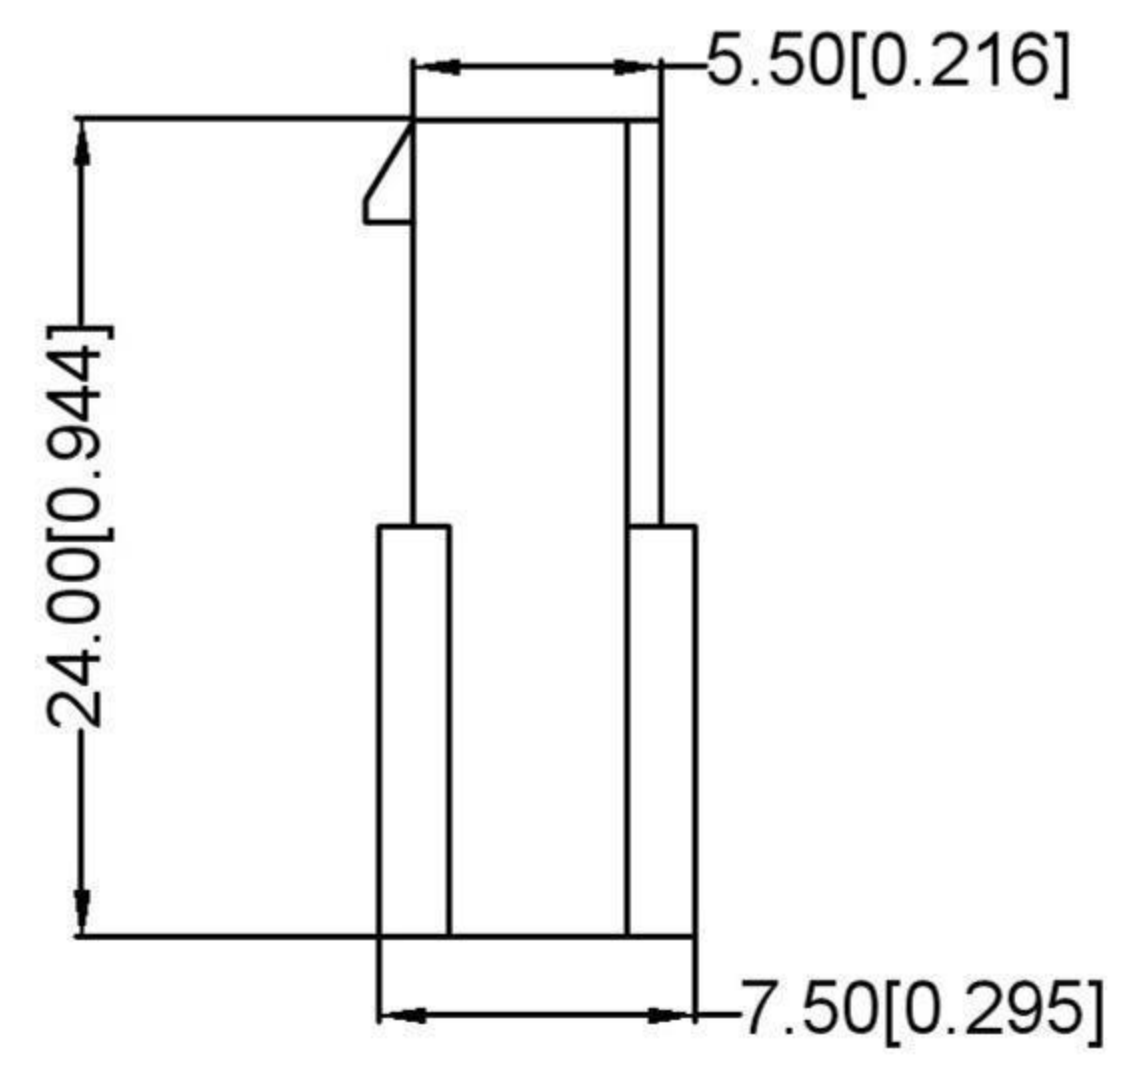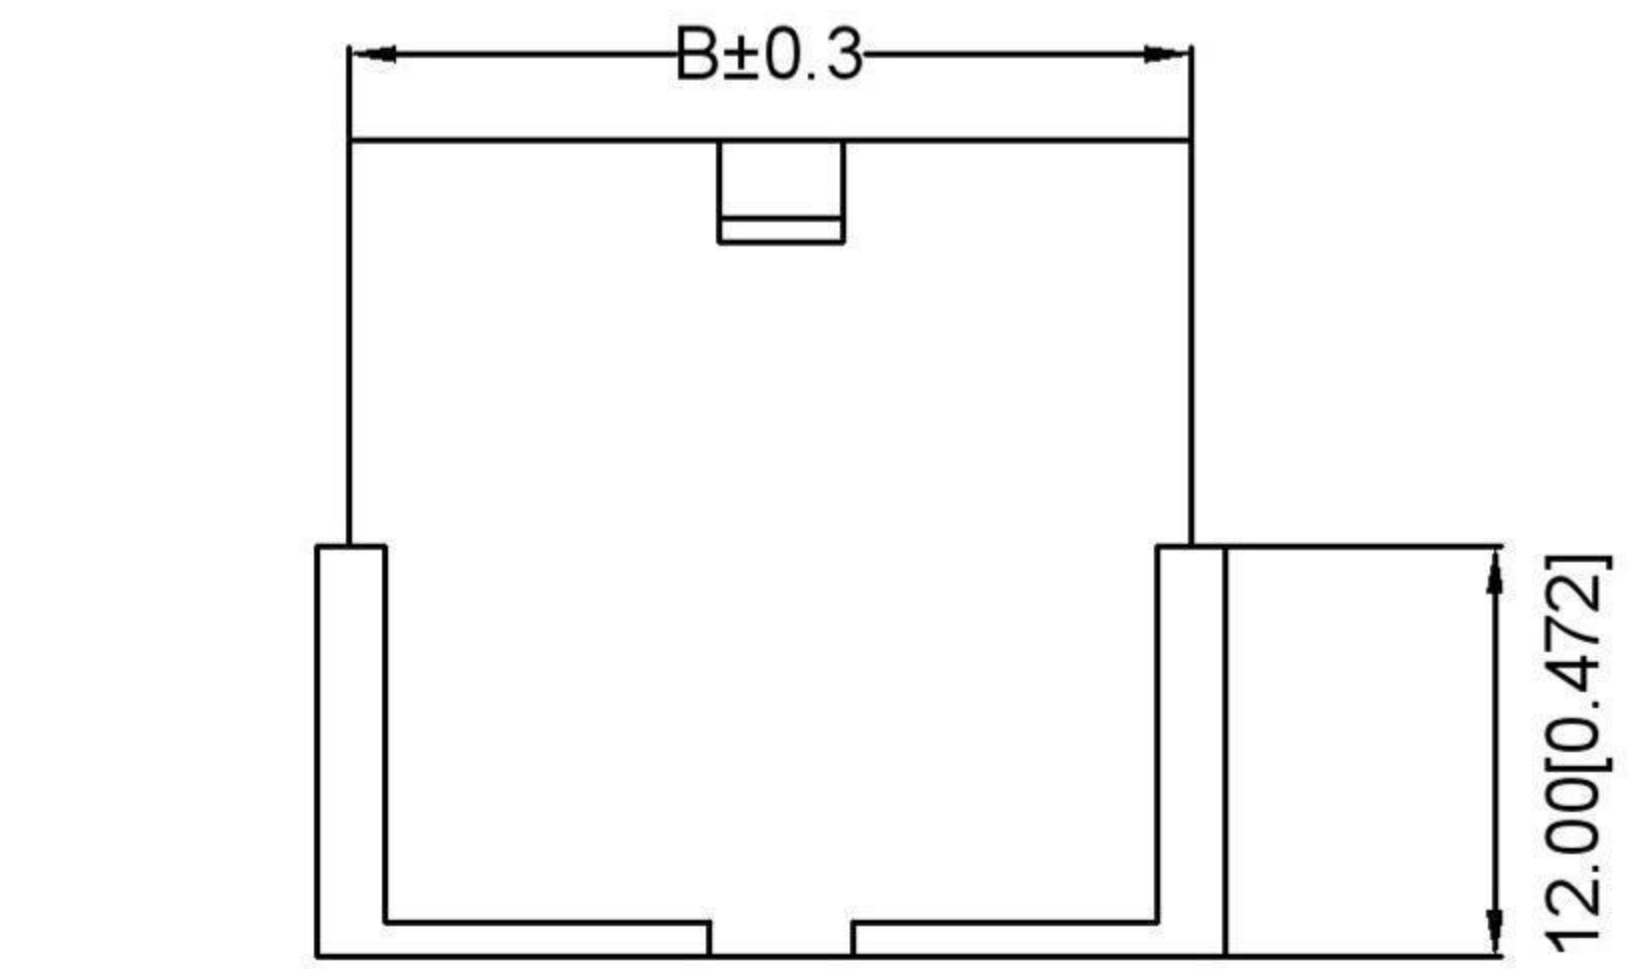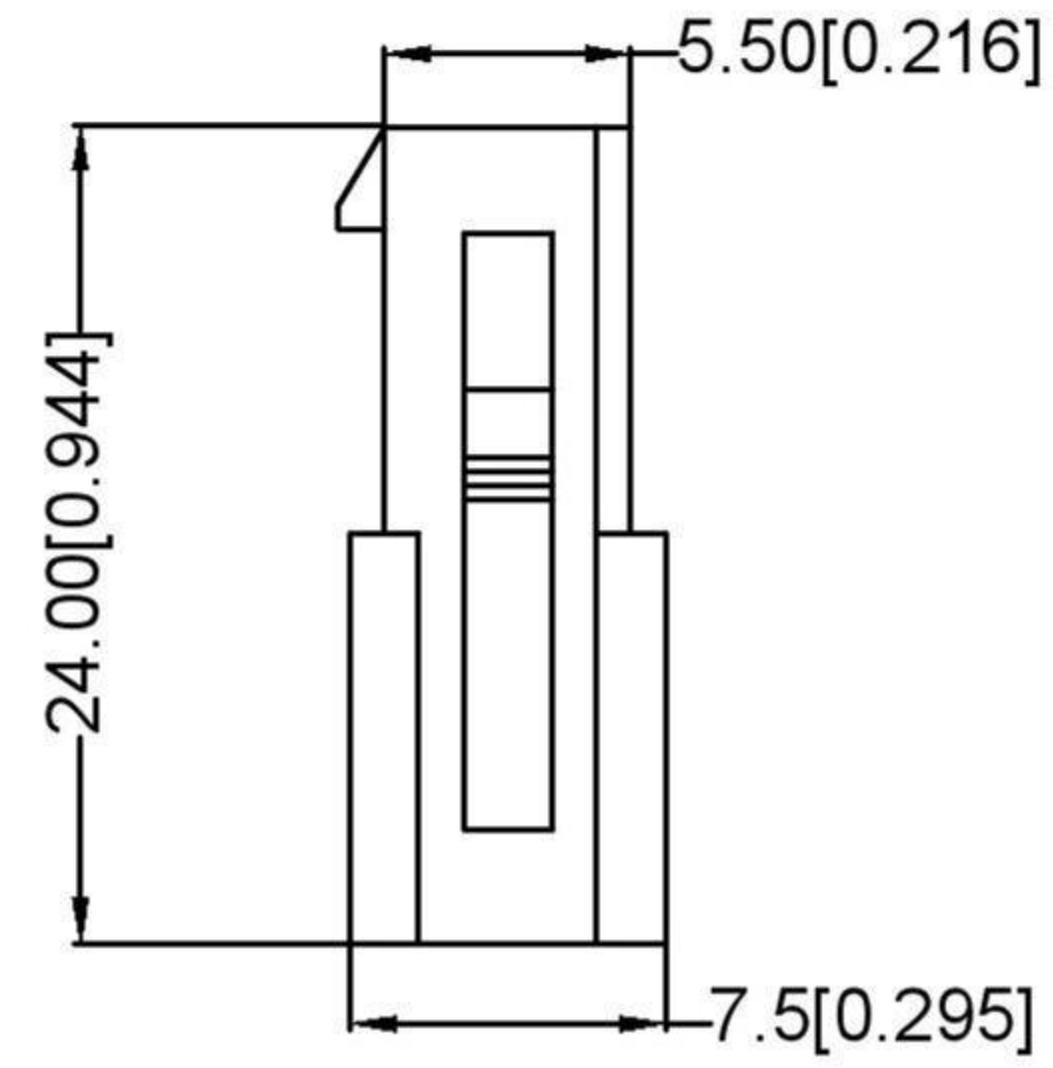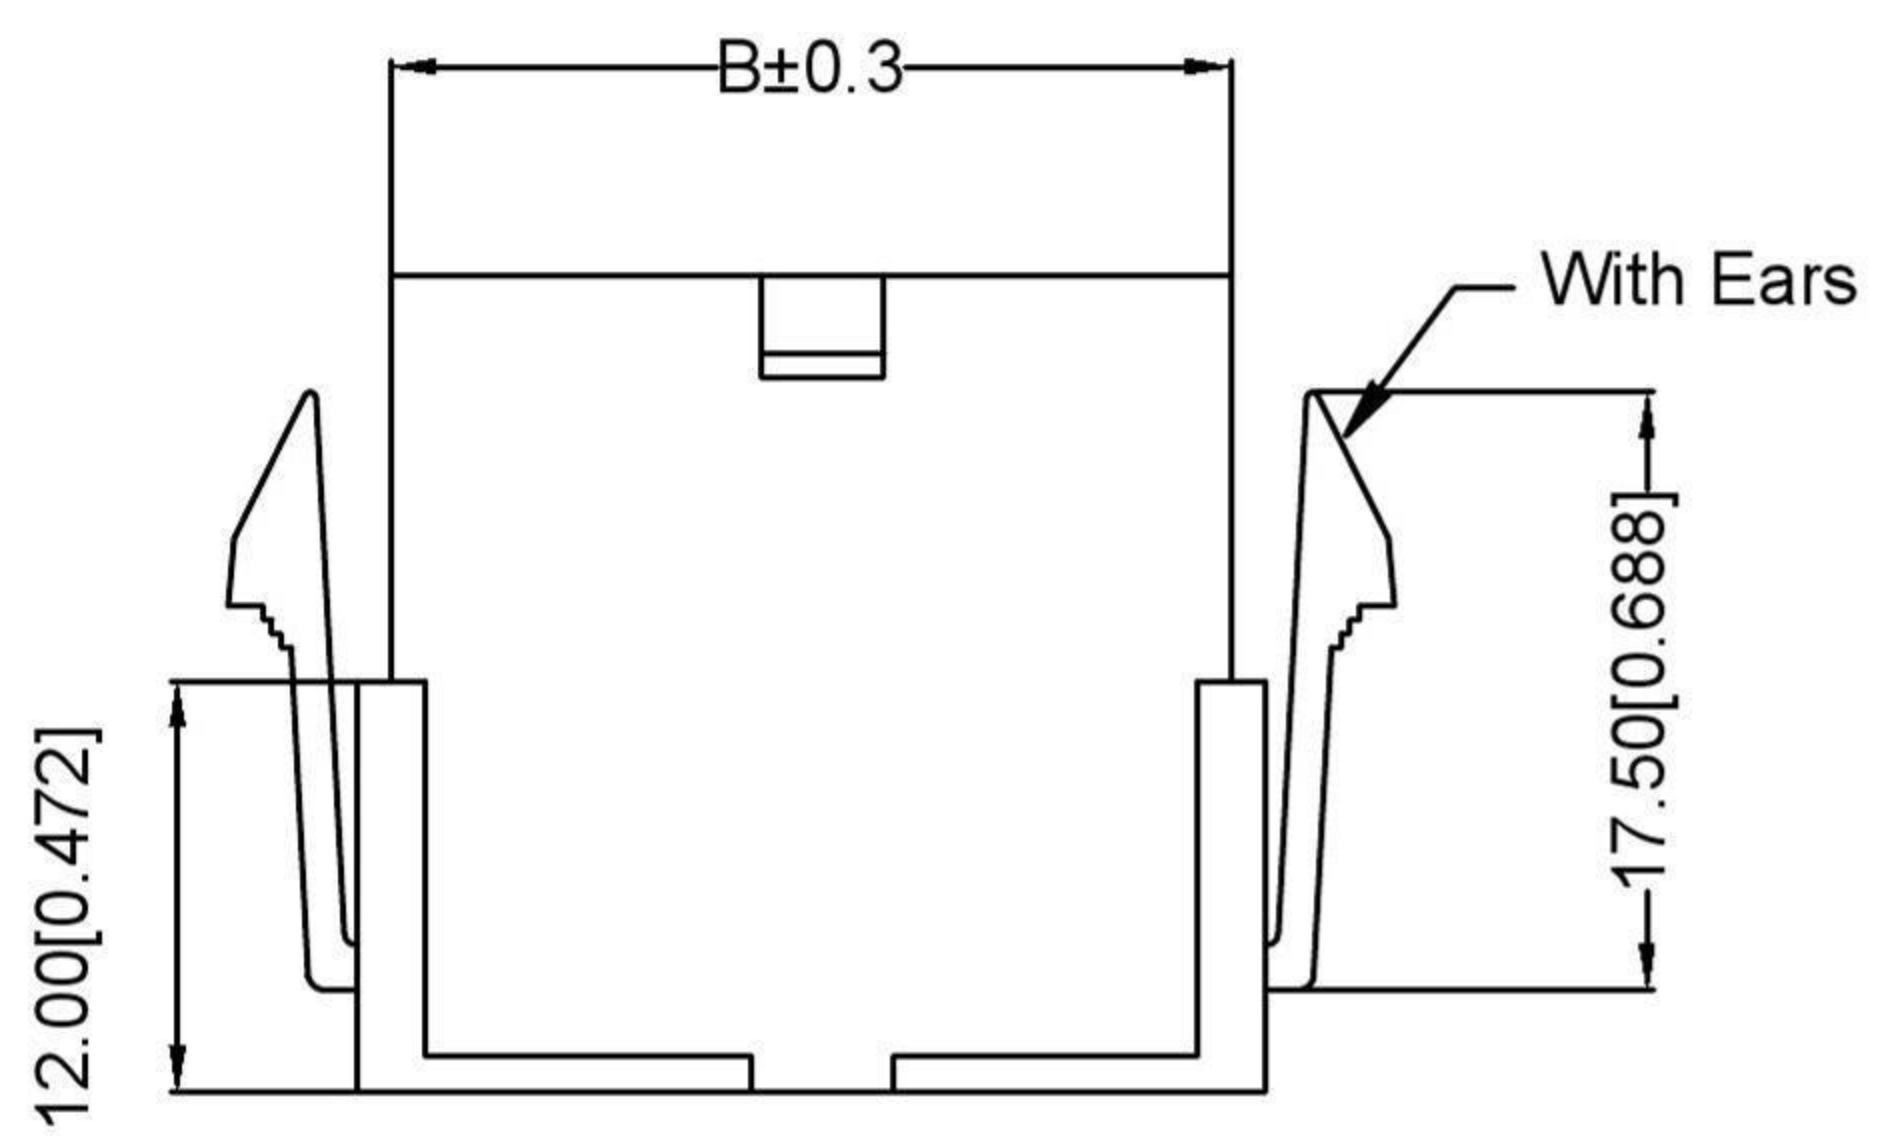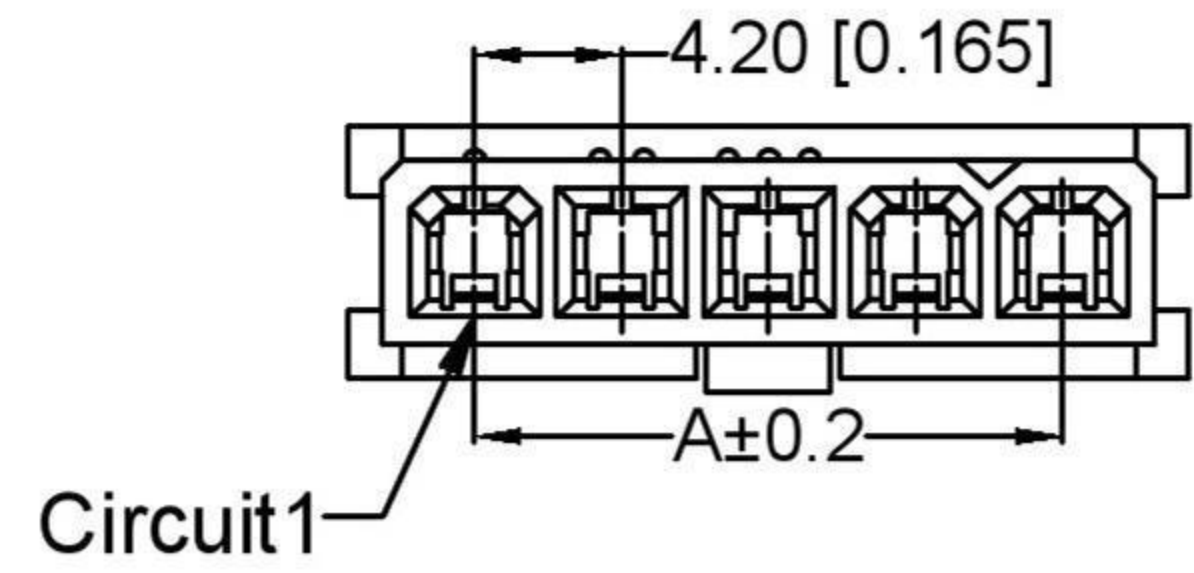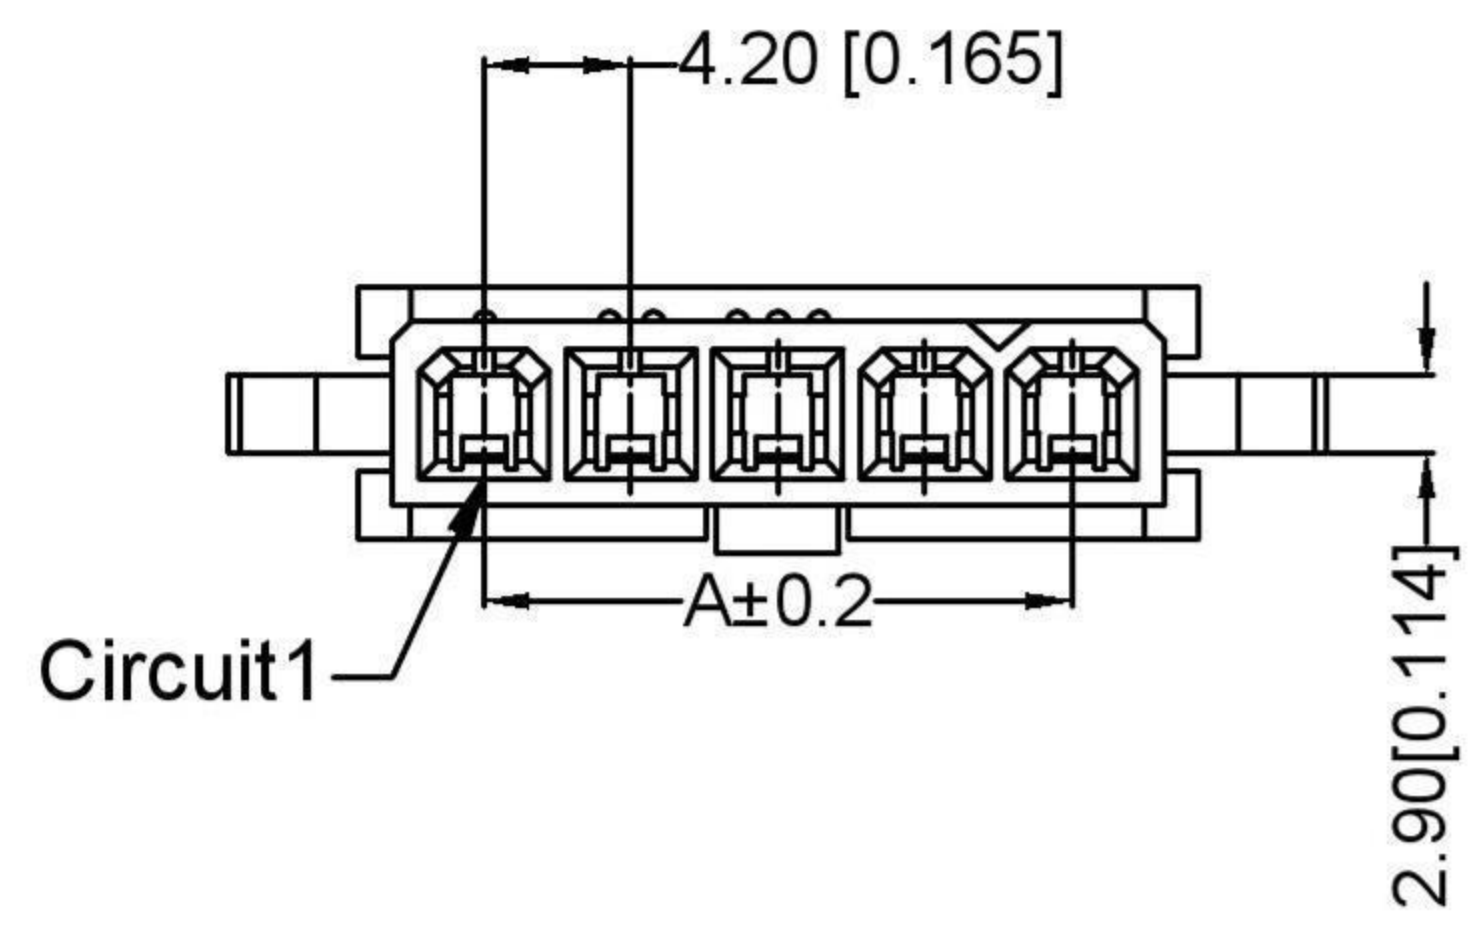

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Current rating:9A AC/DC

额定电流: 9A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance:≥1000MΩ

绝缘电阻: ≥100MΩ

Contact resistance:≤10mΩ

接触电阻: ≤10mΩ

After environmental testing:≤20mΩ

环境测试后: ≤20兆欧

X9357 H F -XX X-XX XX
 ① ② ③ ④ ⑤ ⑥ ⑦

- 01 Series No.
- 02 Category:H-HSG
- 03 Welding Board Angle:
M-Male housing
- 04 Row No.-Pin No.:XX-02P~16P
- 05 Plug the Pin & special No.:
I-Without the Wing G-With the Wing
- 06 Material:N0-PA66 94V-0
N2-PA66 94V-2
- 07 Color:Blank-Natural Color

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	4.20	9.80	08	29.40	35.00
03	8.40	14.00	09	33.60	39.20
04	12.60	18.20	10	37.80	43.40
05	16.80	22.40	11	42.00	47.60
06	21.00	26.60	12	46.20	51.80
07	25.20	30.80			

X9357HF-XXG-N2	Nylon 66 94V-2	X9357TM	X9357W Or 9357H	With Ears
X9357HF-XXI-N2	Nylon 66 94V-2			Without Ears
X9357HF-XXG-N0	Nylon 66 94V-0			With Ears
X9357HF-XXI-N0	Nylon 66 94V-0			Without Ears
PART NO	Material	Suitable Terminal	Suitable Terminal	Note





REVISIONS	DATE	REVISED	APPROVED	ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					

DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR
DWN		VIEW:	
CHKD		UNIT: mm/in	
APPD		SIZE: A4	

DONG GUAN XI BANG ELECTRONIC CO., LTD

MODEL TYPE: BOARD TO BOARD CONNECTOR
PART NO.:
DWG NO.:
WEIGHT
SHEET
REVISION

1/1 A0

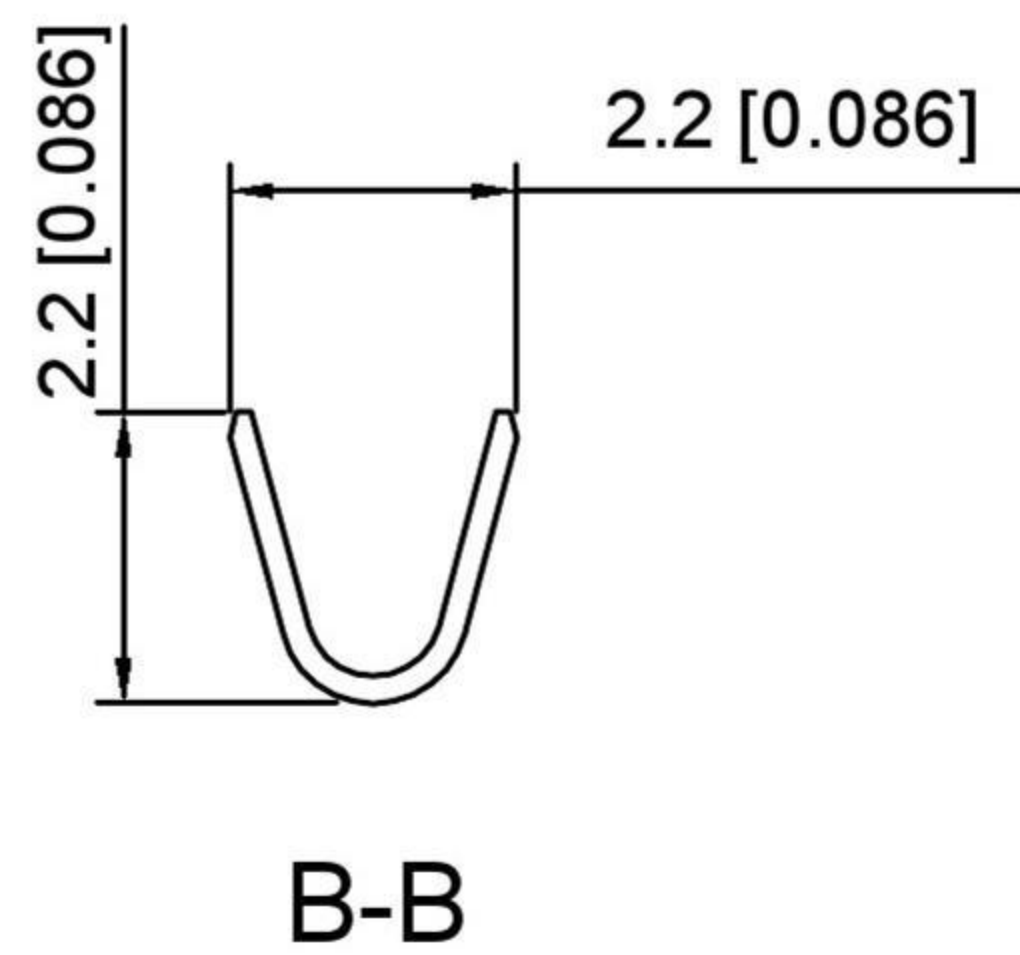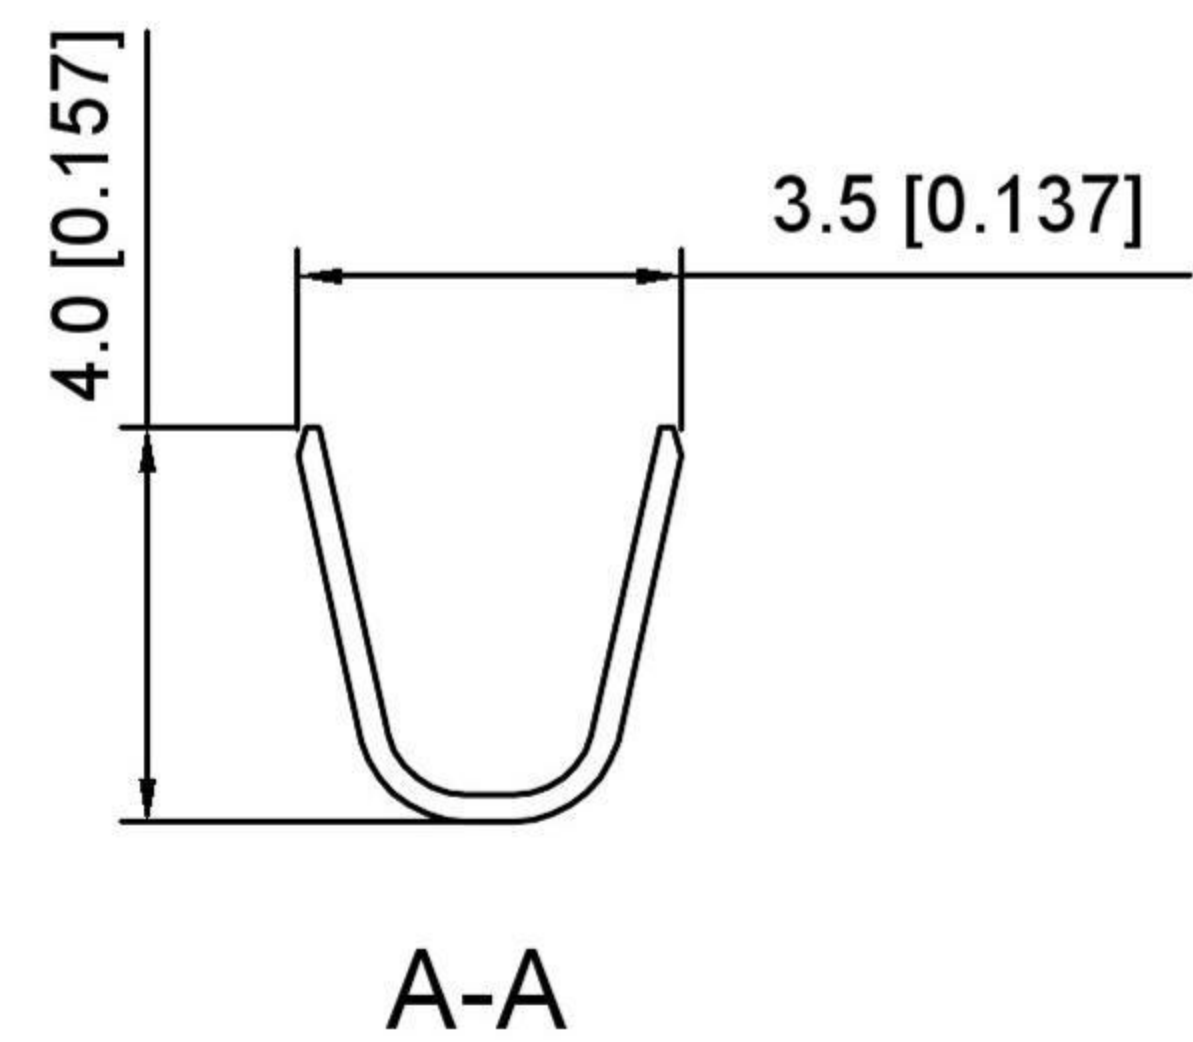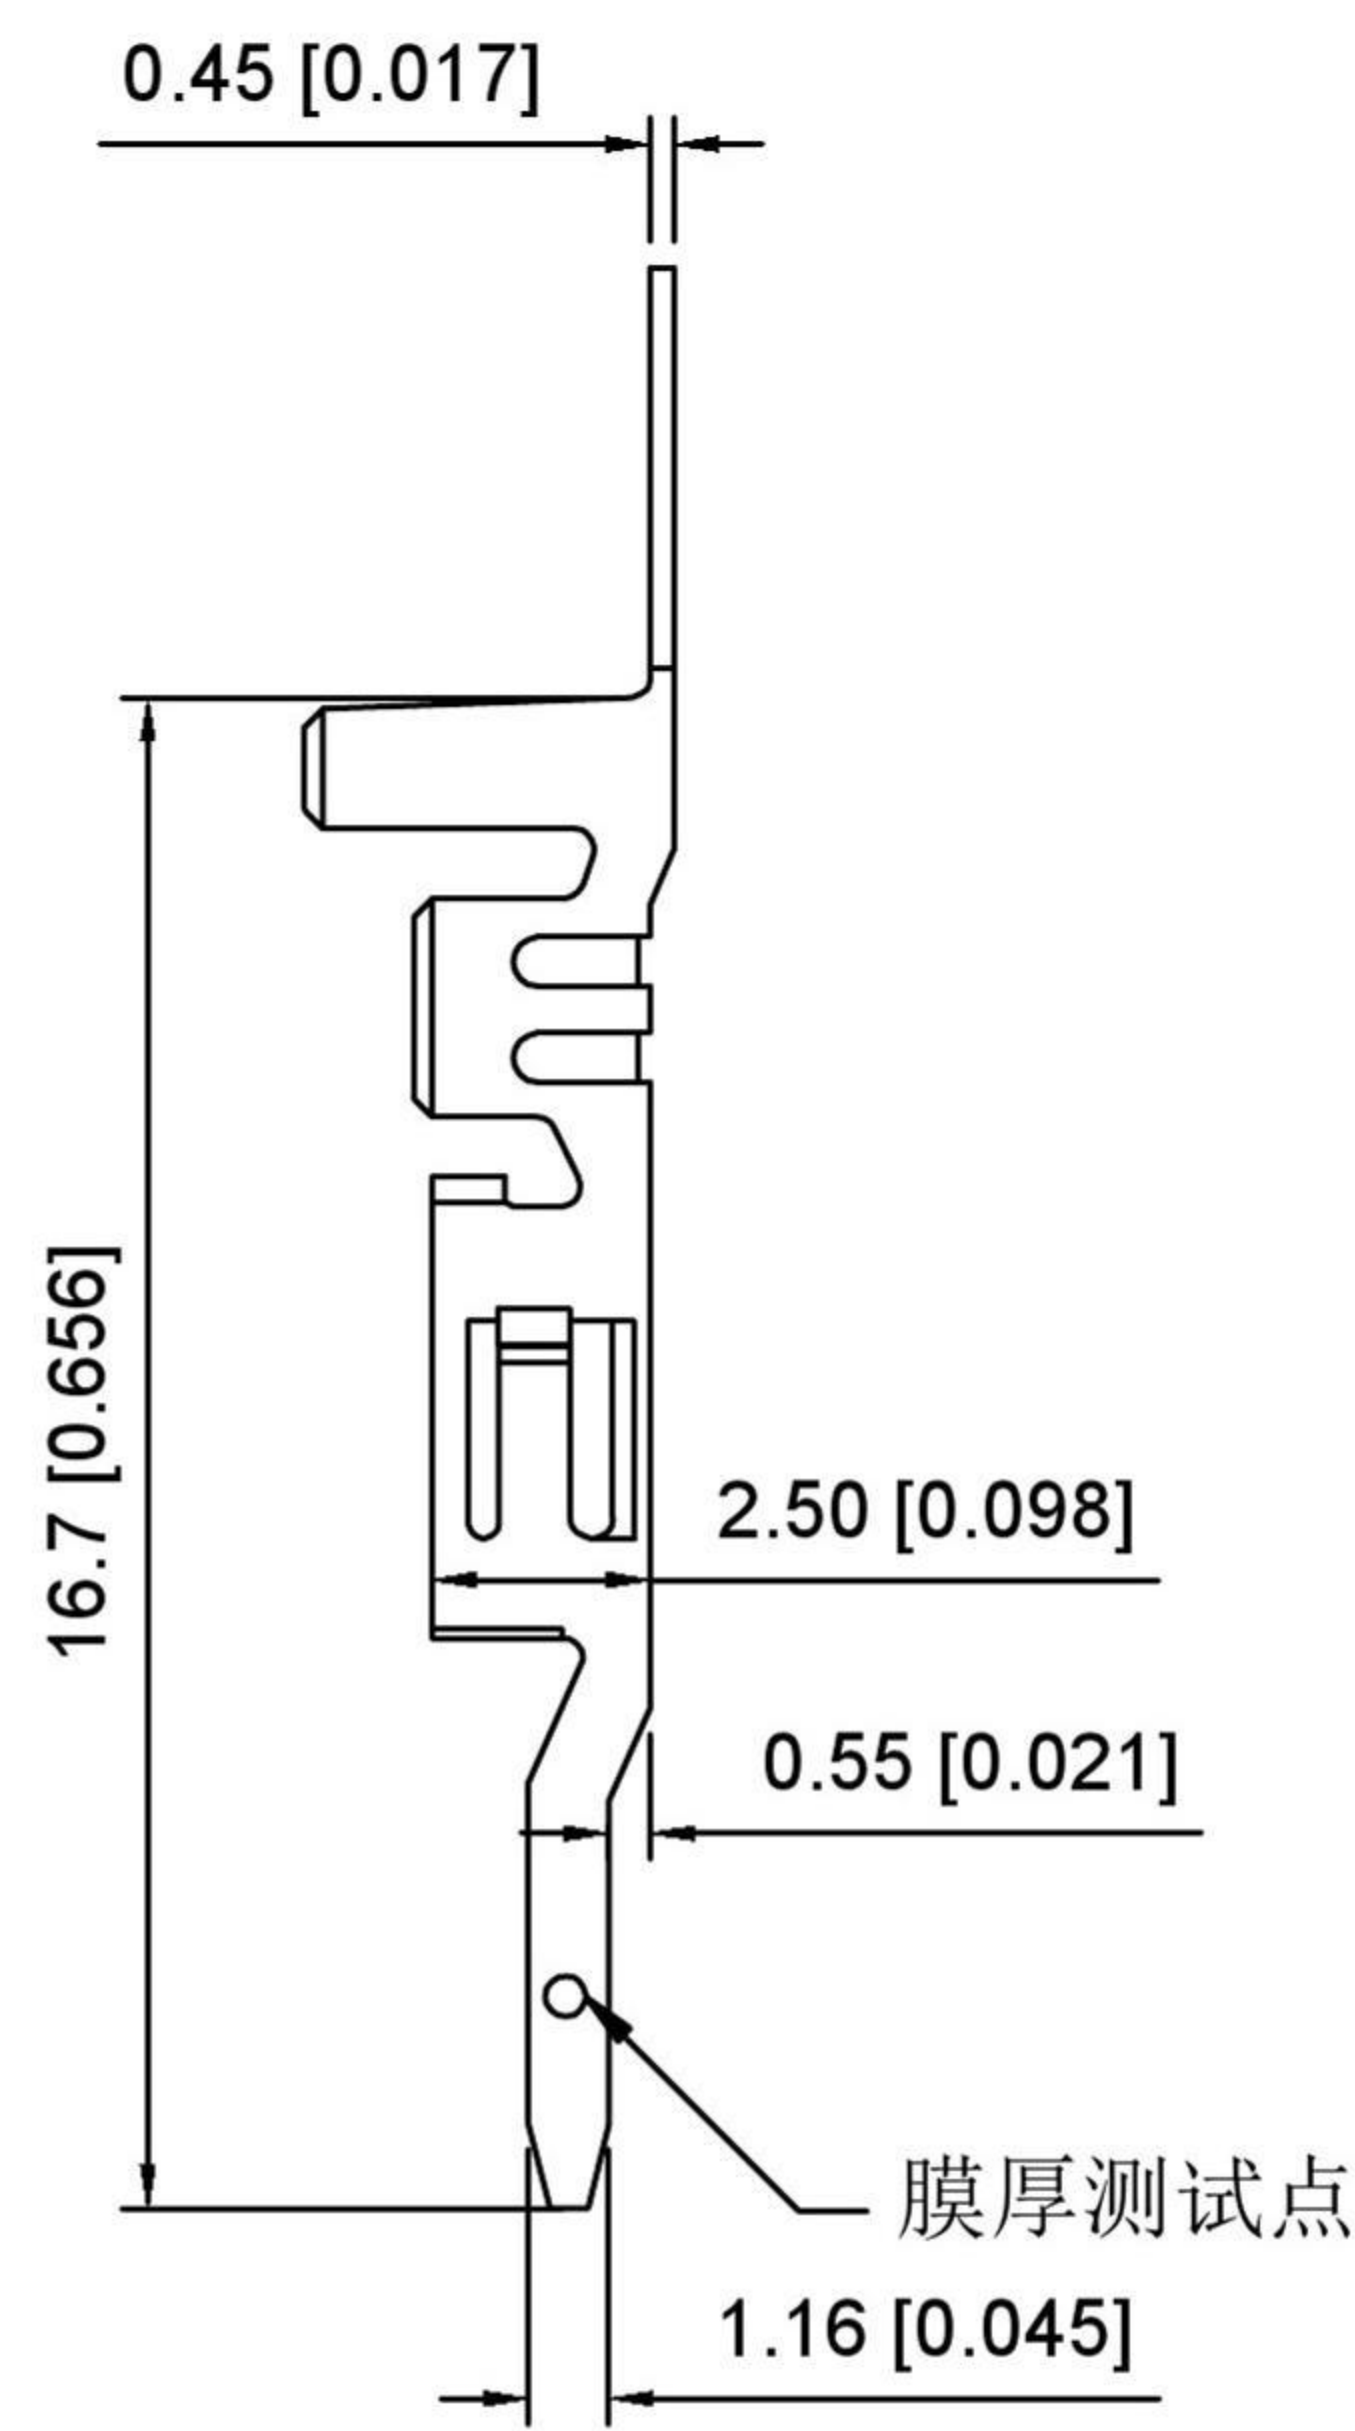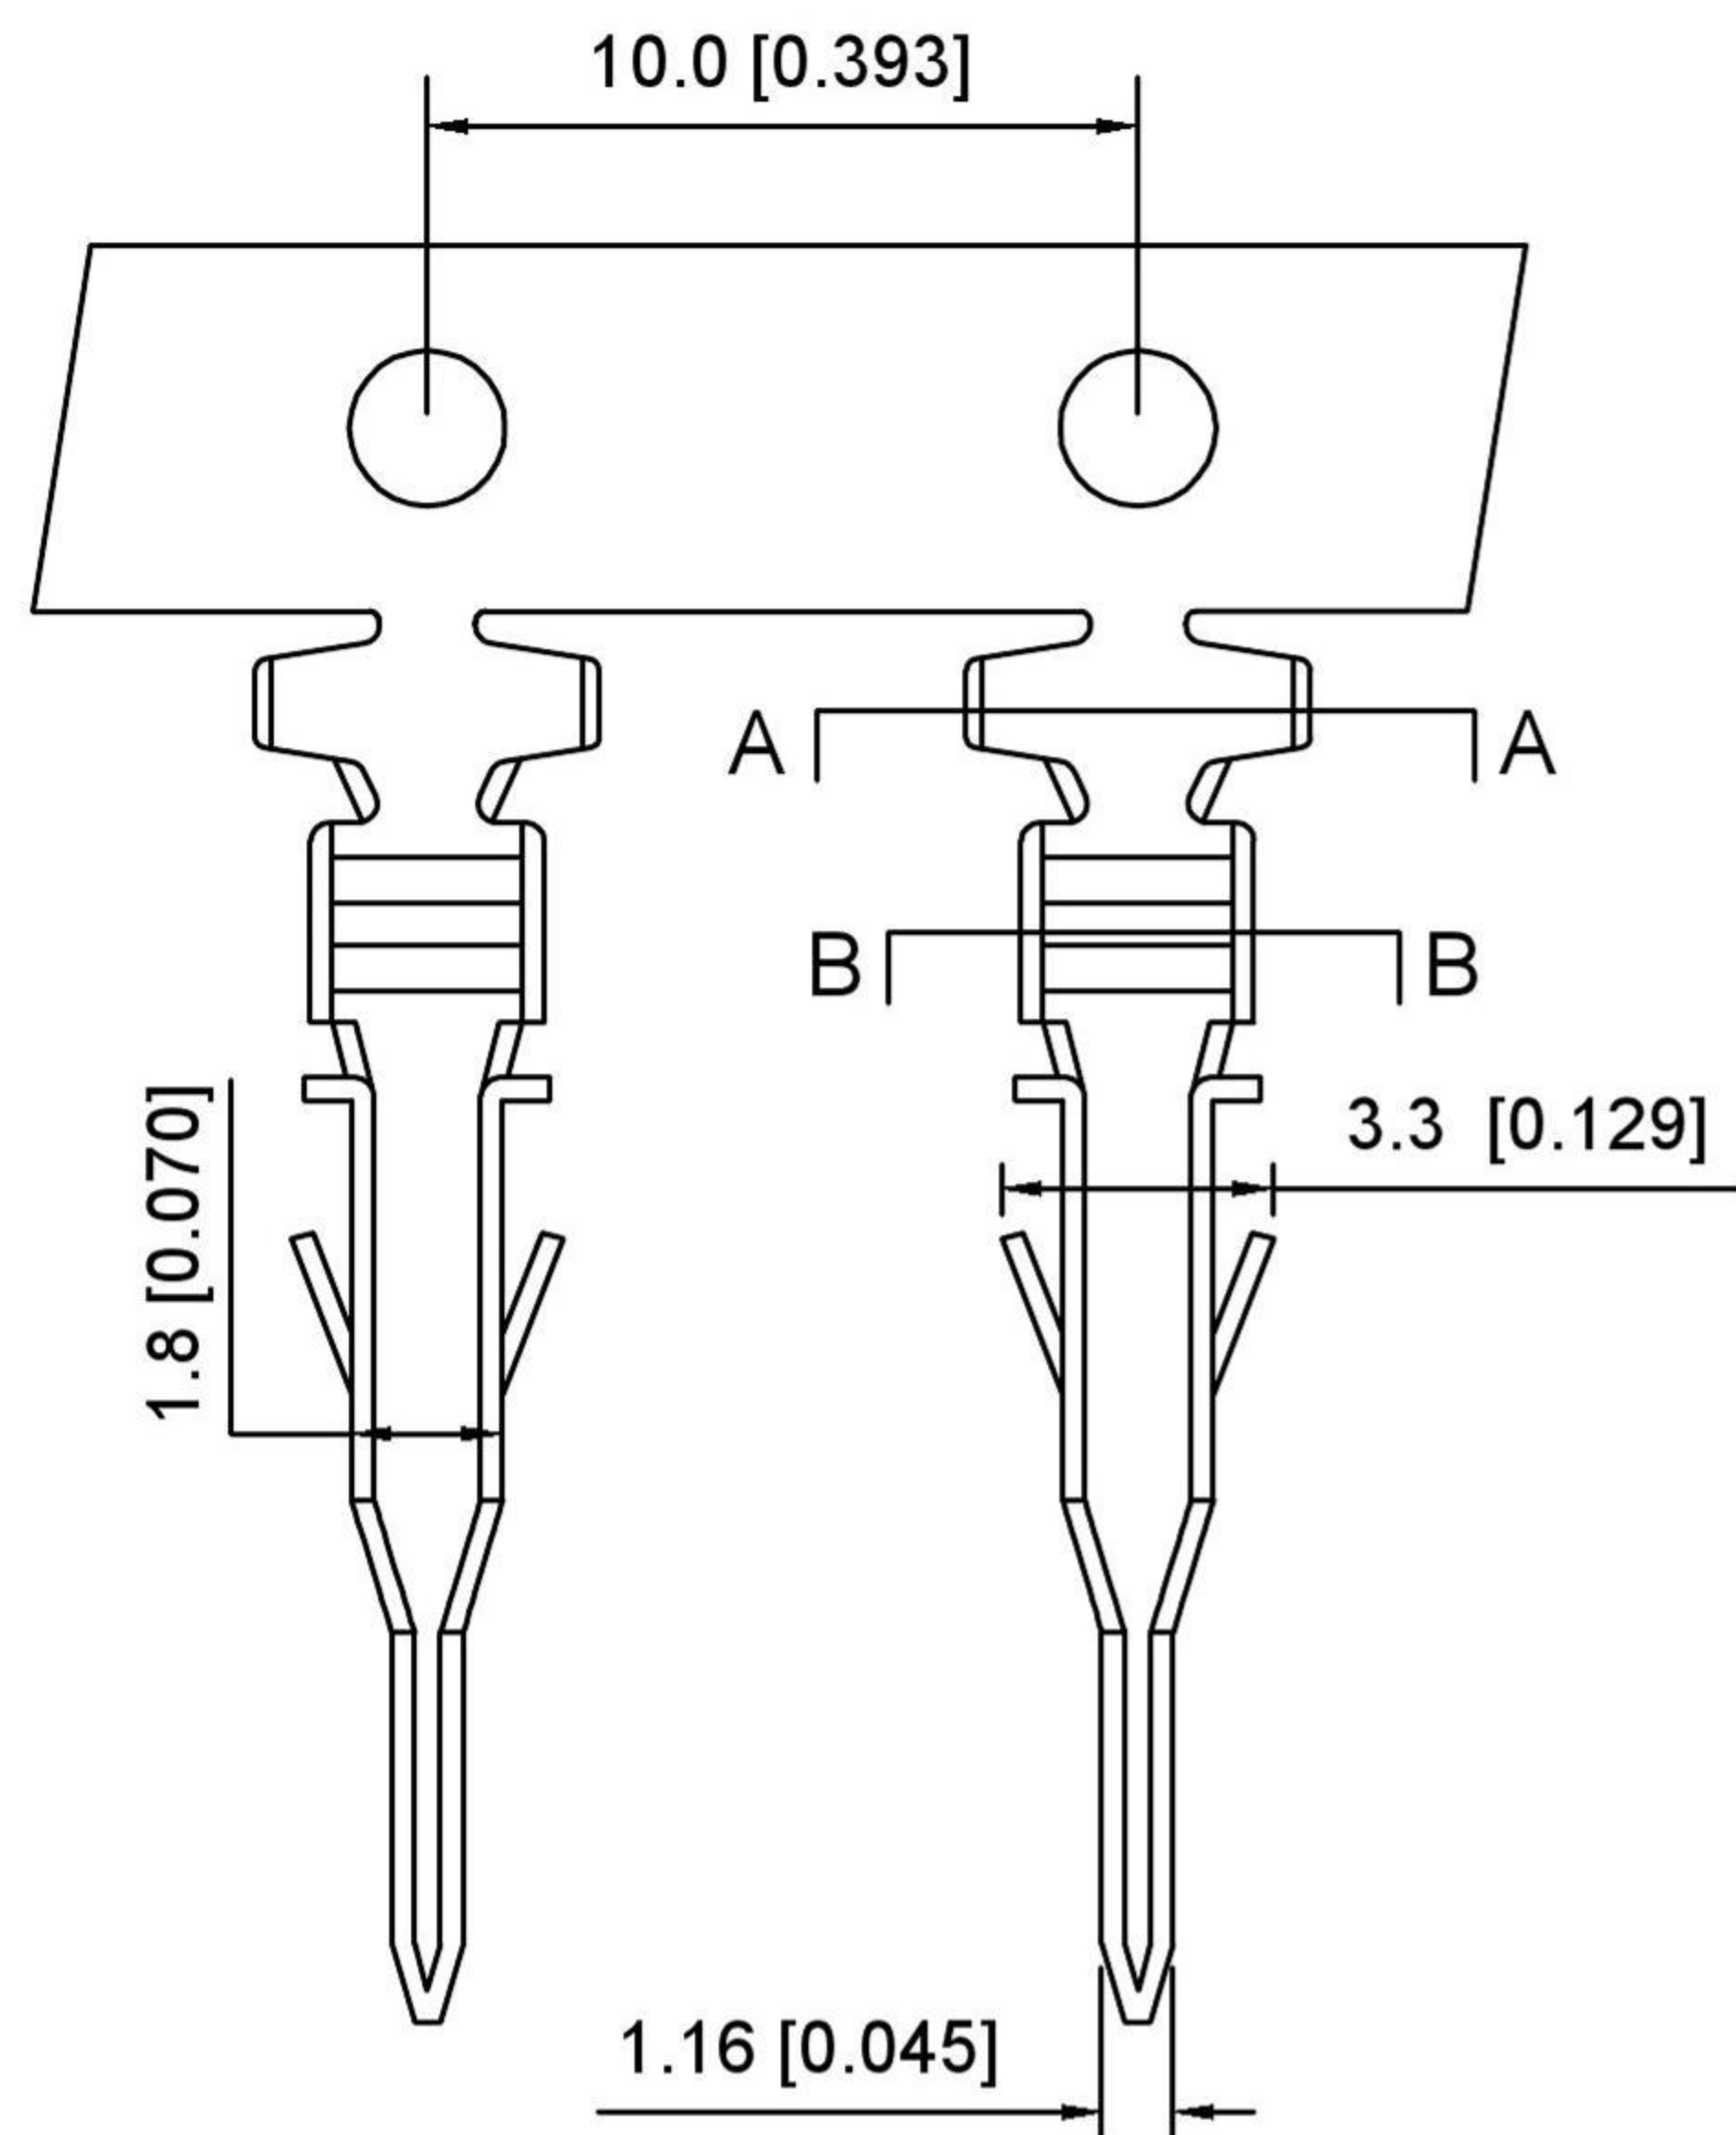






Specifications:
 规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 7A AC/DC
 额定电流: 7A AC/DC
 Withstanding voltage: 500V AC/minute
 耐受电压: 500V AC/分钟
 Temperature range: -25°C~+85°C
 温度范围: -40°C~+105°C
 Insulation resistance: 1000MΩ min
 绝缘电阻: 1000MΩ Min
 Contact resistance: 20mΩ Max
 接触电阻: 20mΩ Max

X9357 T M - B SN -X
 ① ② ③ ④ ⑤ ⑥

- 1. Series No
- 2. Category: T-Terminal
- 3. Category: M-Male Terminal
- 4. Material: B-Brass
- 5. Plating: SN-Tin Plated
- 6. Special No: Blank-Low Feet
H-High Feet

X9357TM-BSN	Brass	AWG#18~22	X9635HF
X9357TM-BSN-H		AWG#16~22	
PART NO	Material	Wrie Range	Suitable Housing

REVISIONS				ANGULAR	±5°		DSND	SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR	
				L ≤ 4	±0.2		DWN	VIEW:	PART NO.:	
				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:	
				16 < L ≤ 63	±0.4		APPD	SIZE: A4		
DATE				REVISED	APPROVED	UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD		
								WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com									1/1	A0

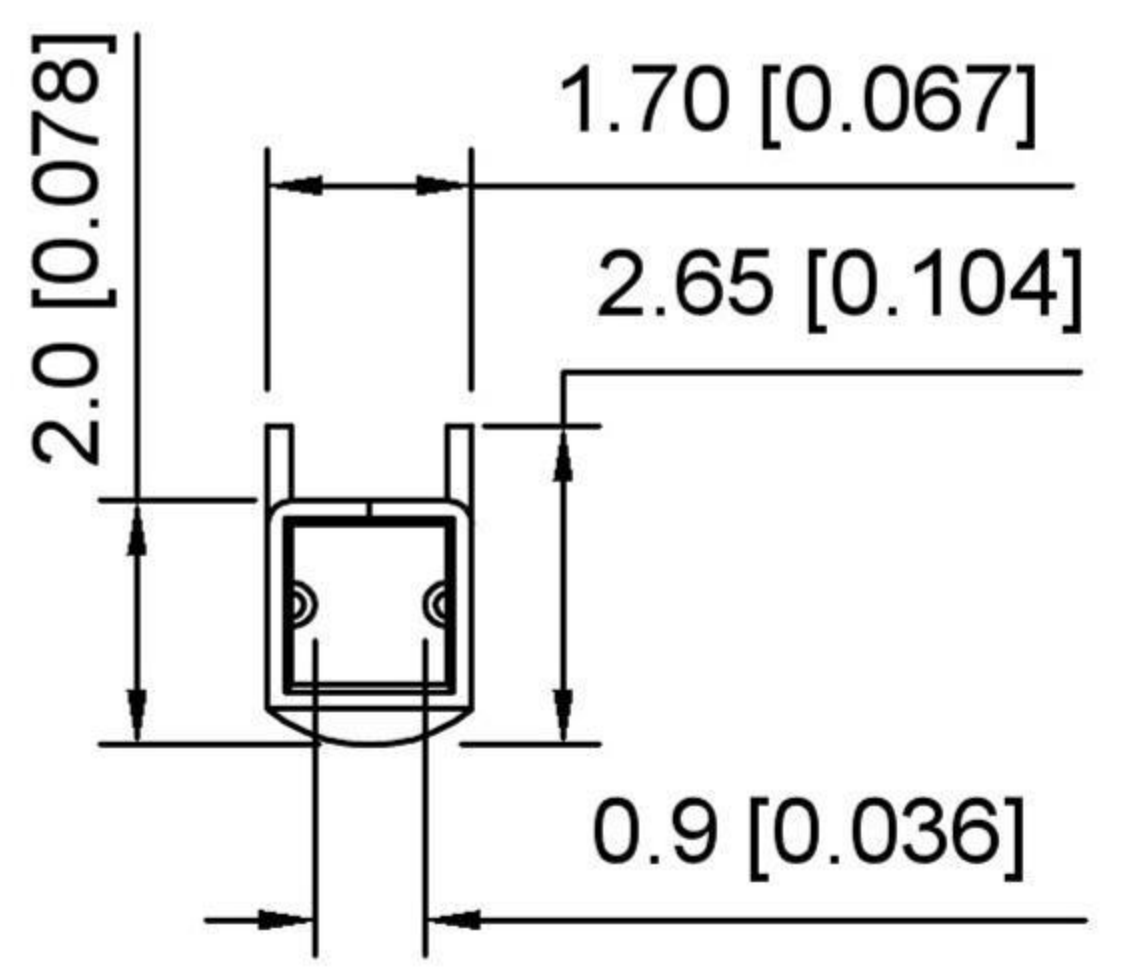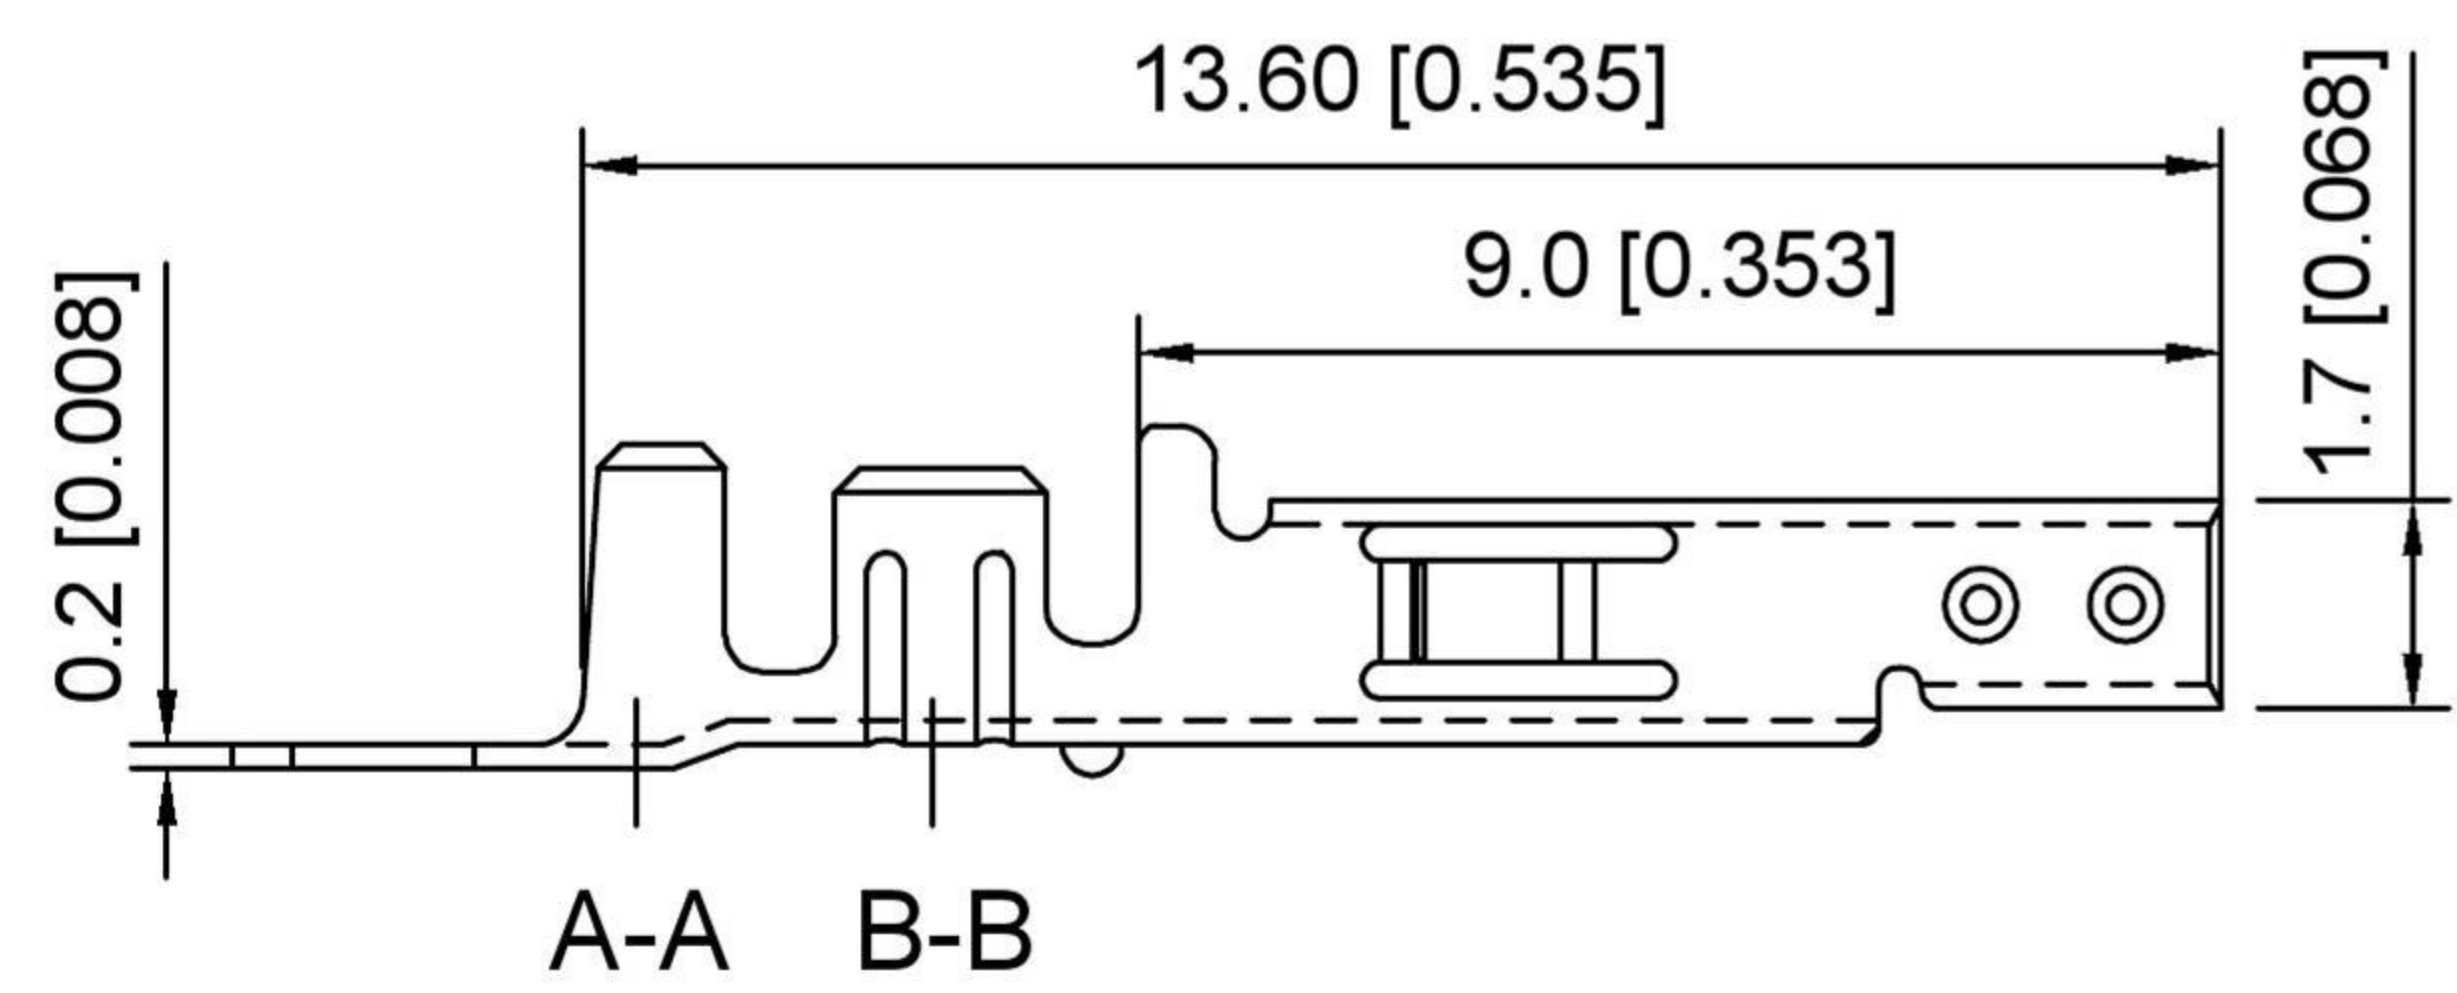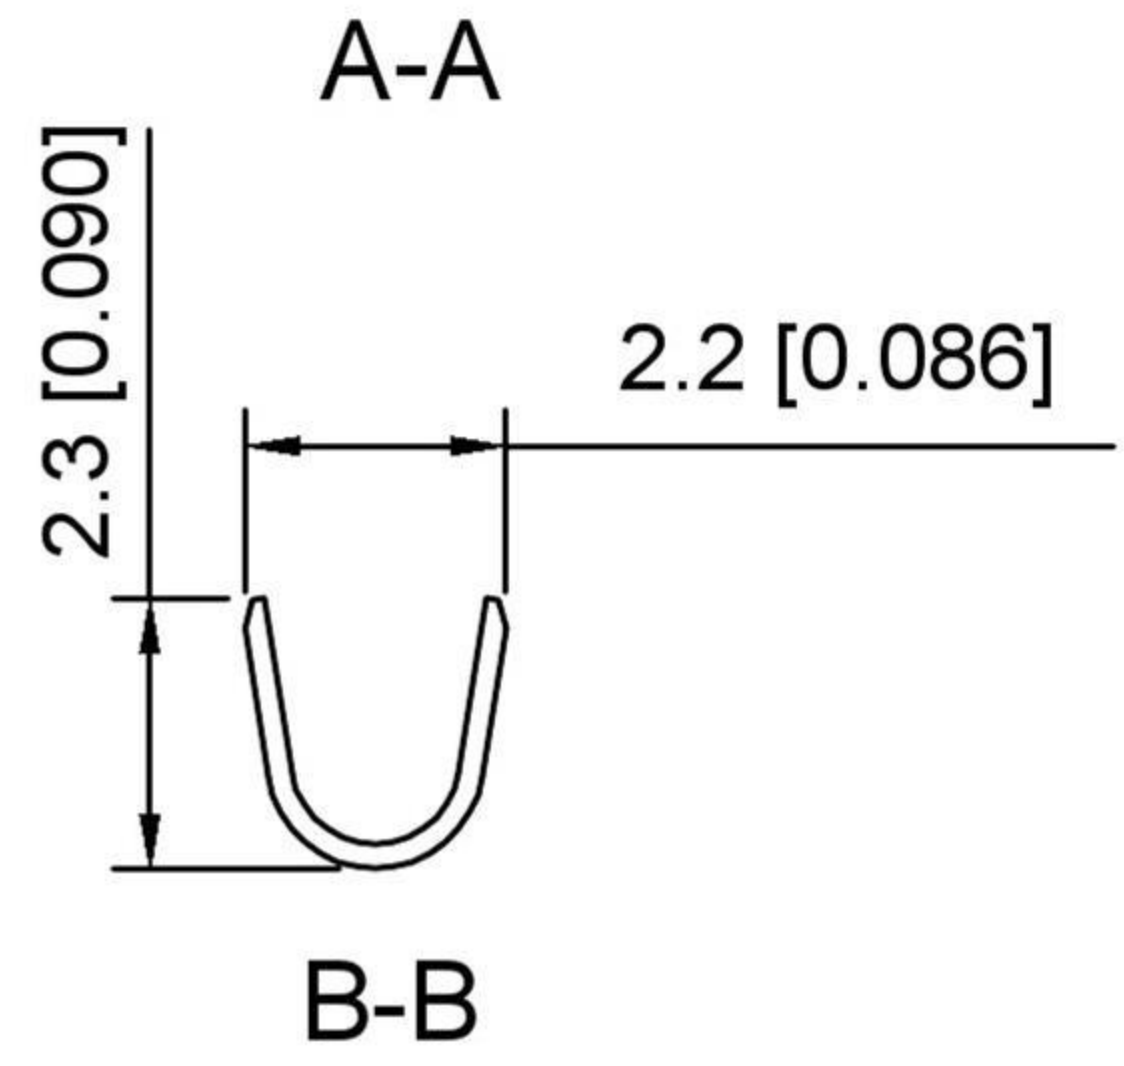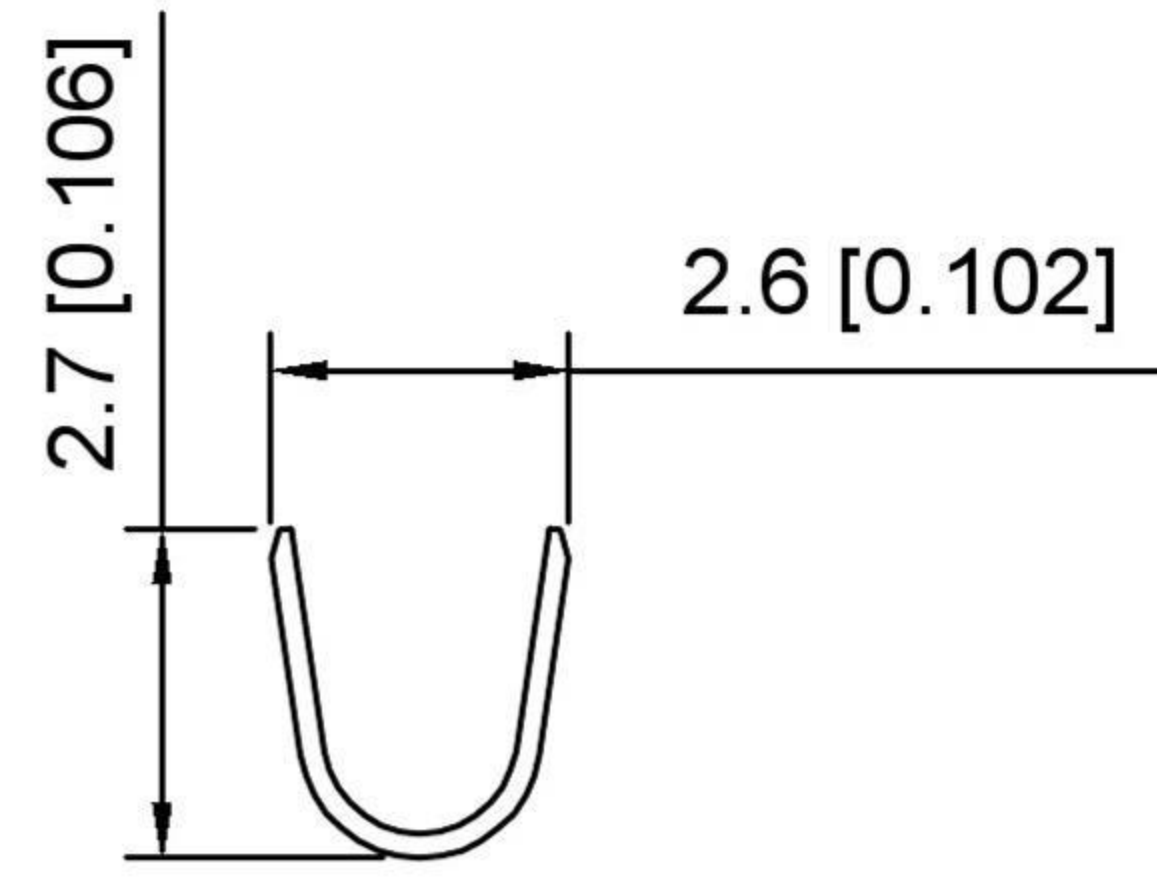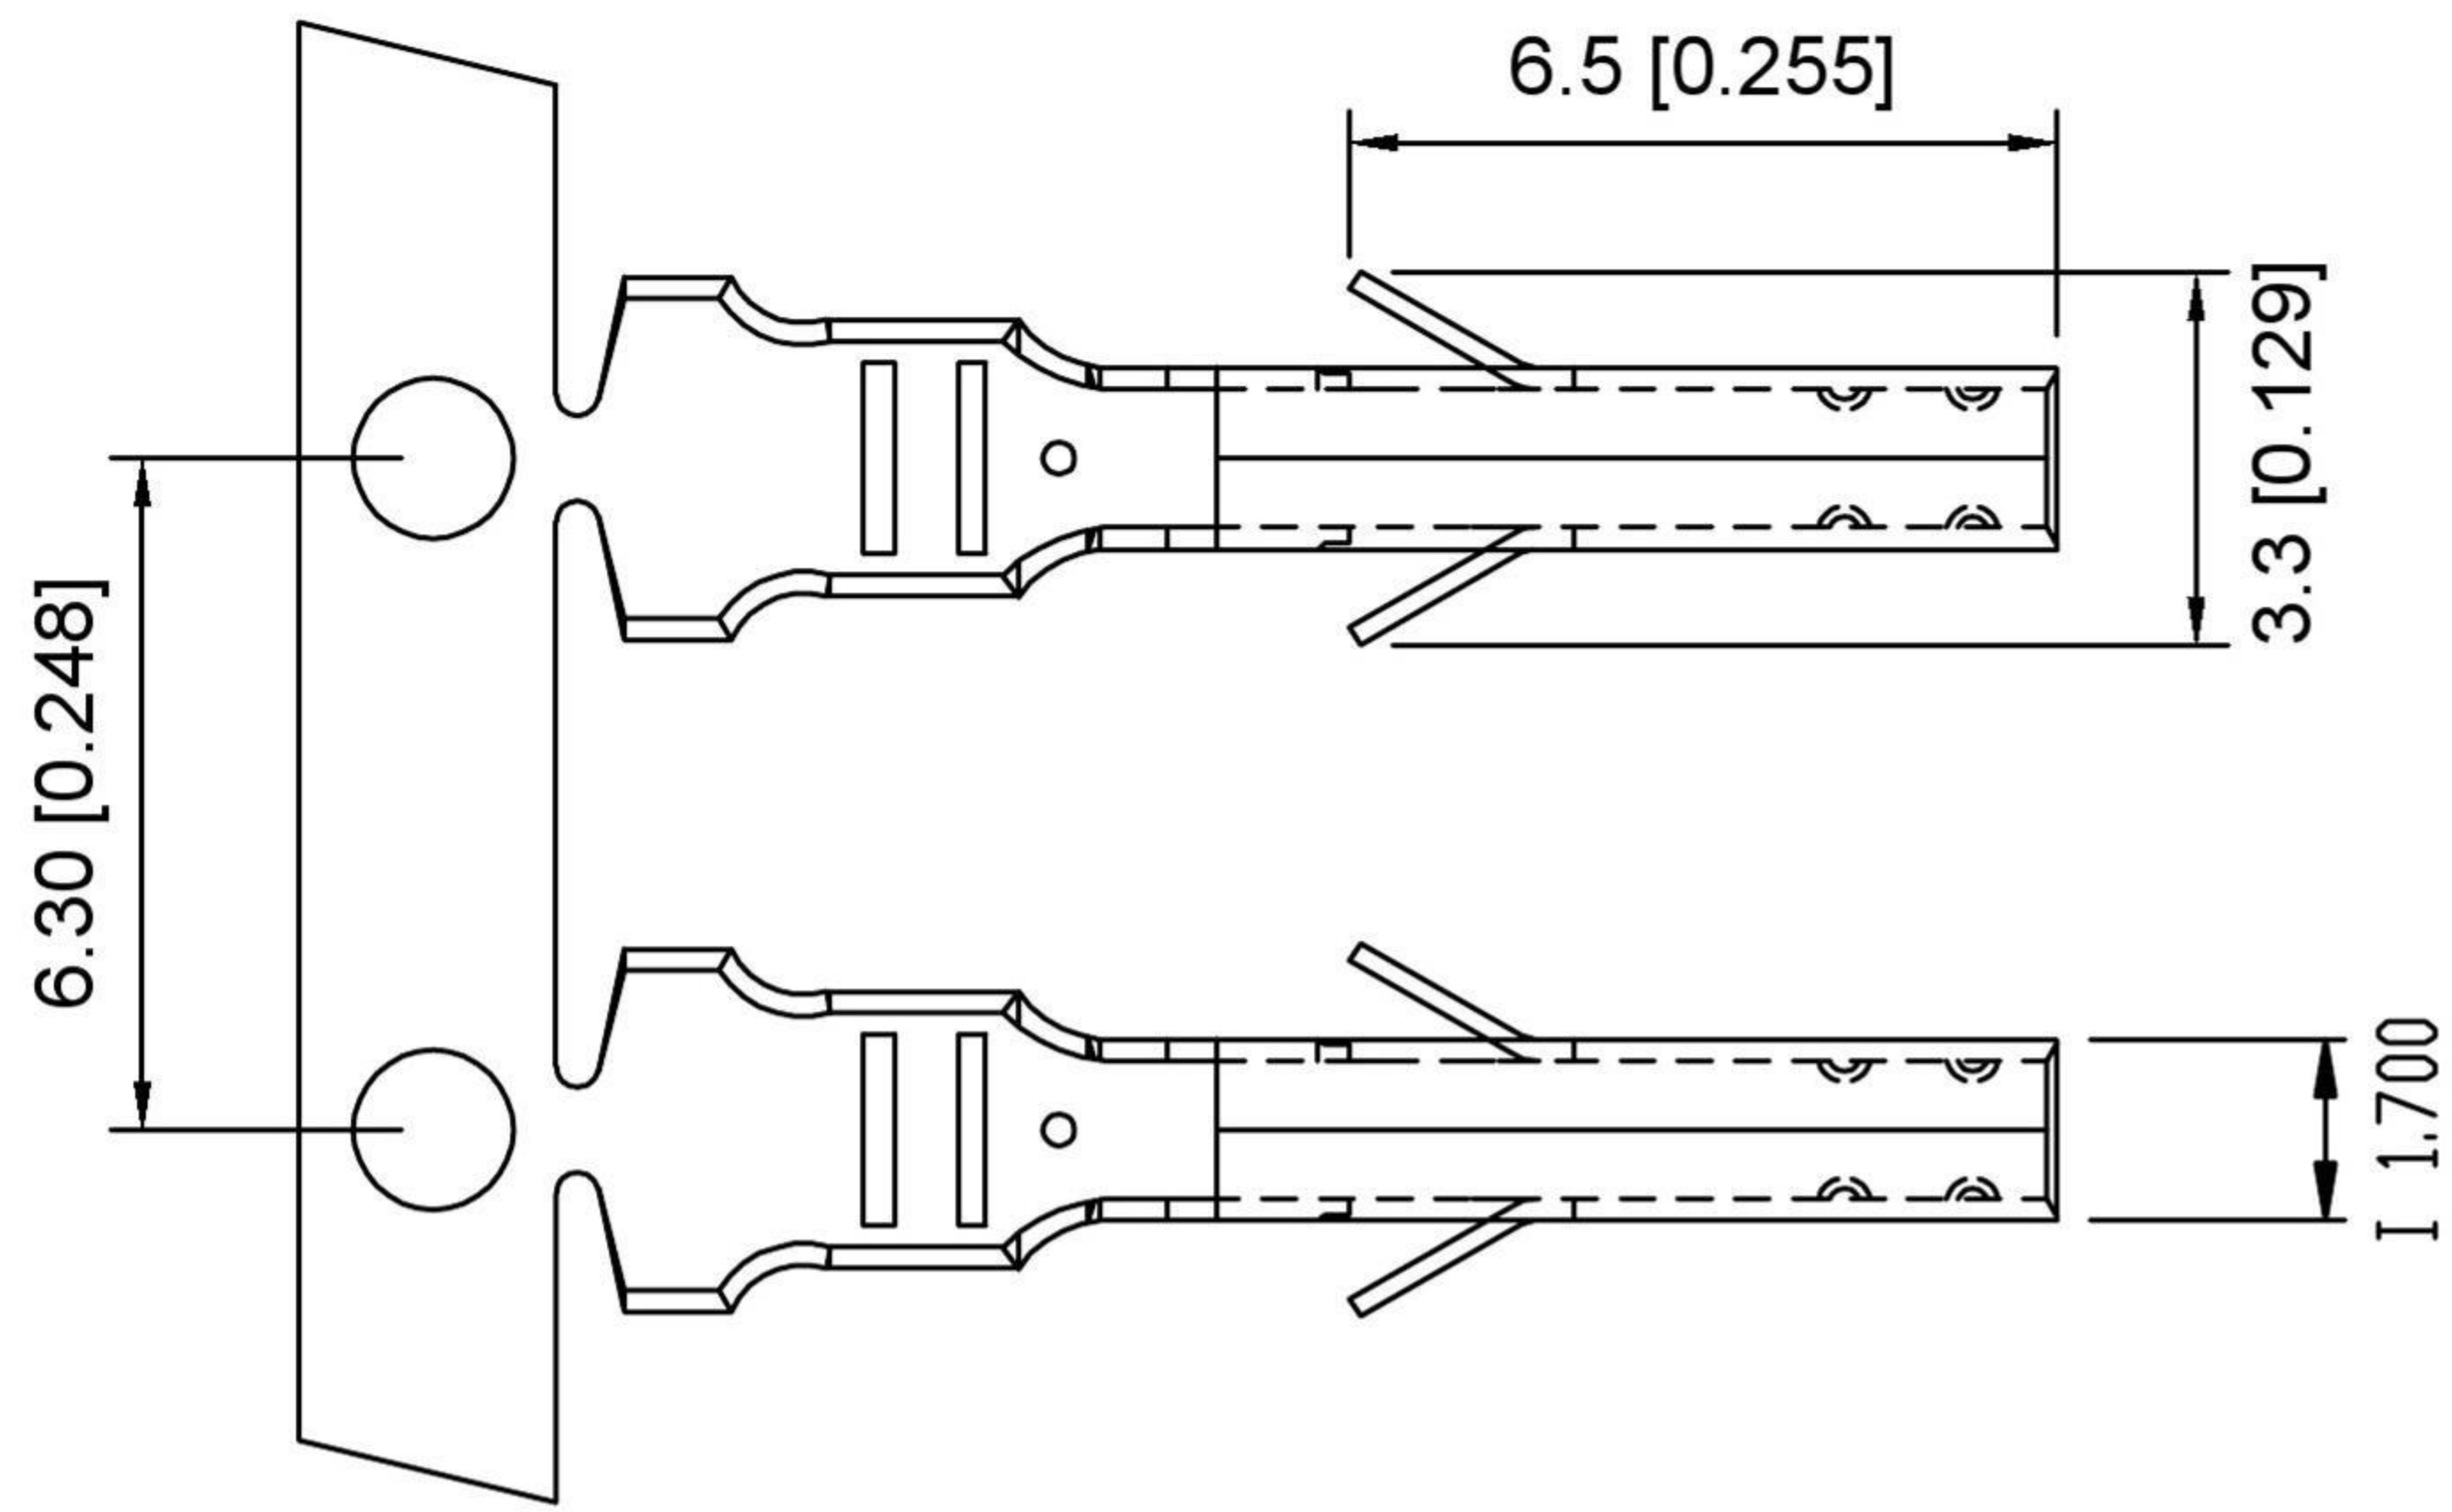








Specifications:
 规格:
 Voltage rating:600V AC/DC
 额定电压: 600V AC/DC
 Current rating:9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage:1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range:-25℃-+85℃
 温度范围: -25℃-+85℃
 Insulation resistance:1000MΩ min
 绝缘电阻: 1000MΩ Min
 Contact resistance:10mΩ Max
 接触电阻: 10mΩ Max

X9357 T F - B SN - M
 ① ② ③ ④ ⑤ ⑥

- 1.Series No
- 2.Category:T-Terminal
- 3.Category:F-Female Terminal
- 4.Material:B-Brass
- 5.Plating:SN-Tin Plated
- 6.Special No:M-Lower the foot

X9357TF-BSN-M	Brass	AWG#20	X9357H
PART NO	Material	Wire Range	Suitable Housing

REVISIONS				ANGULAR	±5°		DSND	SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR				
DATE				L ≤ 4	±0.2		DWN	VIEW: 	PART NO.:				
REVISED				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:				
APPROVED				16 < L ≤ 63	±0.4		APPD	SIZE: A4					
				L > 63	±0.5	UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0	

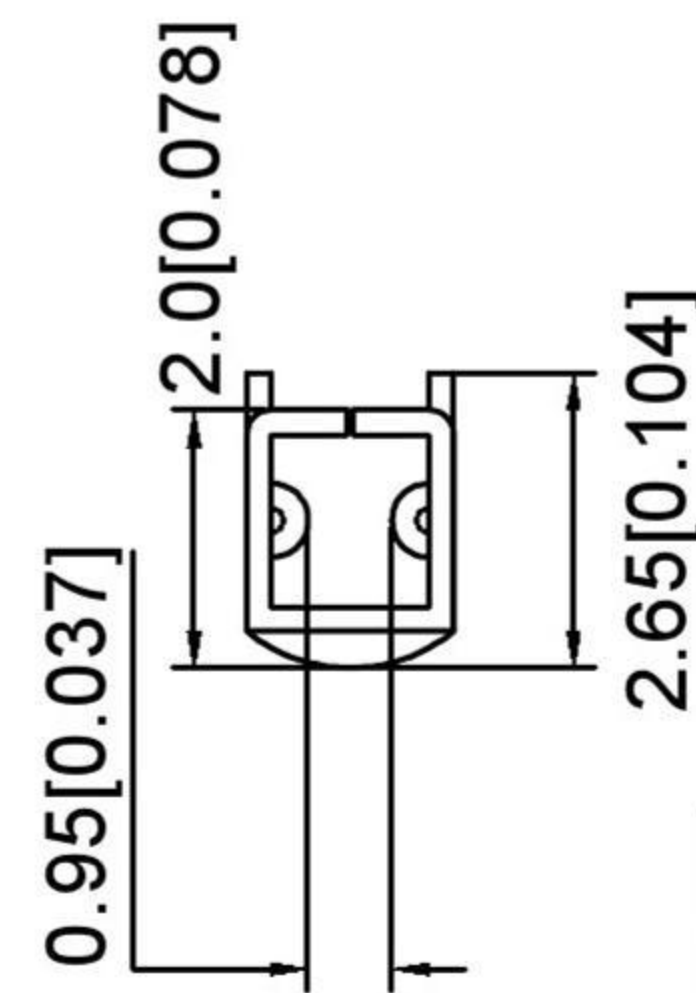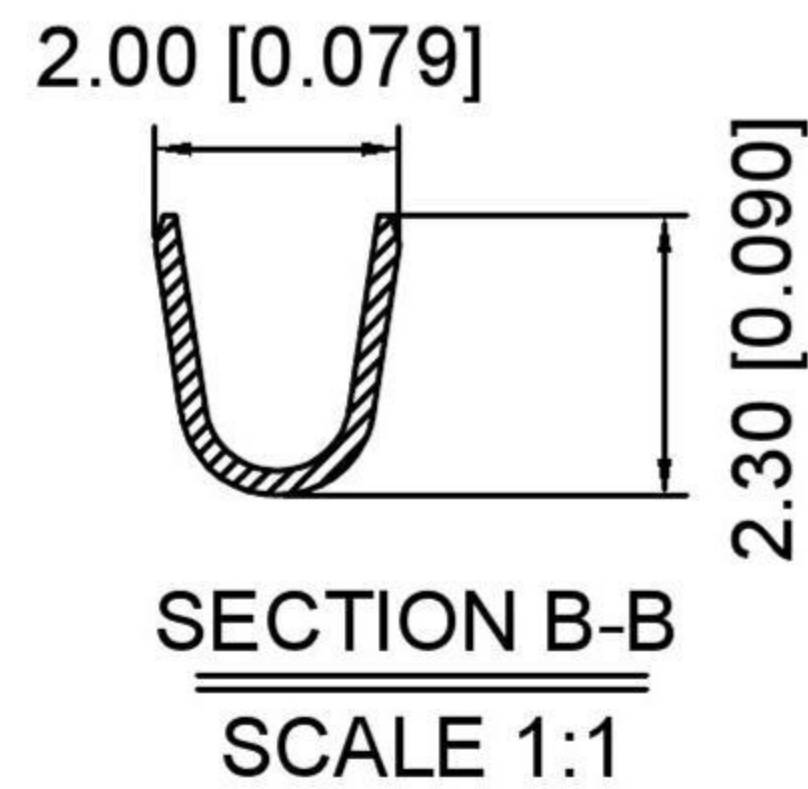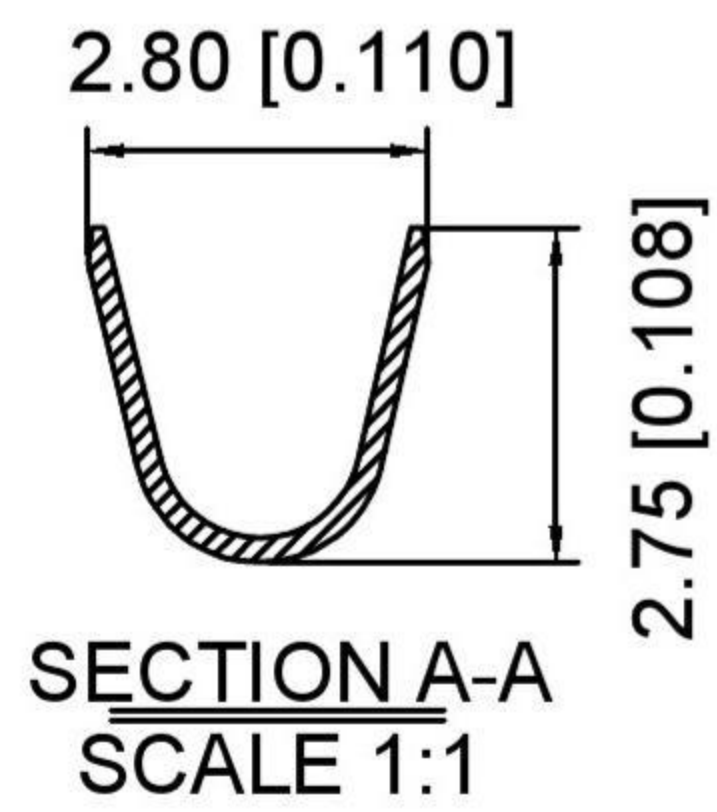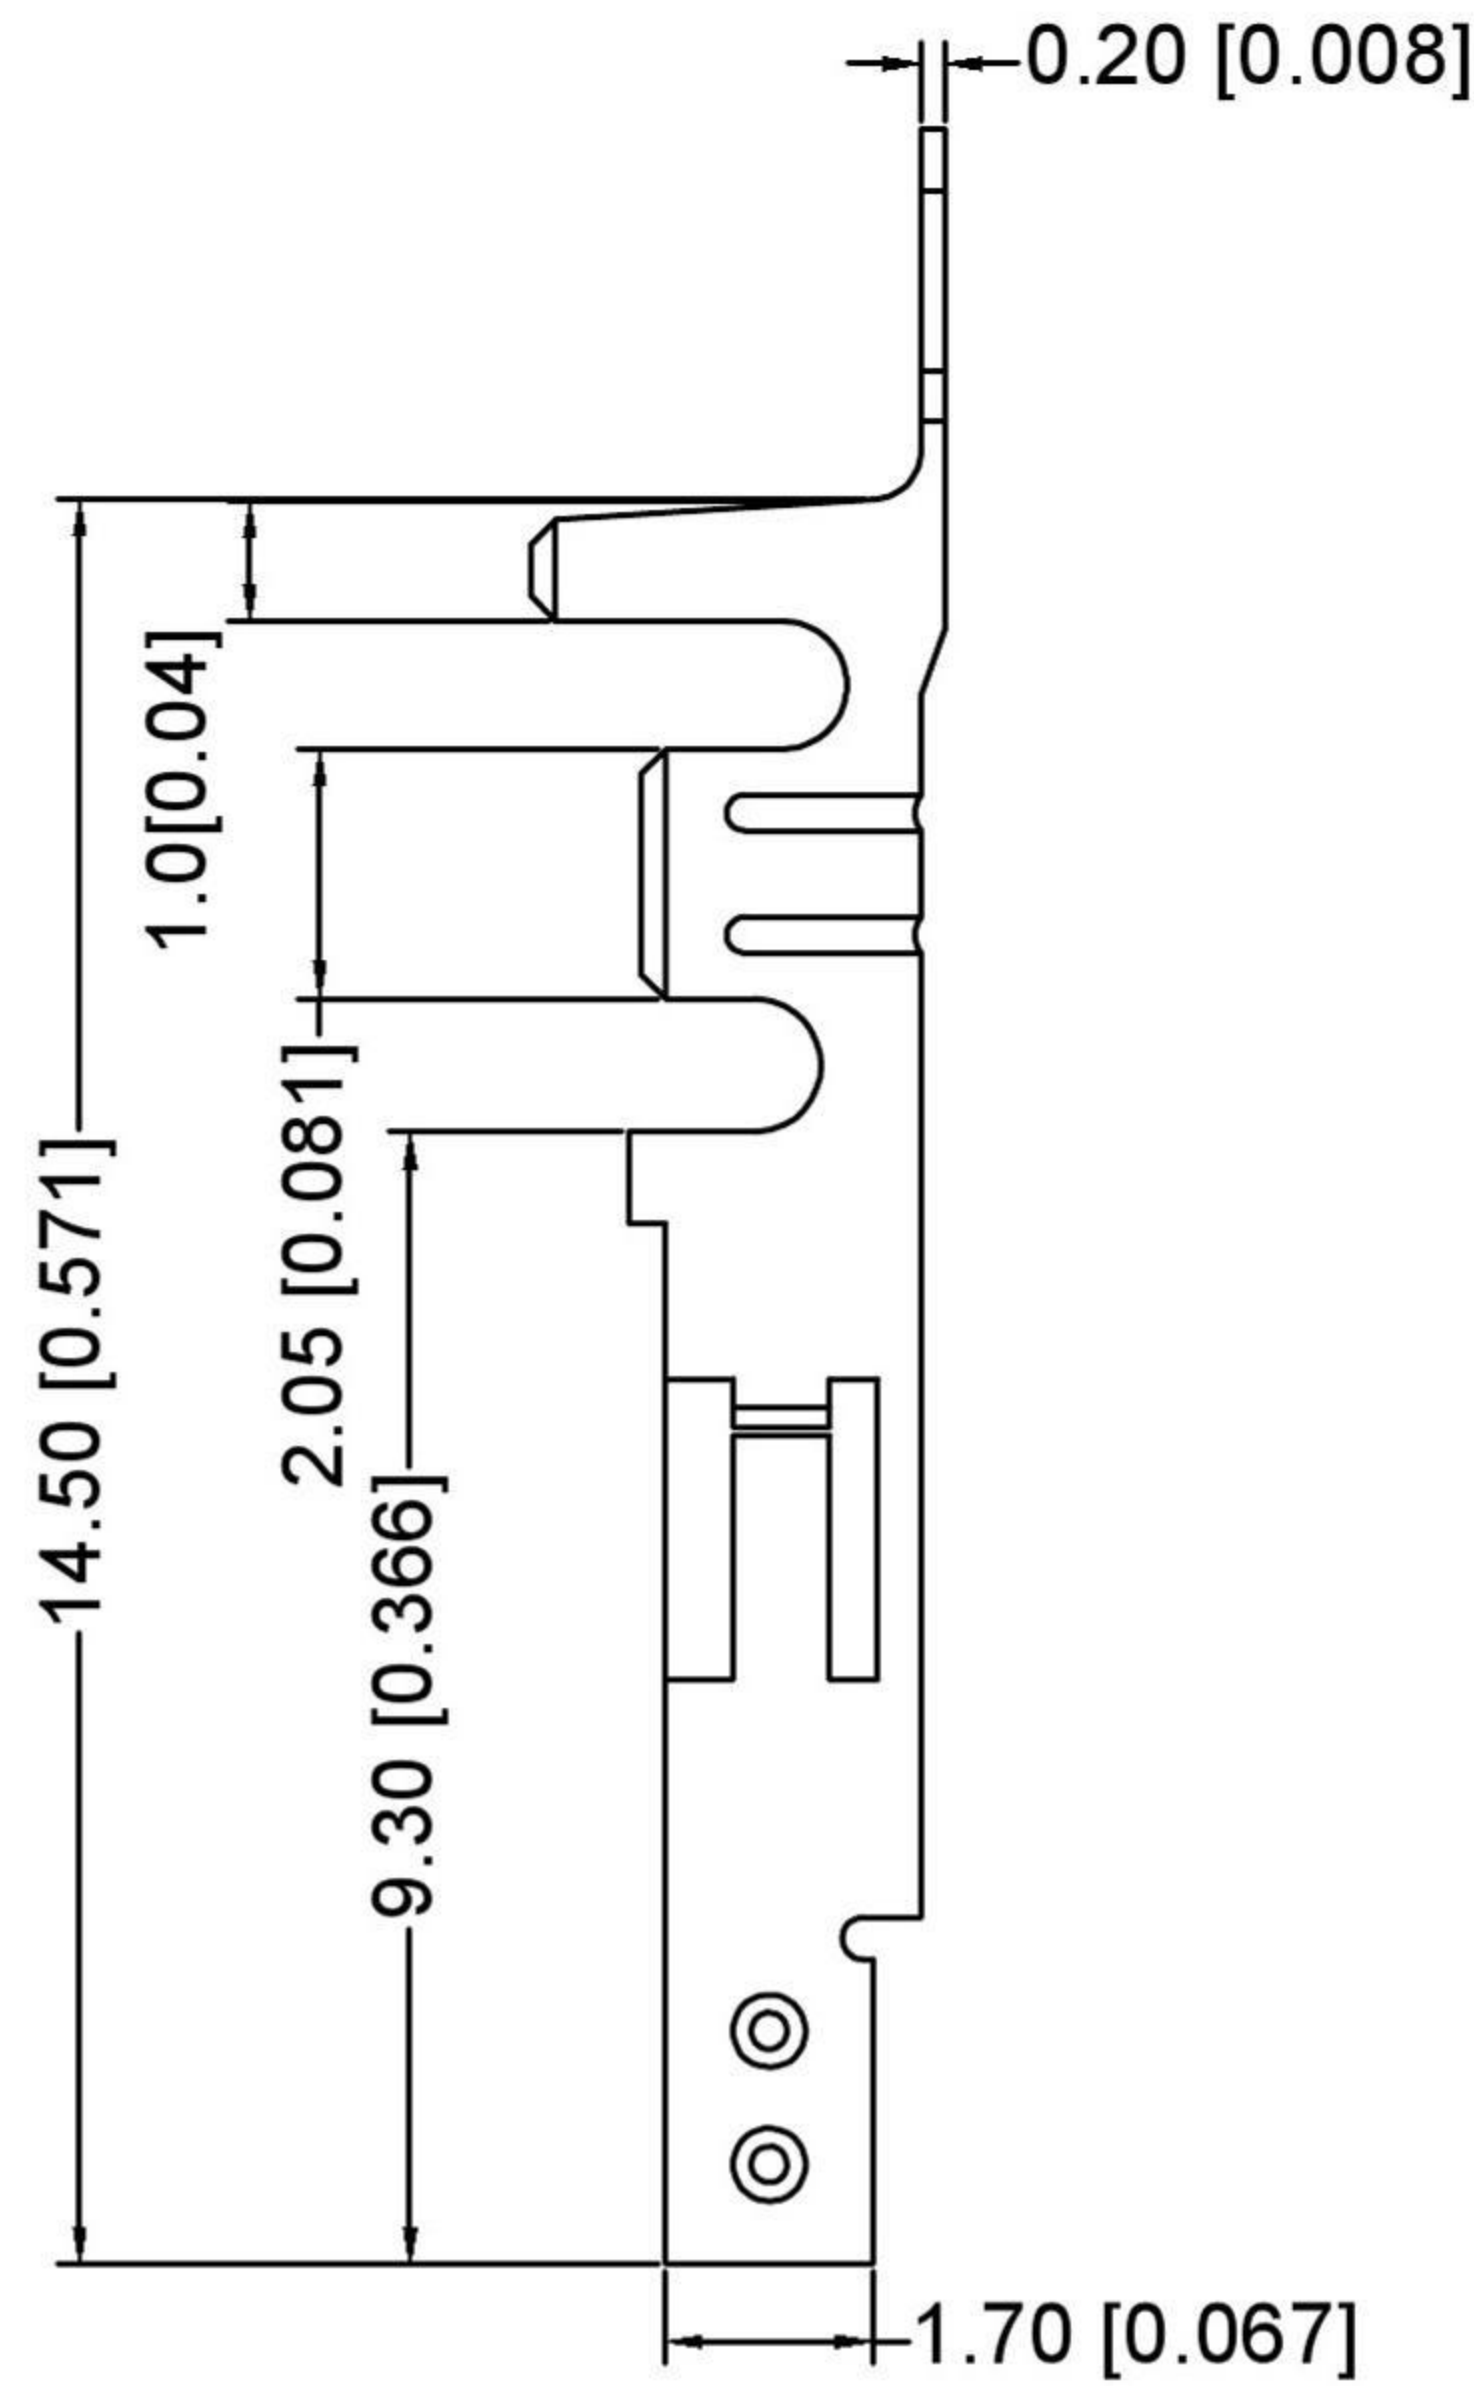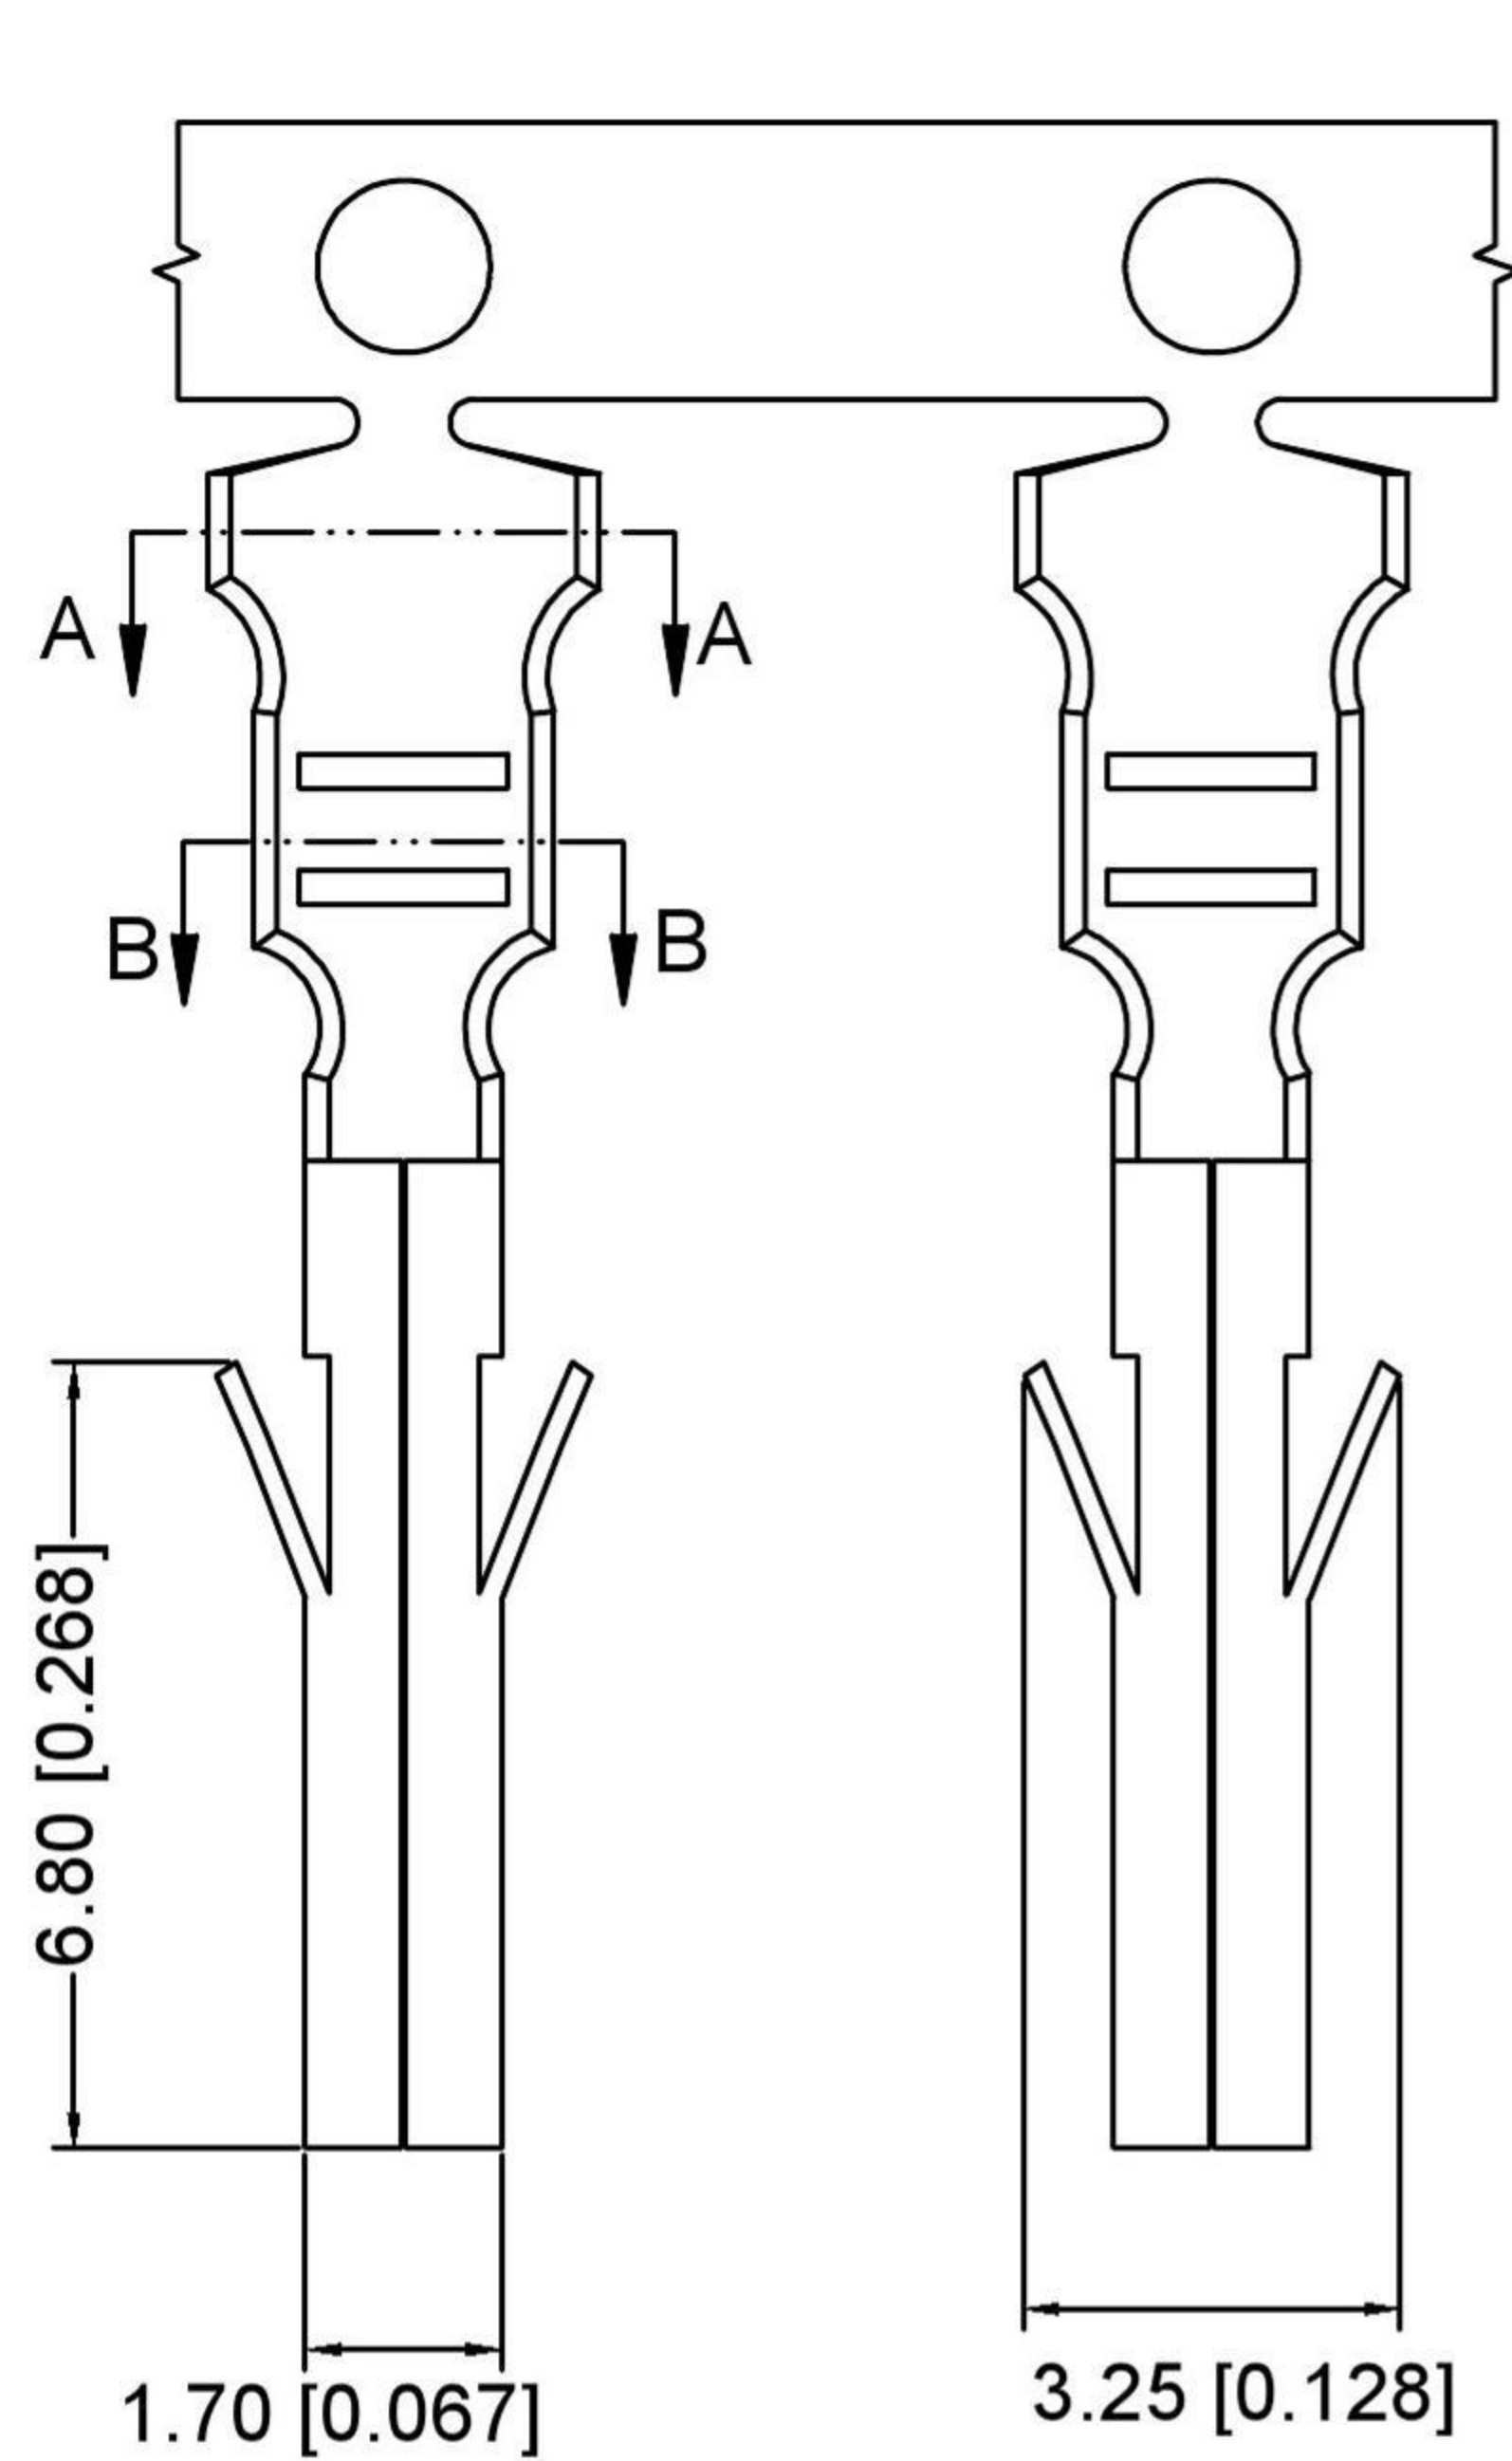

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Current rating:9A AC/DC

额定电流: 9A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤10mΩ

接触电阻: ≤10mΩ

After environmental testing:≤20mΩ

环境测试后: ≤20兆欧

X9357 T F- X SN X-L
① ②③ ④ ⑤ ⑥⑦

1 Series Number

2 Category: T-terminal

3 Shape:F-Female

4 Material:B-Brass;P-Phosphor Bronze

5 Plating style: SN-Bright tin plating





6 Plating method:

Blank-Stamping before plating;

7 Special No: L-Normal Leads

X9357TF-PSN-L	Phospher Bronze	AWG#18-24	12.10mm(Max)	Stamping Before Plating :30u" MIN. N;/0u"Sn MIN	X9357HM
X9357TF-BSN-L	Brass				
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable

REVISIONS				ANGULAR	±5°		DSND	SCALE: N/A	MODEL TYPE:
DATE				L ≤ 4	±0.2		DWN	VIEW:	BOARD TO BOARD CONNECTOR
REVISED				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	PART NO.:
APPROVED				16 < L ≤ 63	±0.4		APPD	SIZE: A4	DWG NO.:
				L > 63	±0.5				
UNSPECIFIED TOLERANCES				DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com								1/1	A0

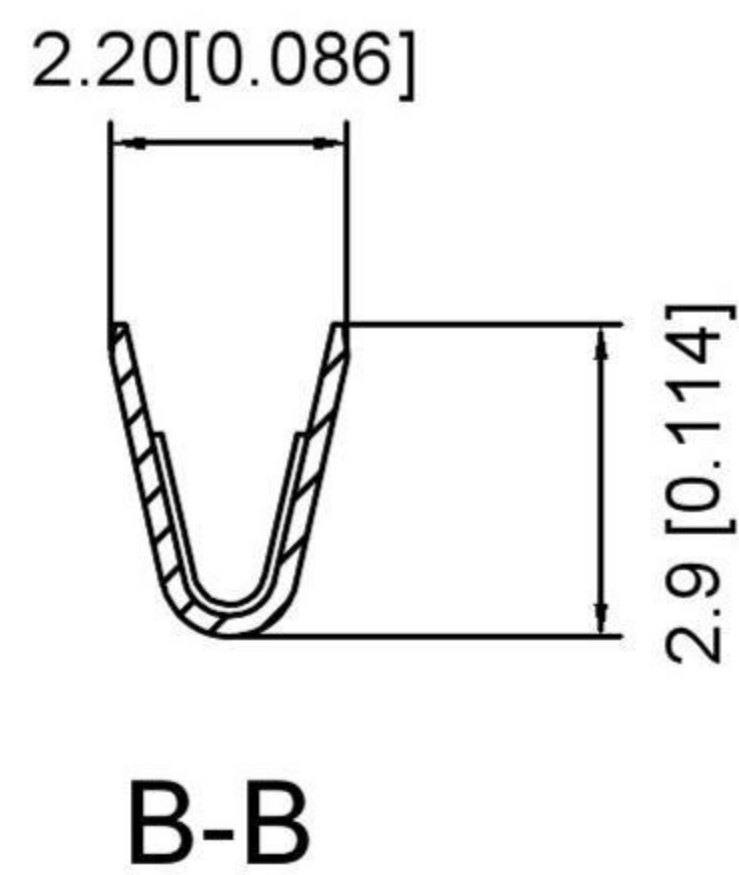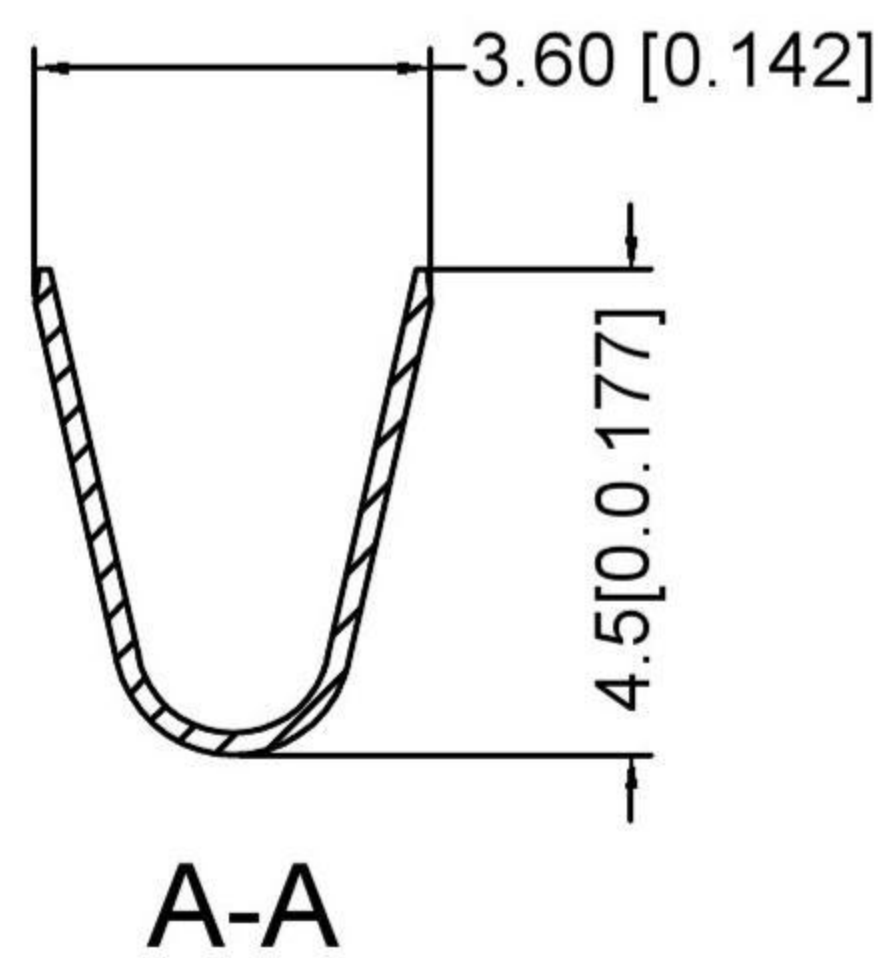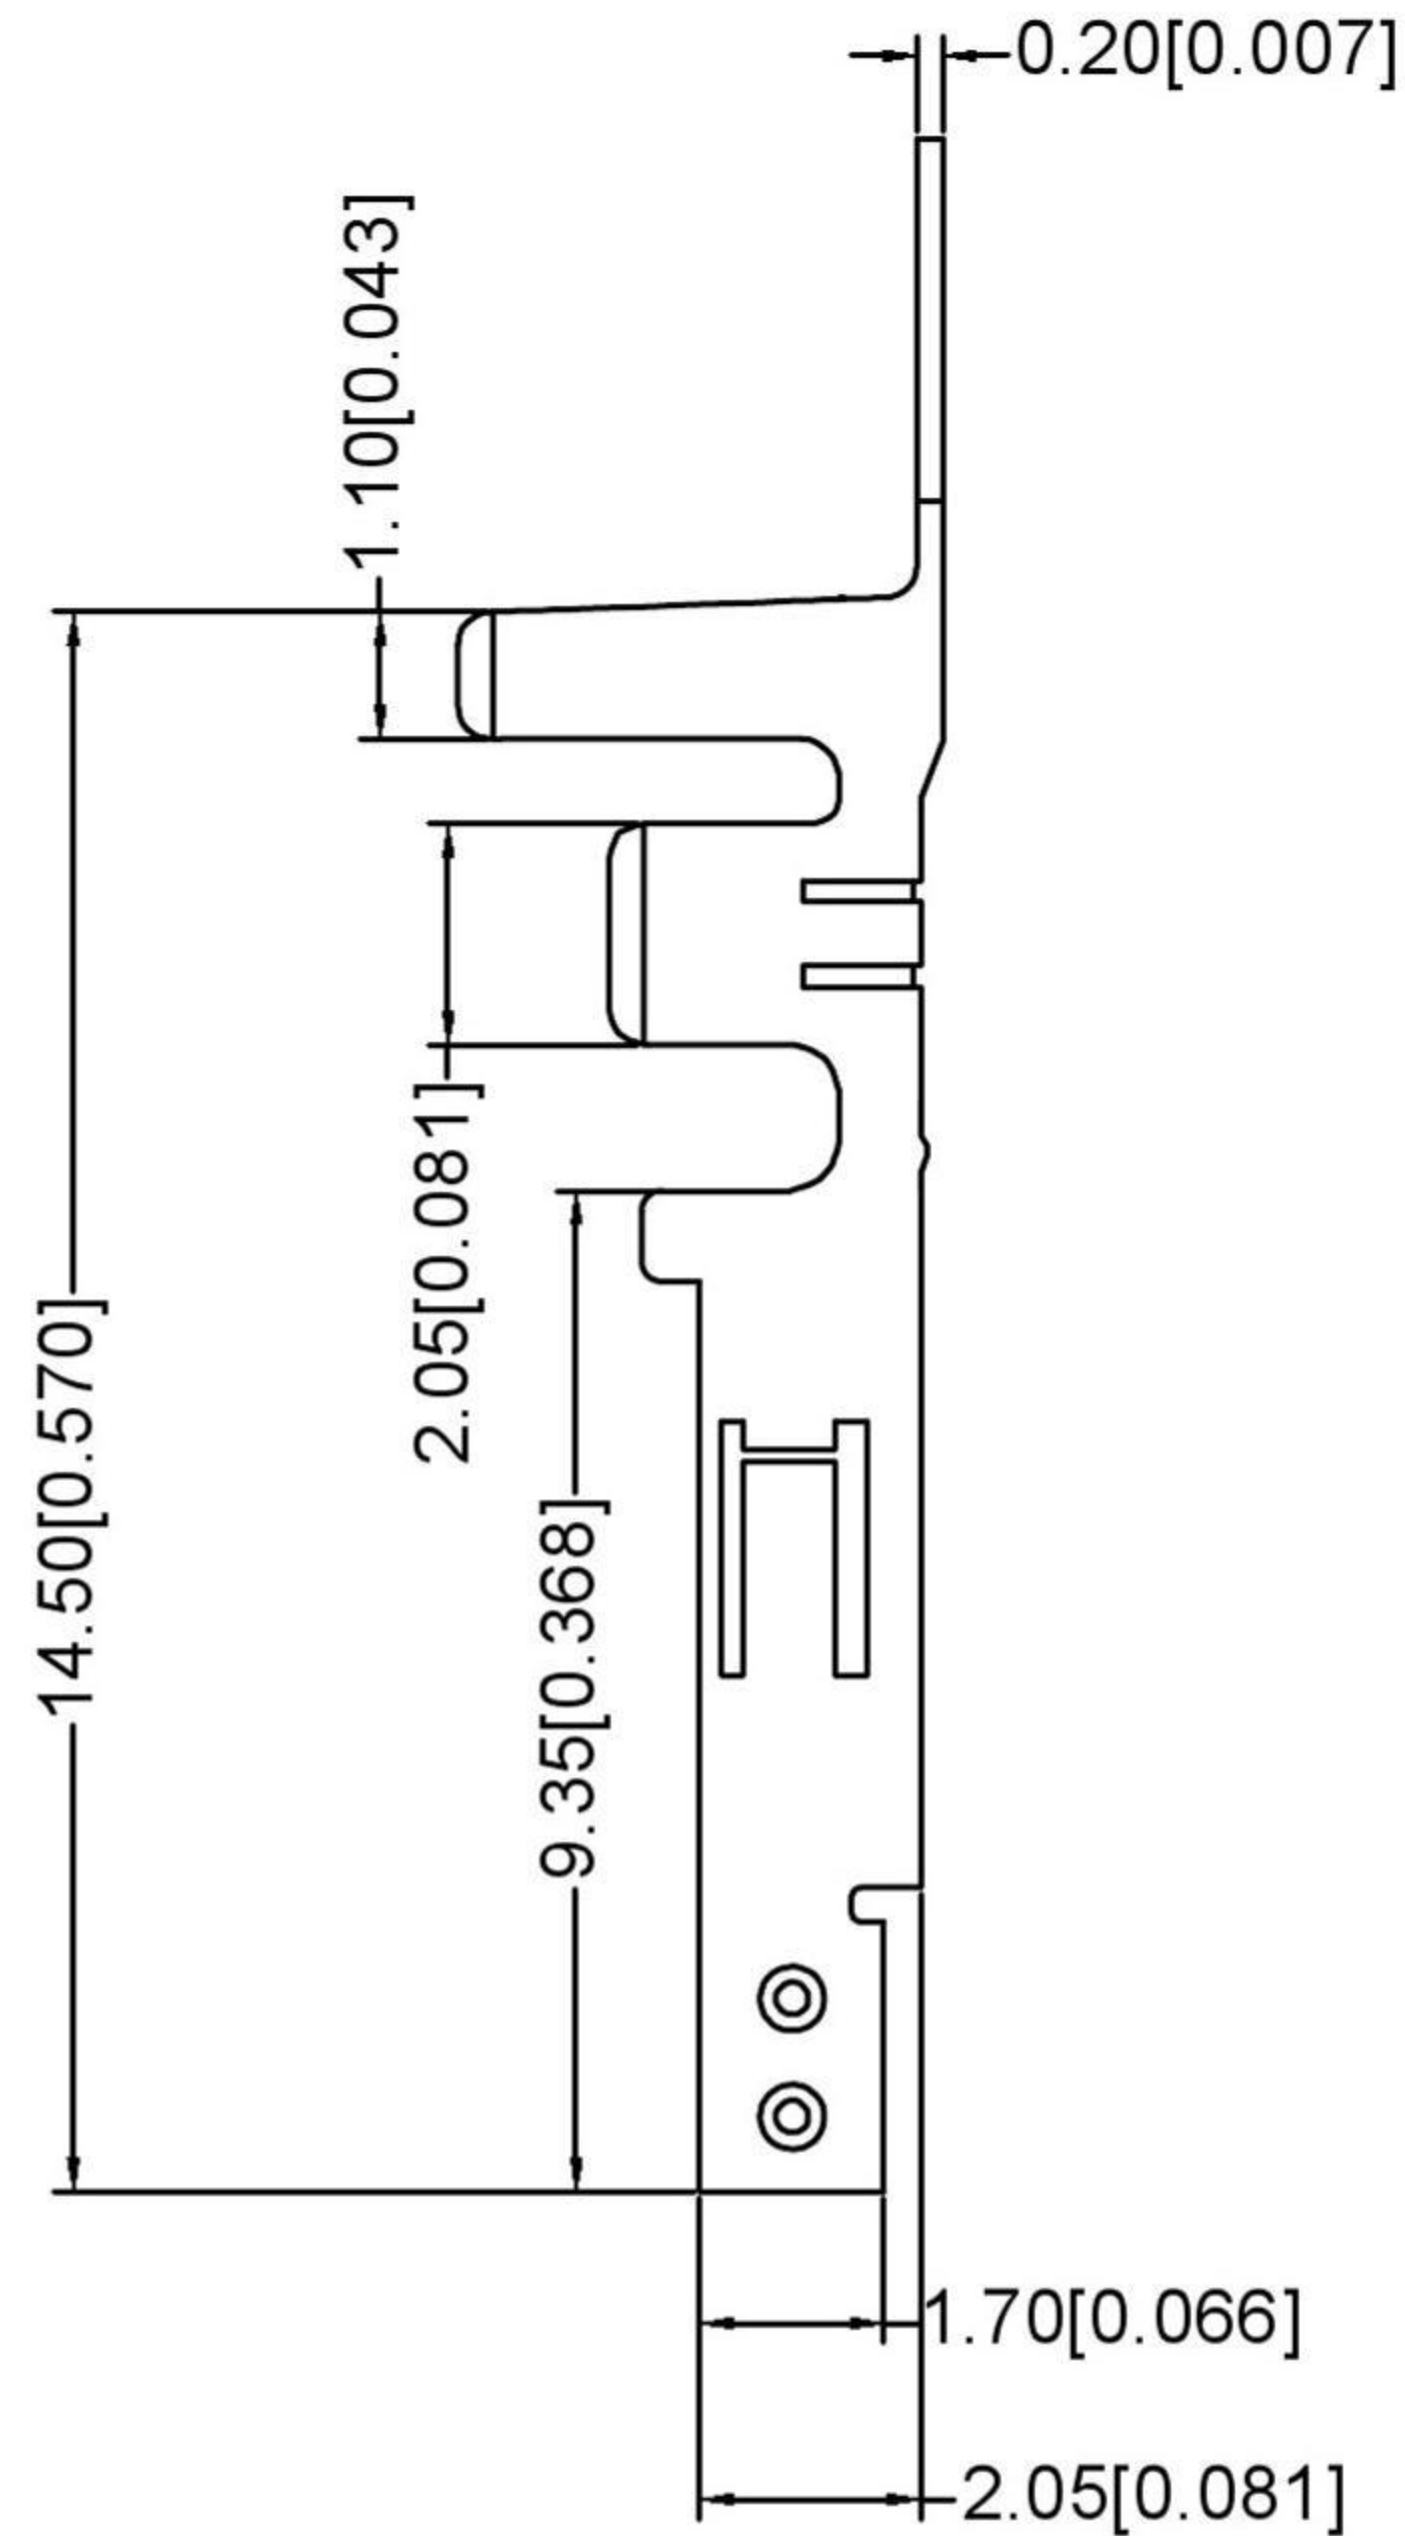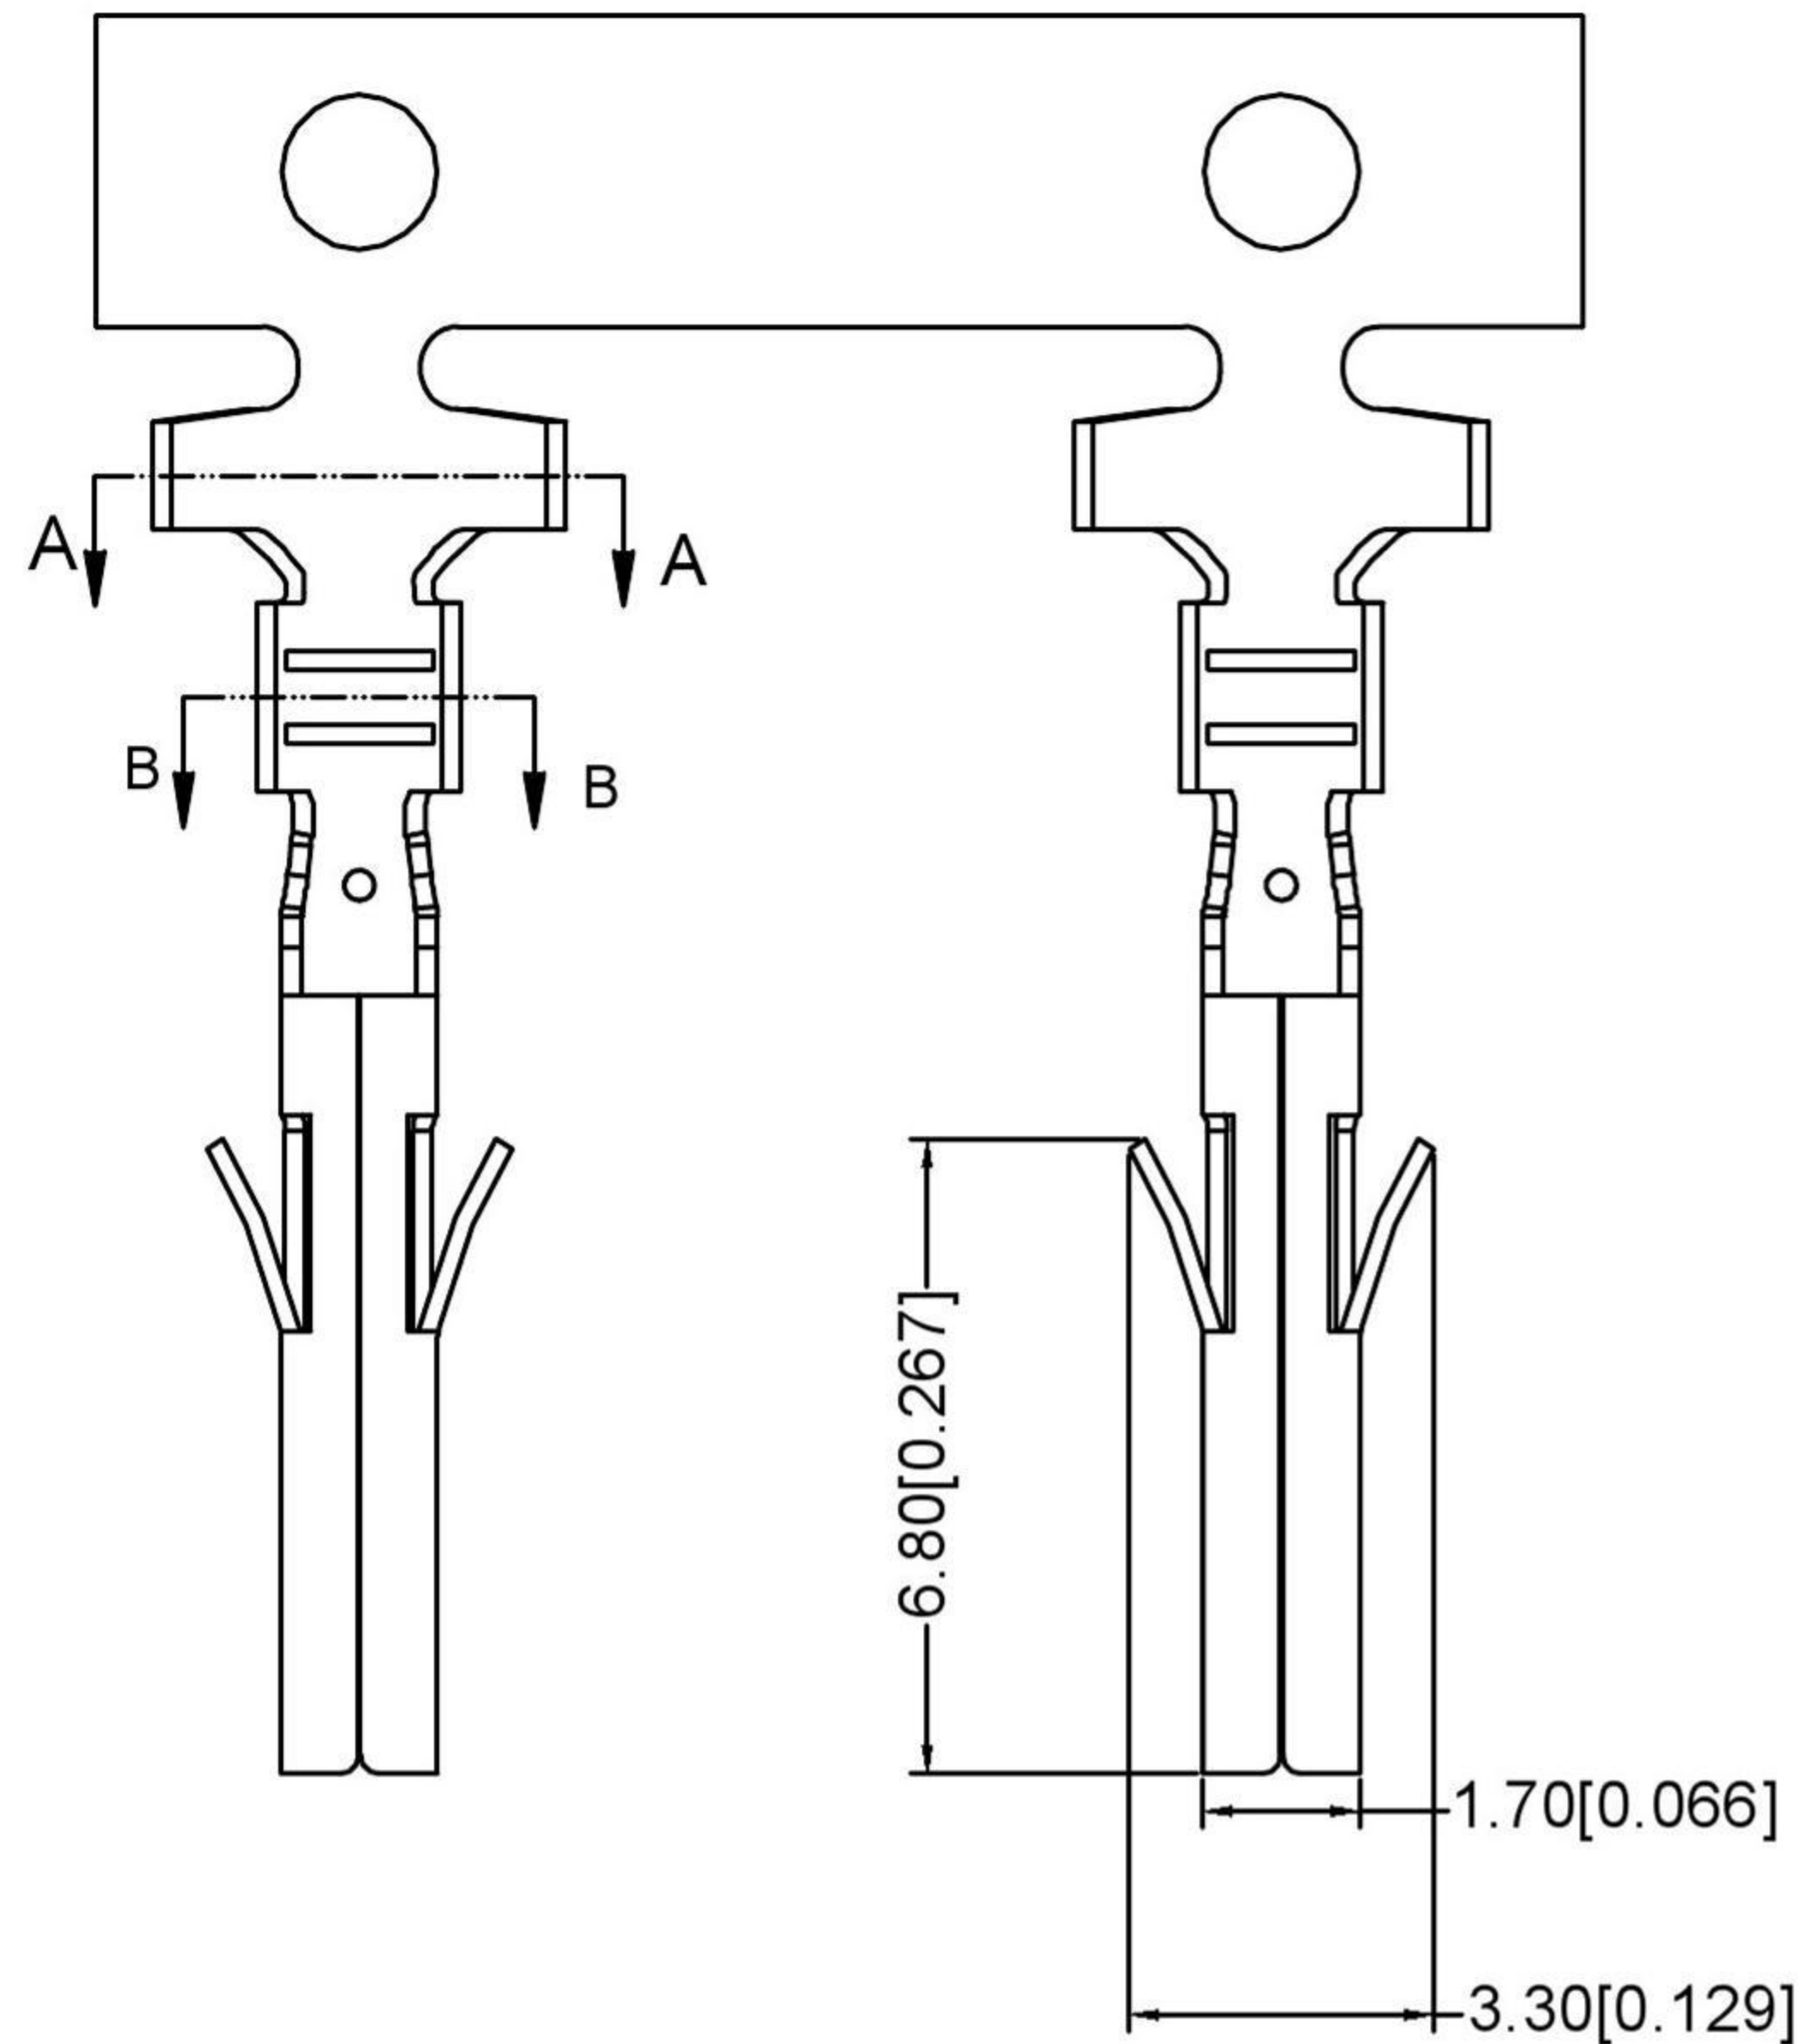

Specifications:
 规格:
 Voltage rating: 600V AC/DC
 额定电压: 600V AC/DC
 Current rating: 9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage: 1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range: -25°C +85°C
 温度范围: -25°C +85°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing: ≤20mΩ
 环境测试后: ≤20兆欧

X9357 T F -X SN X-H
 ① ②③ ④ ⑤ ⑥ ⑦

- 01 Series Number
- 02 Category: T-terminal
- 03 Shape: F-Female
- 04 Material: B-Brass; P-Phosphor Bronze
- 05 Plating style: SN-Bright tin plating
- 06 Plating method:
Blank-Stamping before plating;
- 07 Special No: H-High Leads

X9357TF-PSN-H	Phosphor Bronze	AWG#16-24	3.10mm(Max)	Stamping Before Plating :30u" MIN. Ni70u"Sn MIN.	X9357HM
X9357TF-BSN-H	Brass				
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable

REVISIONS				UNSPECIFIED TOLERANCES		DSND	SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DATE	REVISED	APPROVED	ANGLAR	±5°		DWN	VIEW:	PART NO.:		
			L ≤ 4	±0.2		CHKD	UNIT: mm/in	DWG NO.:		
			4 < L ≤ 16	±0.3		APPD	SIZE: A4			
								WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD			1/1	A0