

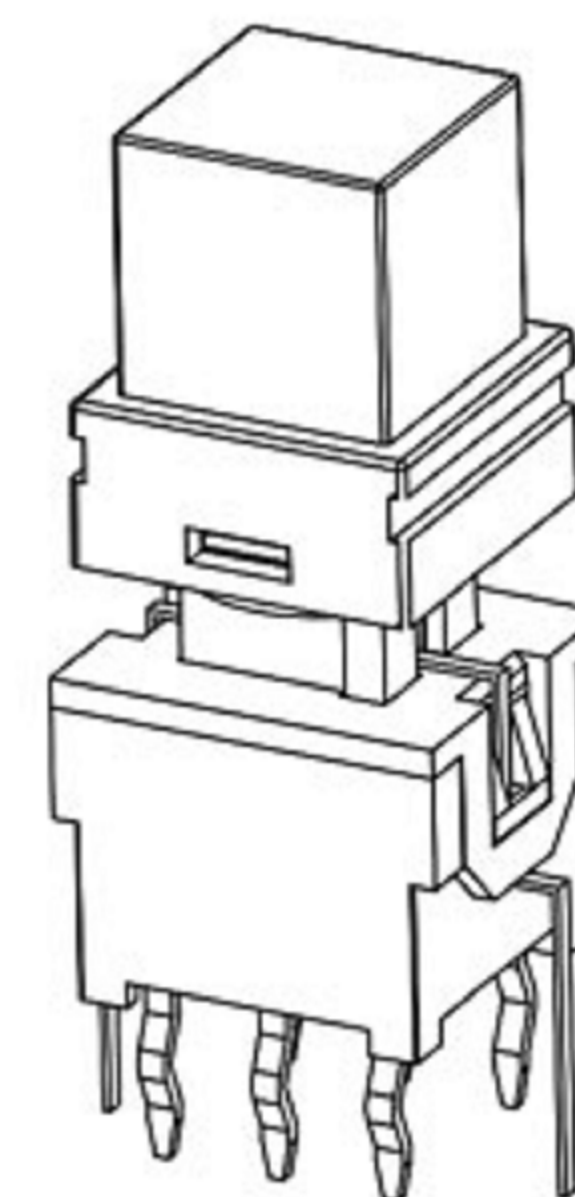
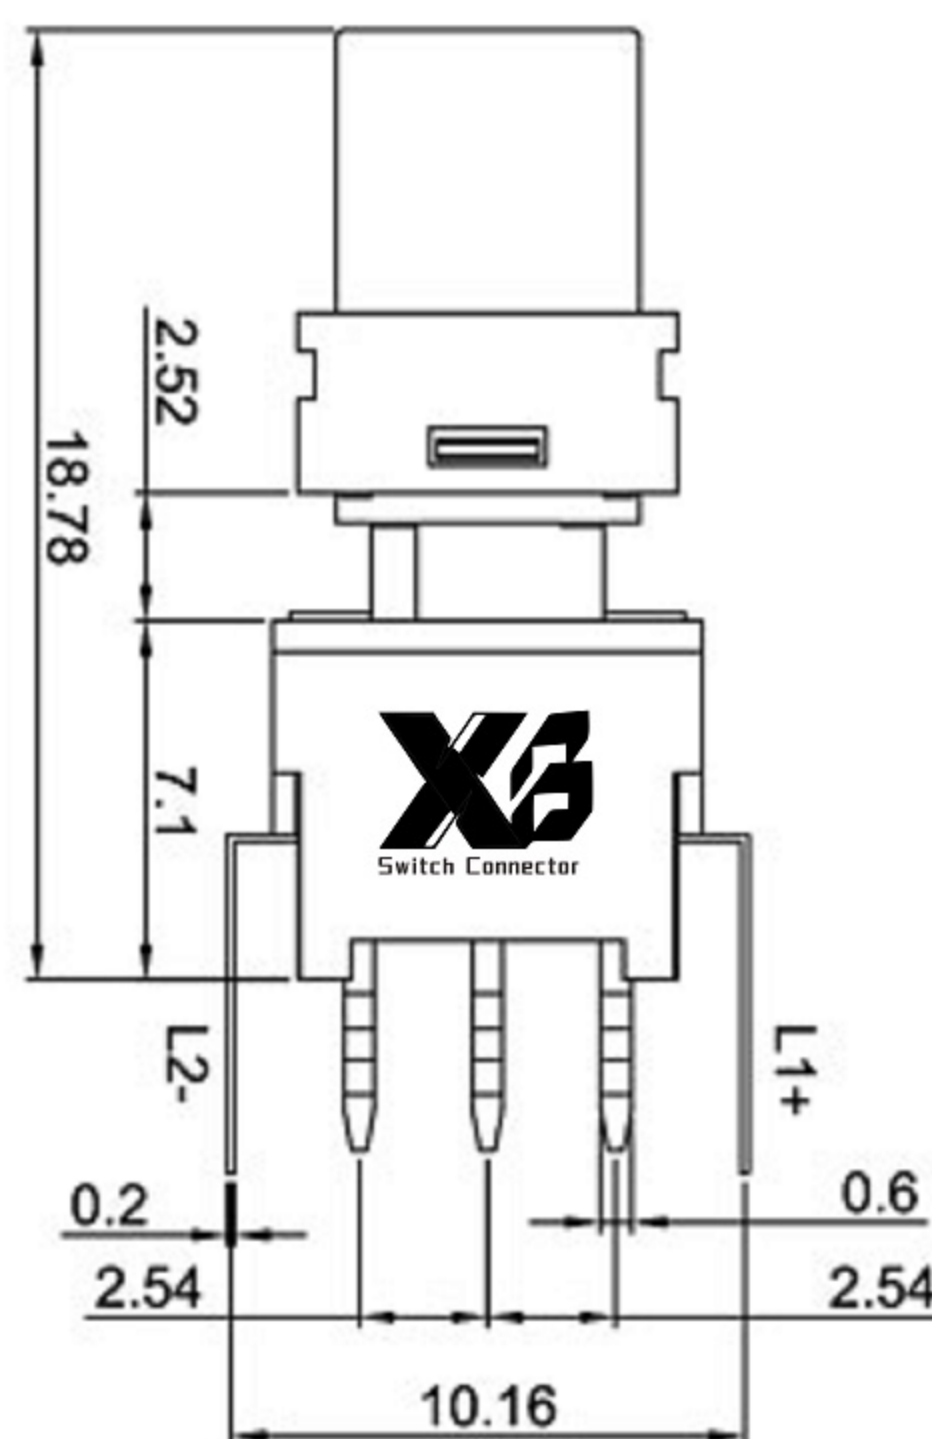
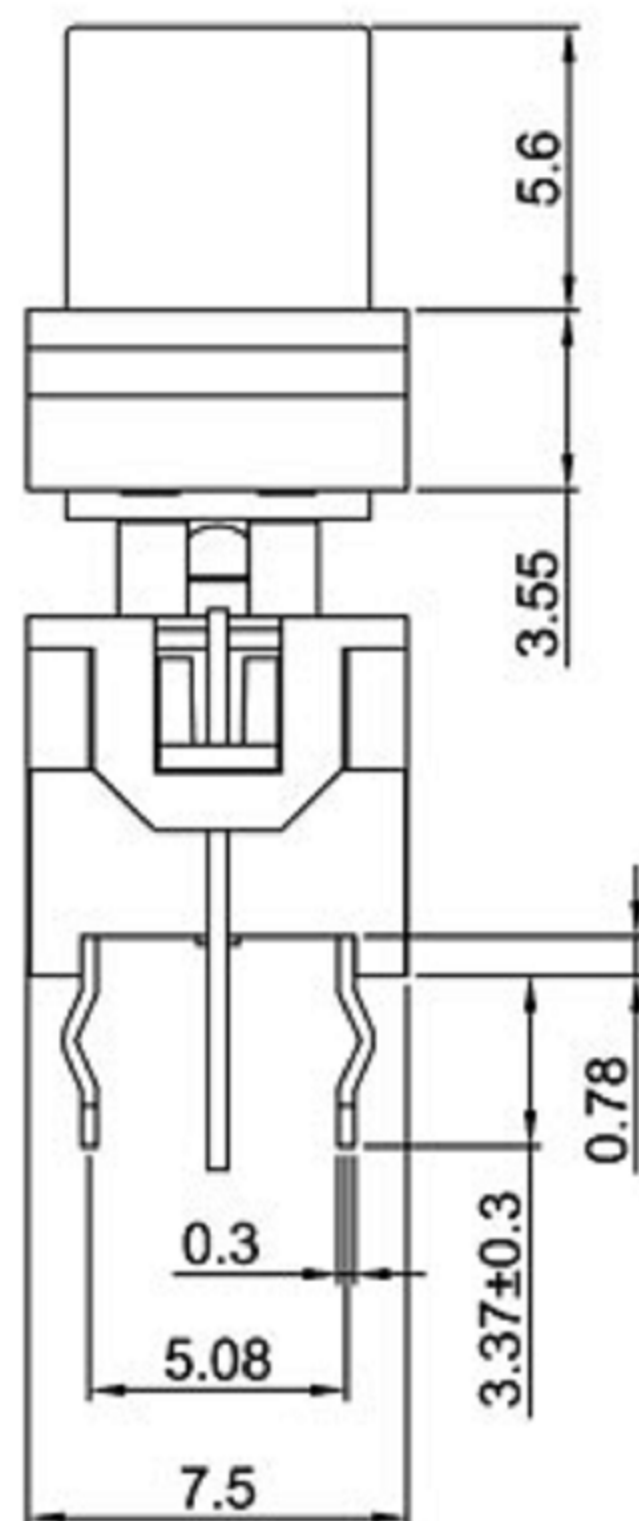


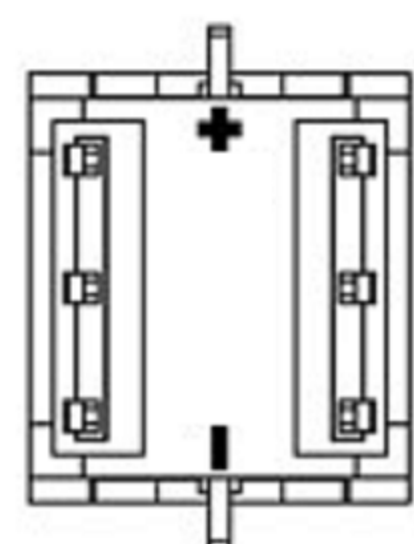


CAD FILE:

ROHS

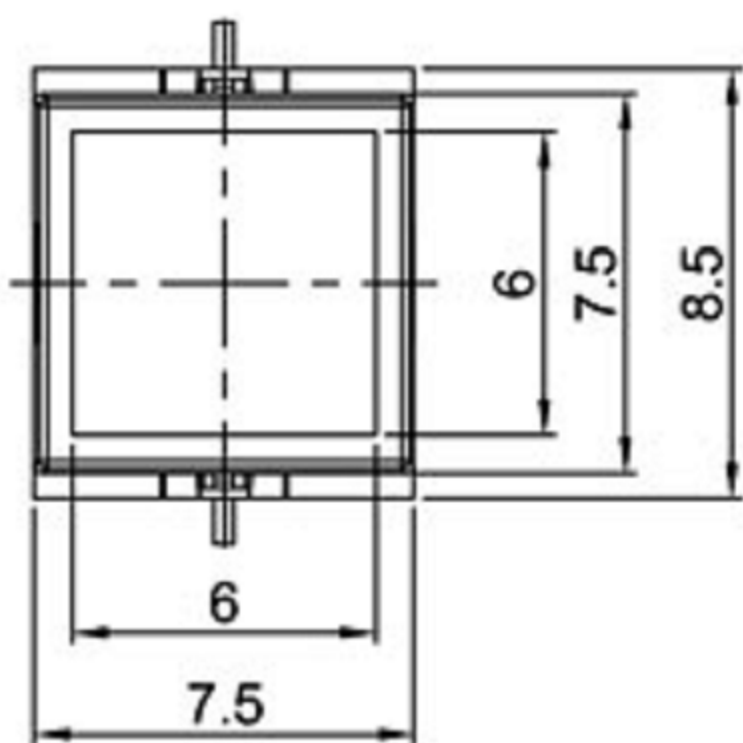


RG	Red	红色
	Green	翠绿色
G	Green	绿色
W	White	白色
U	Blue	蓝色
Y	Yellow	黄色
O	Orange	橙色
R	Red	红色
灯发光颜色 X Emitted color X		

CIRCUIT

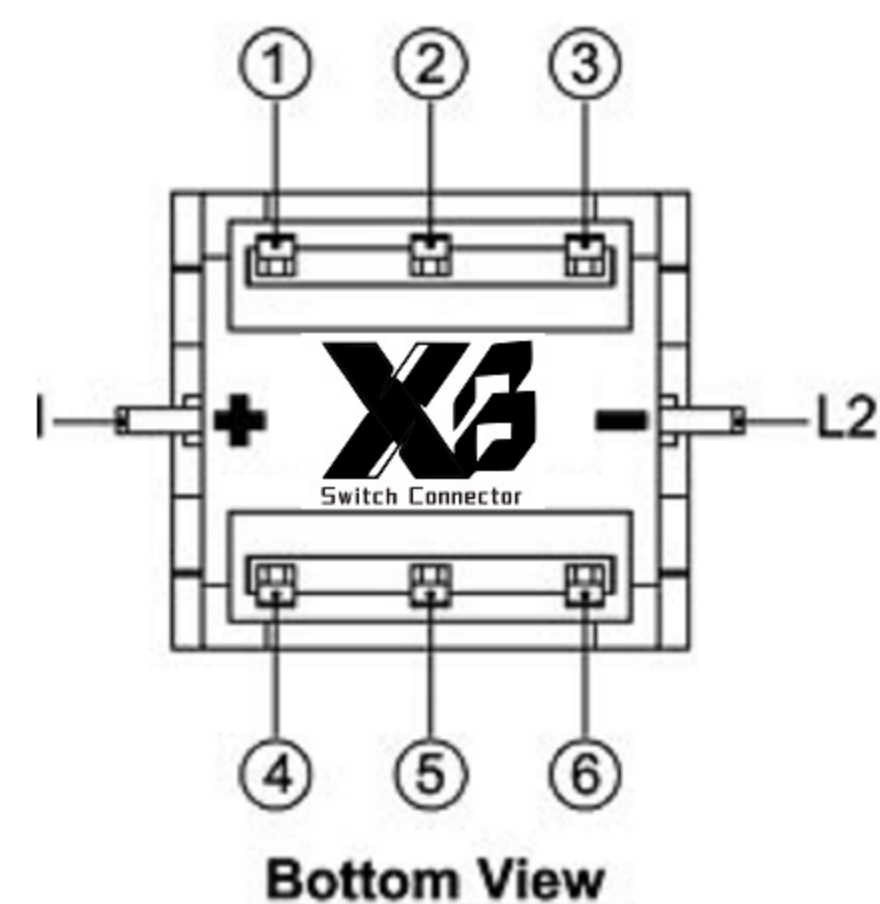

Type	Switch Action		Circuit
Lock	Normal ON	Push to lock ON	
Connected Terminals	1 - 2	2 - 3	
	4 - 5	5 - 6	
No Lock	Normal ON	Push to lock ON	
Connected Terminals	1 - 2	2 - 3	
	4 - 5	5 - 6	
LED Circuit			

P.C.B. LAYOUT

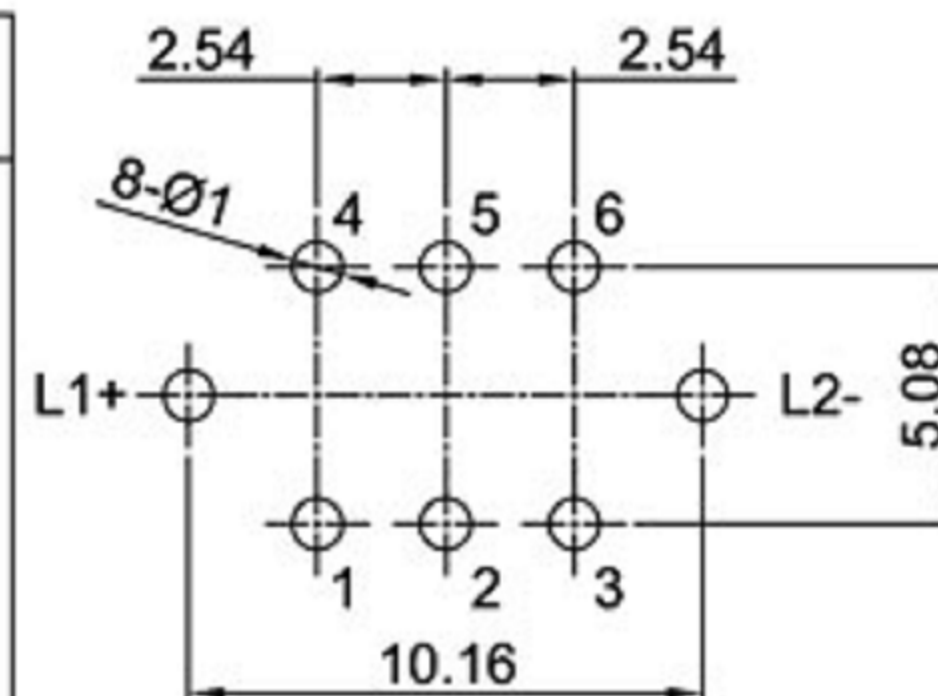

带灯按键开关性能电气

Circuit:DPDT 2P2T

Current Rating:100mA

Voltage Rating:30VDC

Dielectric withstanding voltage :250VAC ffor 1 minute

Contact Resistance:100m0 Max .(initial)

Insulation Resistance:100MQ Min.

Operating Force:1 50±100(MOM) .

Total Travel: 2. 5±0.1 mm

Opearating life:50,000 Cycles Min

Soldear Specifications:260°C for 5 Seconds

Function:Momentary or self-lock

Openrating Temperature. :-20°C~+ 70°C

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE :Button Switch With Light			UNIT : mm	DRWG NO.: XB-LED-TB-018D
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-LED-TB-018D			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				