

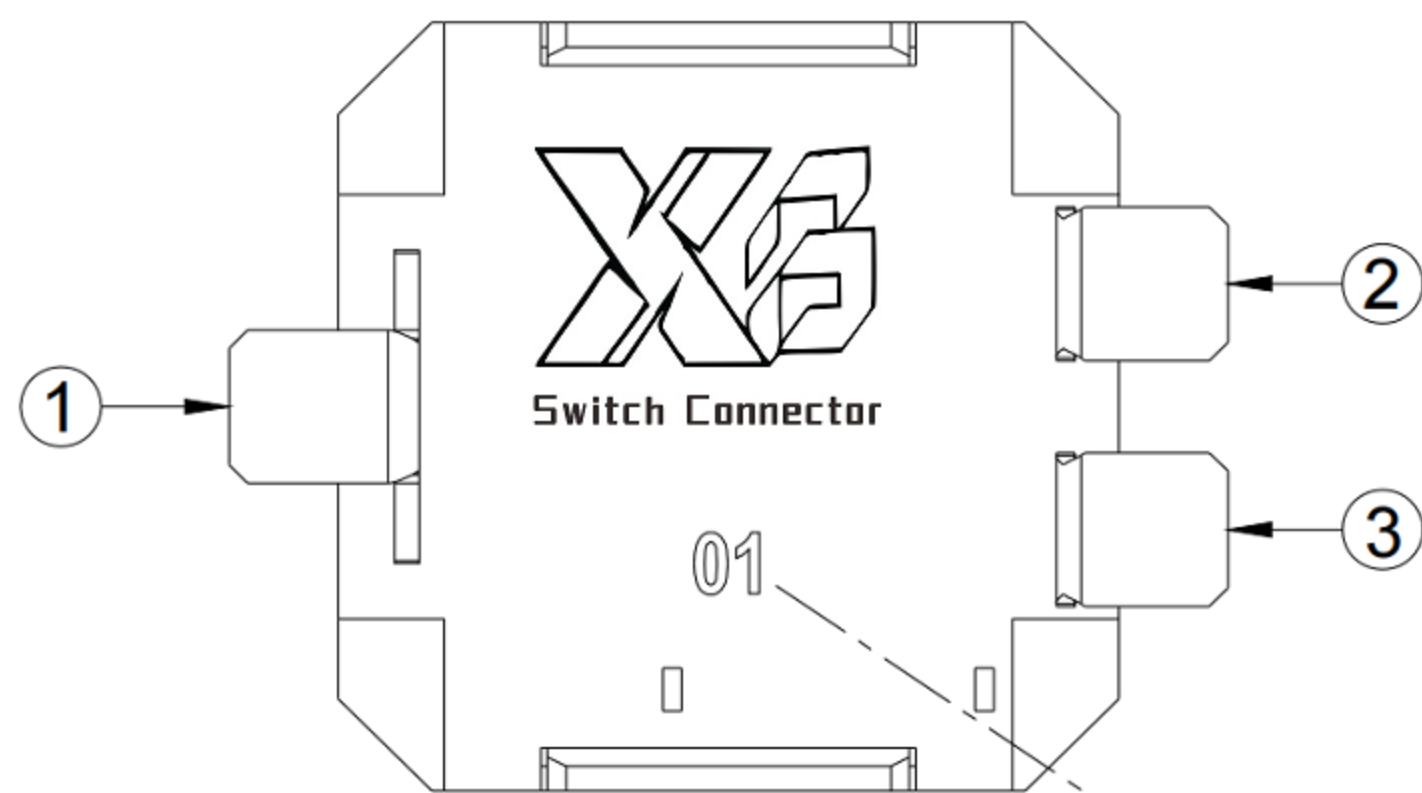
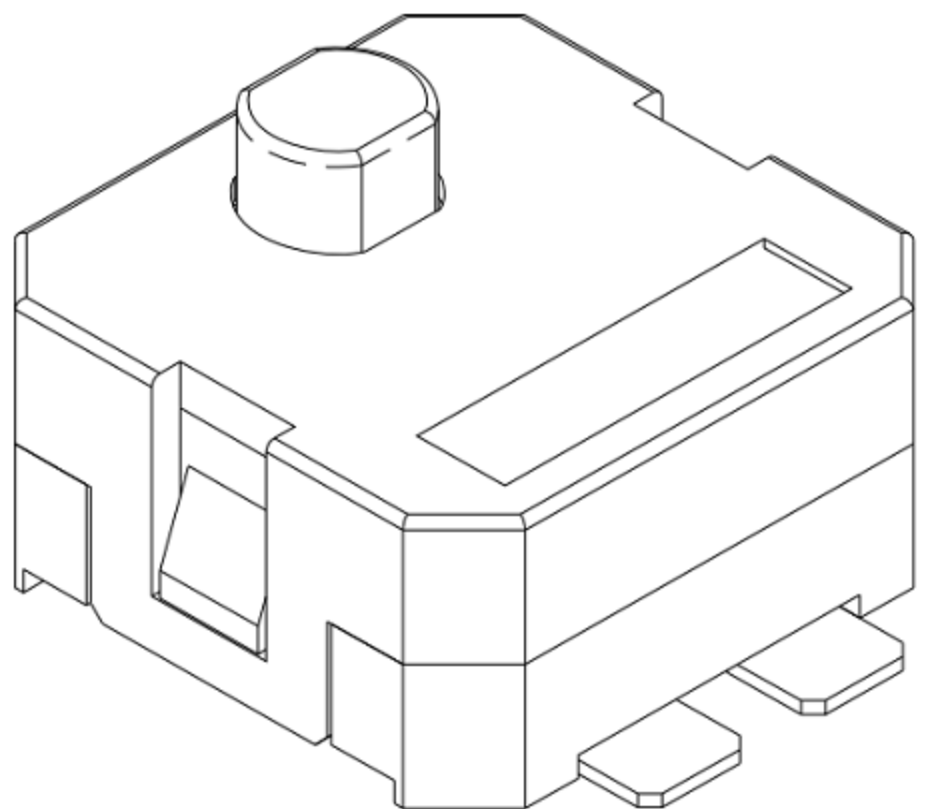
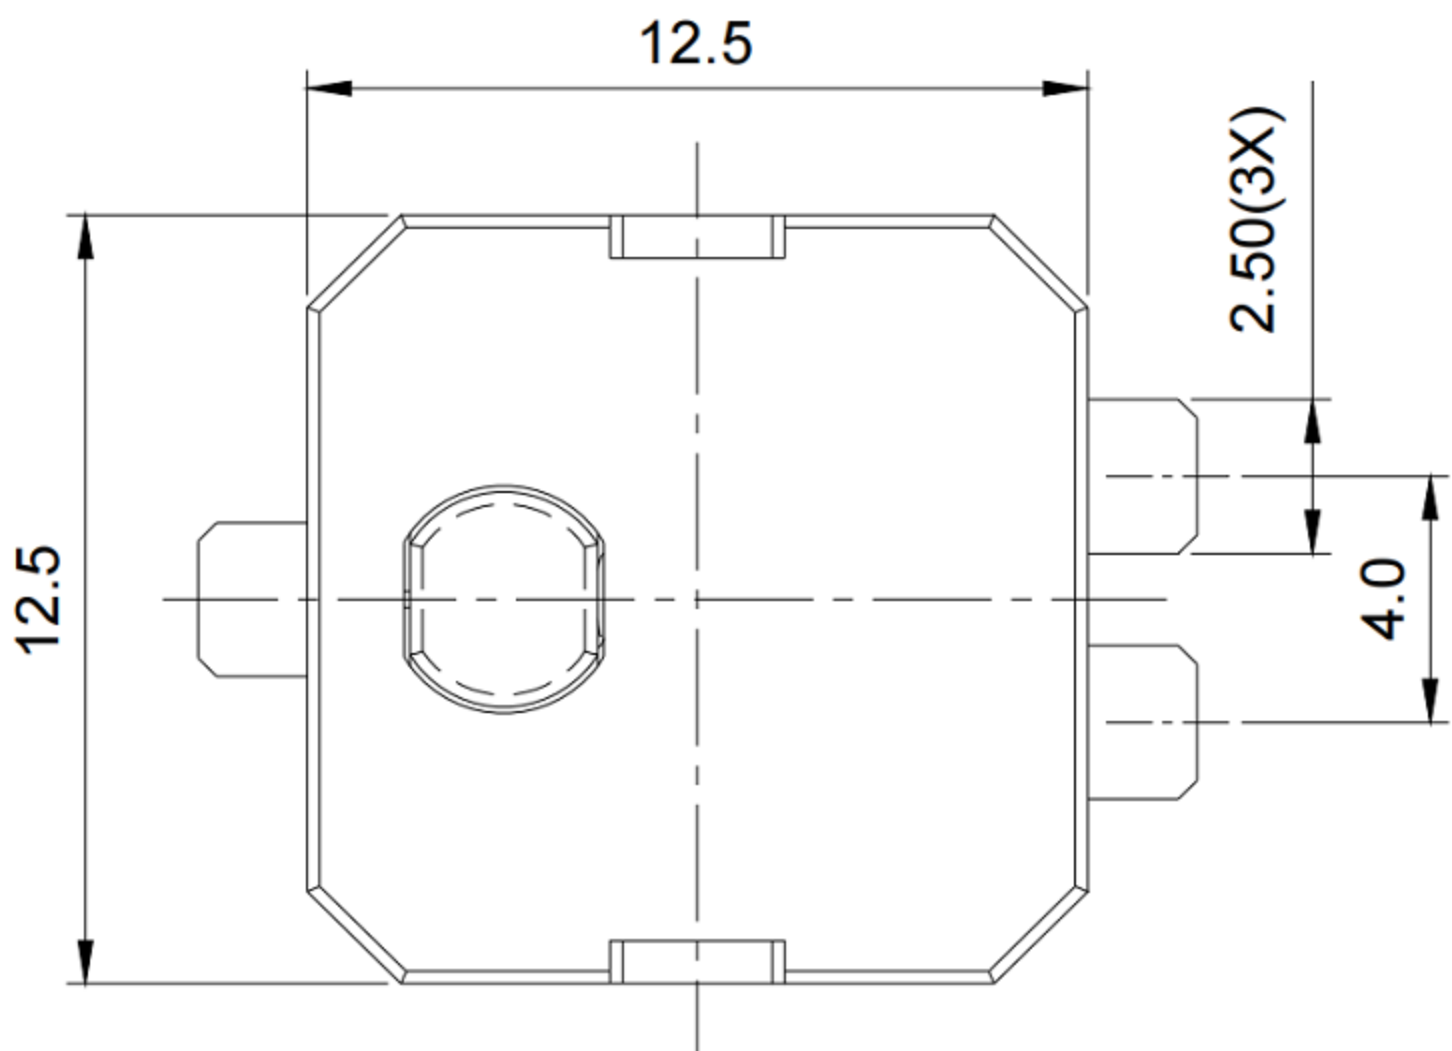


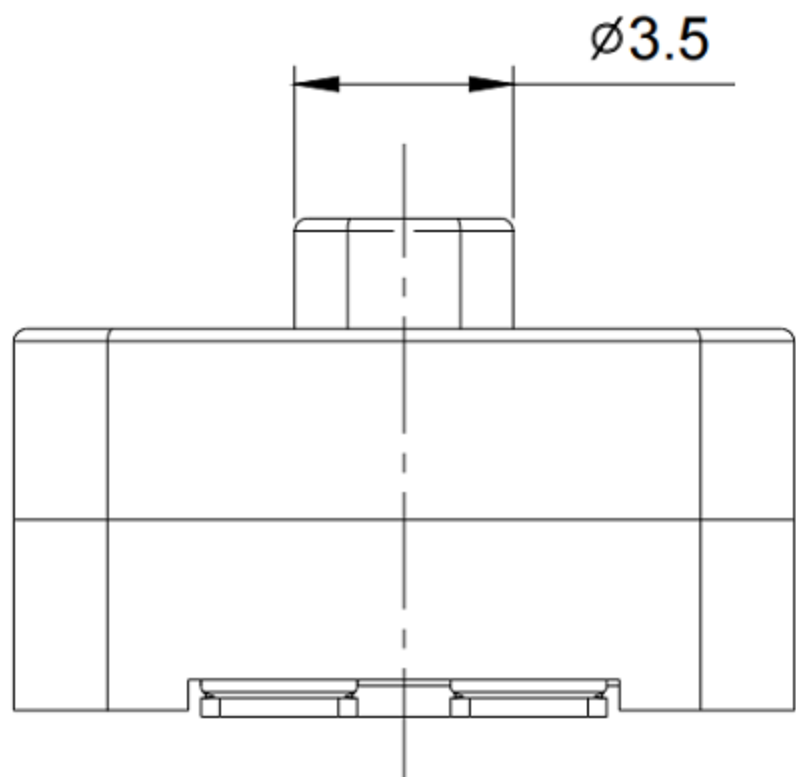


CAD FILE:


ROHS

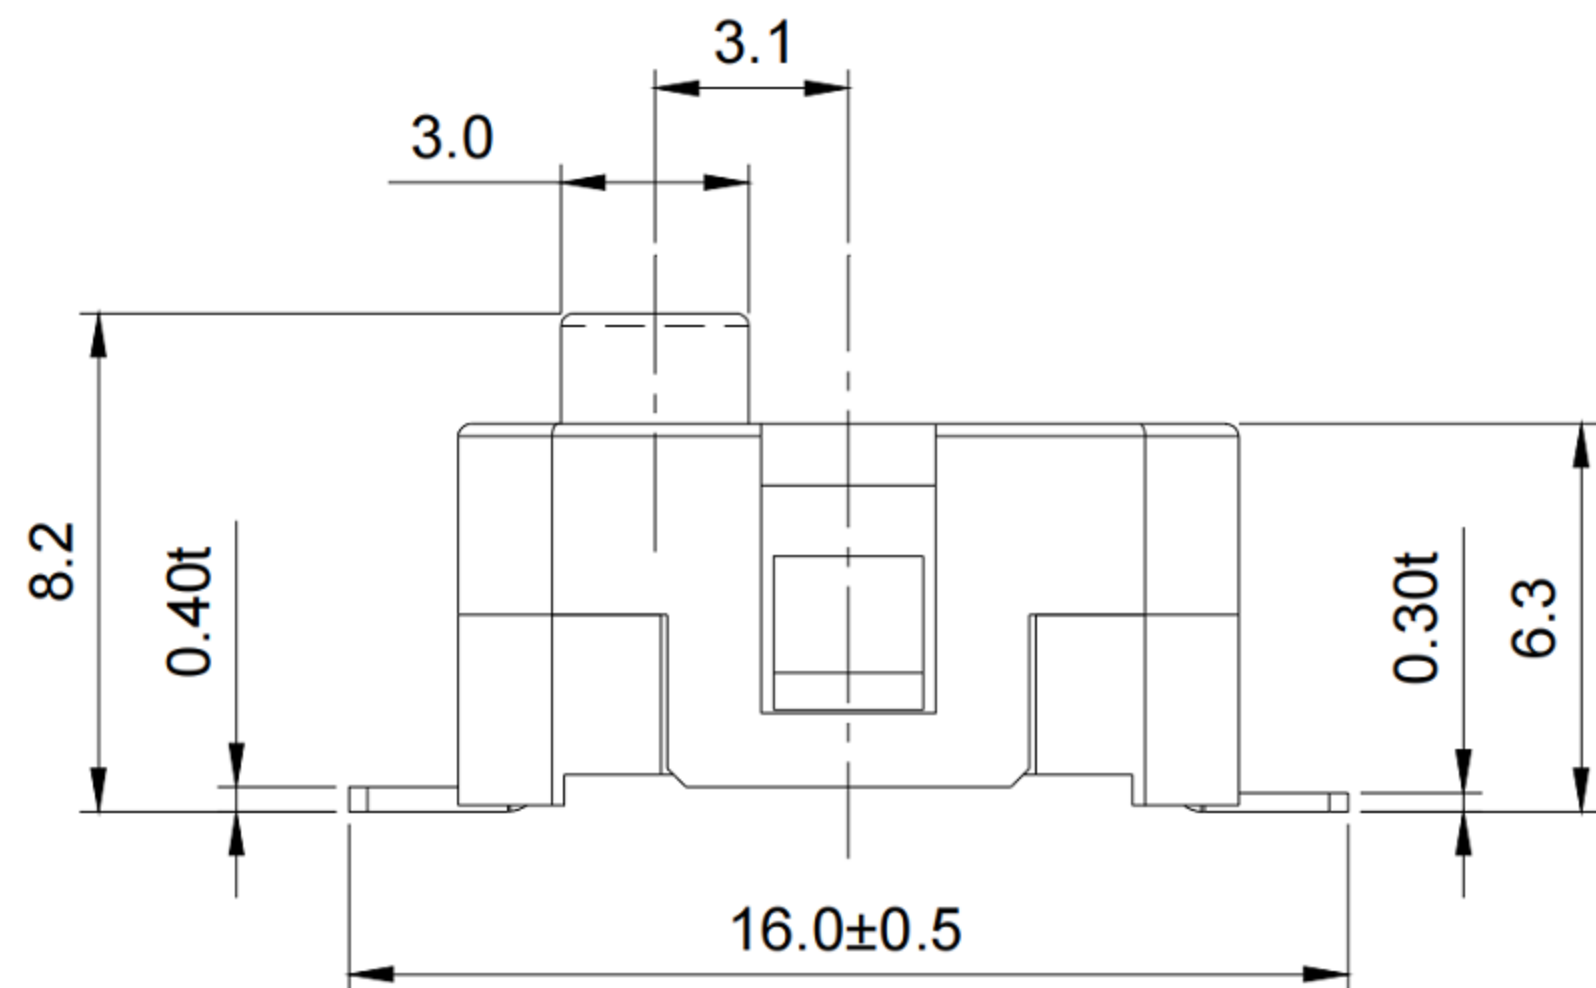

Cavity NO.

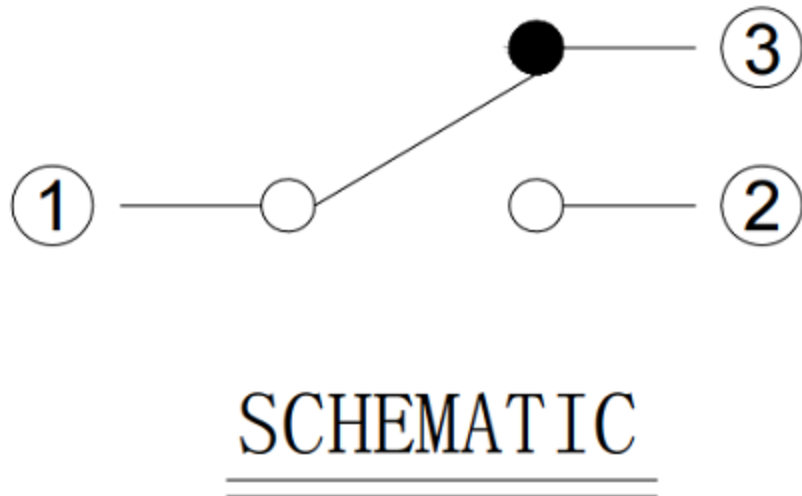

SCHEMATIC

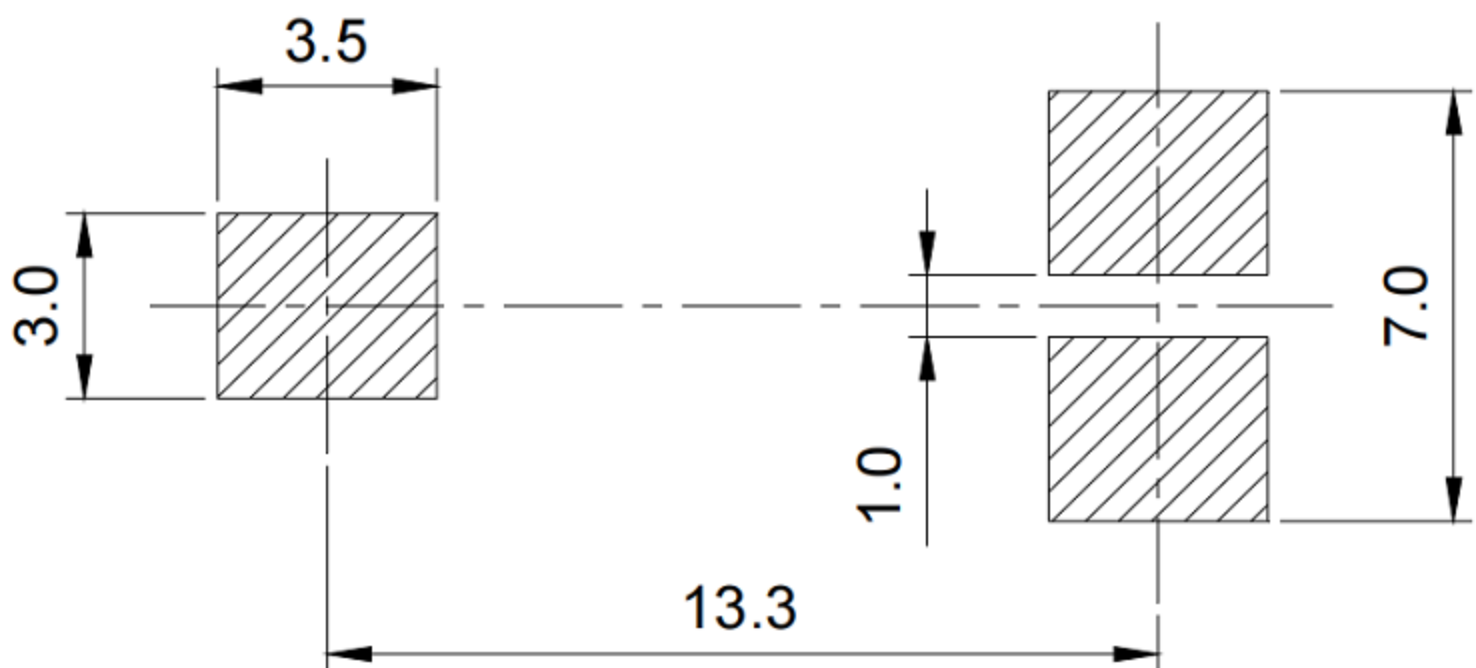

P. C. B. LAYOUT

- NOTES:
- 1.RATING: ☐ 5(3)A 125 / 250VAC
☐ 10.5A 125 / 250VAC
 - 2.CONTACT RESISTANCE: 50mΩ Max (Initial).
 - 3.INSULATION RESISTANCE: 100MΩ 500VDC FOR 1MIN
 - 4.DIELECTRIC STRENGTH: 500VAC(50/60Hz) FOR 1MIN
 - 5.ELECTRICALLY LIFE: 10,000 CYCLES MIN
 - 6.OPERATION FORCE: 250±100g .
 - 7.SWITCH ON TRAVEL: 0.5±0.2 mm
 - 8.TOTAL TRAVEL: 0.80mm MAX.
 - 9.OPERATING TEMPERATURE RANGE: -25°C~+85°C

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.: XB-MX-6312M
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-MX-6312M			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					